

Product brief

TLE9243QK

Transmission power management IC



ISO 26262
compliant

The TLE9243QK is a power management IC including the complete power supply functionality as well as application specific features for transmission systems.

The power supply includes a buck and boost pre-regulator supplying post-regulators for microcontroller supply, communication supply and a precise voltage reference. In addition, two 5 V trackers are available to supply off-board sensors.


Beside the power supply functions, the TLE9243QK provides application-specific functionality - sensor interfaces for three channels including one 9 V LDO per channel as well as three channels to drive external n-channel power switches, including a charge pump which can also be used to supply an active reverse polarity protection circuitry.

The device supports different modes: standby, normal and after-run mode. The after-run mode with a stop counter function supports operations after power down.

The TLE9243QK comes with a window and functional watchdog, monitoring functions and different outputs for failure reactions and indications. It has been developed according to ISO 26262 targeting systems up to ASIL-D and supports an extended junction temperature range of up to 175°C.

Applications

- > Electro-hydraulically controlled automatic transmission systems
- > Electro-hydraulically and electro-mechanically controlled double clutch transmission system
- > Electro-hydraulically controlled continuous variable transmission systems

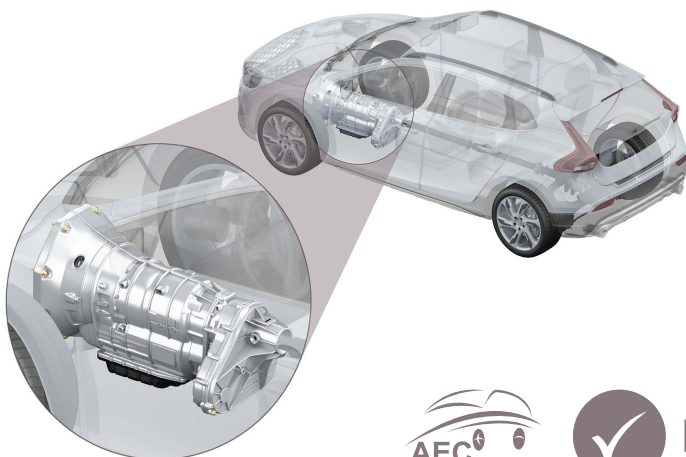

Key features

- > Serial step-up and step-down pre-regulator with wide input voltage range from 3.0 to 40 V
- > 5 V low drop voltage regulators for MCU and communication supply
- > 5 V high accuracy voltage reference
- > Two 5 V voltage trackers for sensor supply
- > Voltage, current, clock and temperature monitoring with reaction and indication functions
- > Configurable window and functional watchdog
- > 32-bit 10 MHz SPI with 8-bit CRC
- > Three high-side drivers to control external n-channel MOSFETs
- > Three 9 V low drop voltage regulators for wheel speed sensor supply
- > Three channel wheel speed sensor interface
- > Voltage battery switch to reduce quiescent current

Key benefits

- > Integrated transmission system specific features allowing system cost optimization
- > Developed acc. to ISO 26262 enabling systems up to ASIL D
- > AEC Q-100 Grade 0 qualified

www.infineon.com



RoHS

