

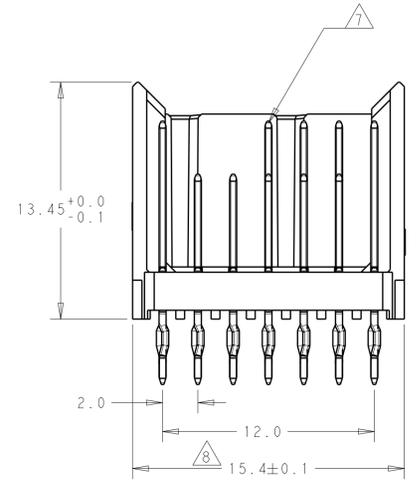
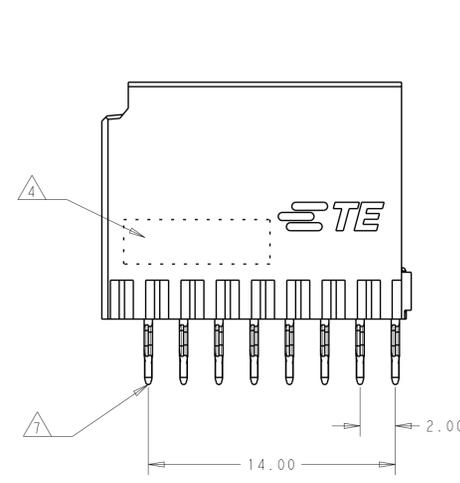


REVISIONS				
P.	LTN	DESCRIPTION	DATE	APPROV
A		INITIAL RELEASE	14DEC2018	FL HL



CONNECTOR ASSEMBLY EXAMPLARY LOADED 6

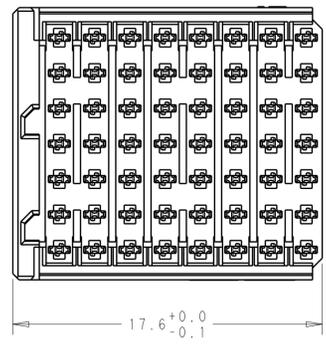


CONTACT LAYOUT

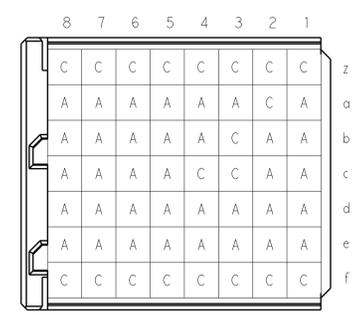

CONTACT DIMENSIONS

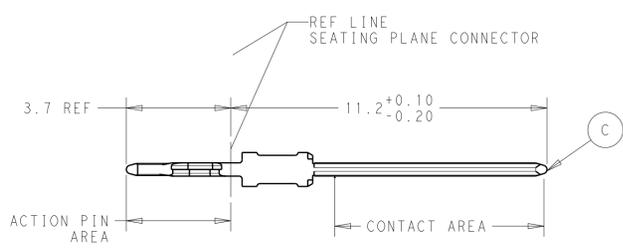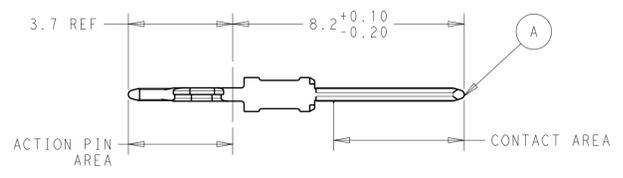

RECOMMENDED PCB-HOLE LAYOUT COMPONENT SIDE SHOWN

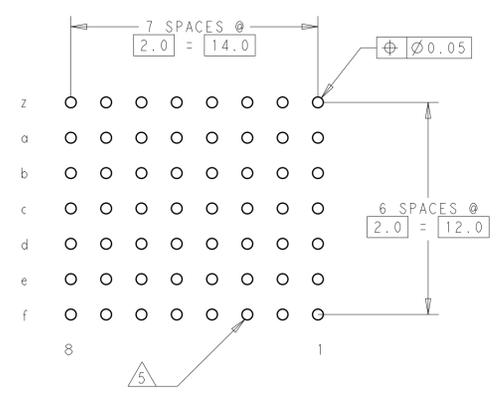

PLATED THRU HOLES PARAMETERS REFERENCE APPLICATION SPECIFICATION

- 1 MATERIAL:  
CONTACT: PHOSPHOR BRONZE.  
HOUSING: GLASS-FILLED POLYESTER.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5µm MIN TIN.  
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE. ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS, MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.
- 5 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID PATTERN DEFINED BY CONTACT LAYOUT.
- 6 FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".
- 7 FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".
- 8 TO BE MEASURED AT BOTTOM OF SHROUD.

<span style="border: 1px solid black; padding: 2px;">2</span> / <span style="border: 1px solid black; padding: 2px;">3</span>	2336514-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: FRED LIU 15MAY2018	<b>STE</b> TE Connectivity	
DIMENSIONS: mm		CHK: ALEX SHOAL 15MAY2018		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPR: HOPF LIU 15MAY2018	NAME: MALE ASSEMBLY, Z-PACK 2mm HM, 8 COLUMN	
0 PLC ±0.2		PRODUCT SPEC: 108-60123	SIZE: A100779C=2336514	
2 PLC ±0.2		APPLICATION SPEC: 114-19029	RESTRICTED TO: -	
3 PLC ±0.2		WEIGHT: -	SCALE: 4:1 SHEET 1 OF 1 REV A	
4 PLC ±0.2		CUSTOMER DRAWING		
ANGLES ±				
FINISH: SEE TABLE				