
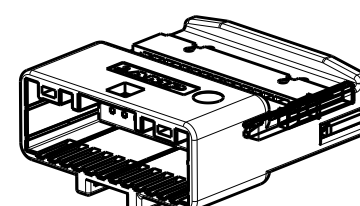





P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	05NOV2008	YD.	HG
	A1	REVISED (ECR-17-009686)	13JUL2017	SJ	KT

D

D

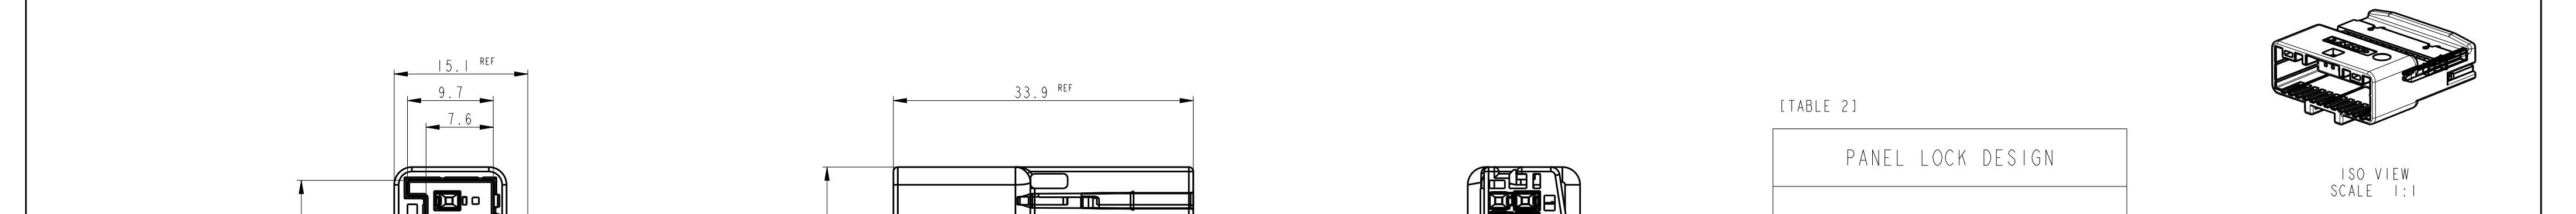


ISO VIEW
SCALE 1:1

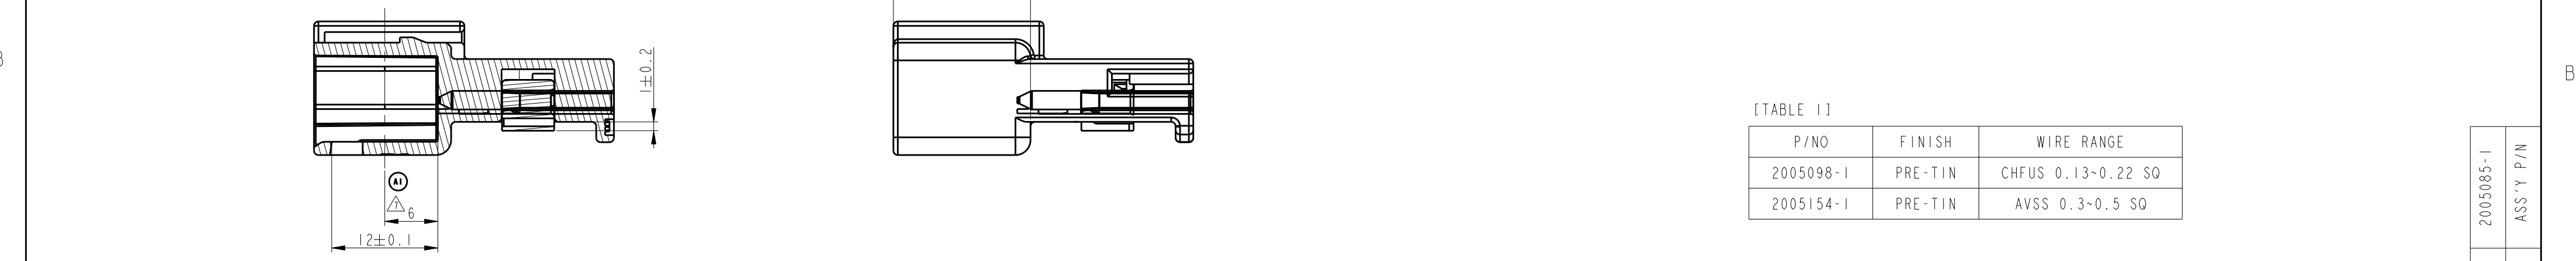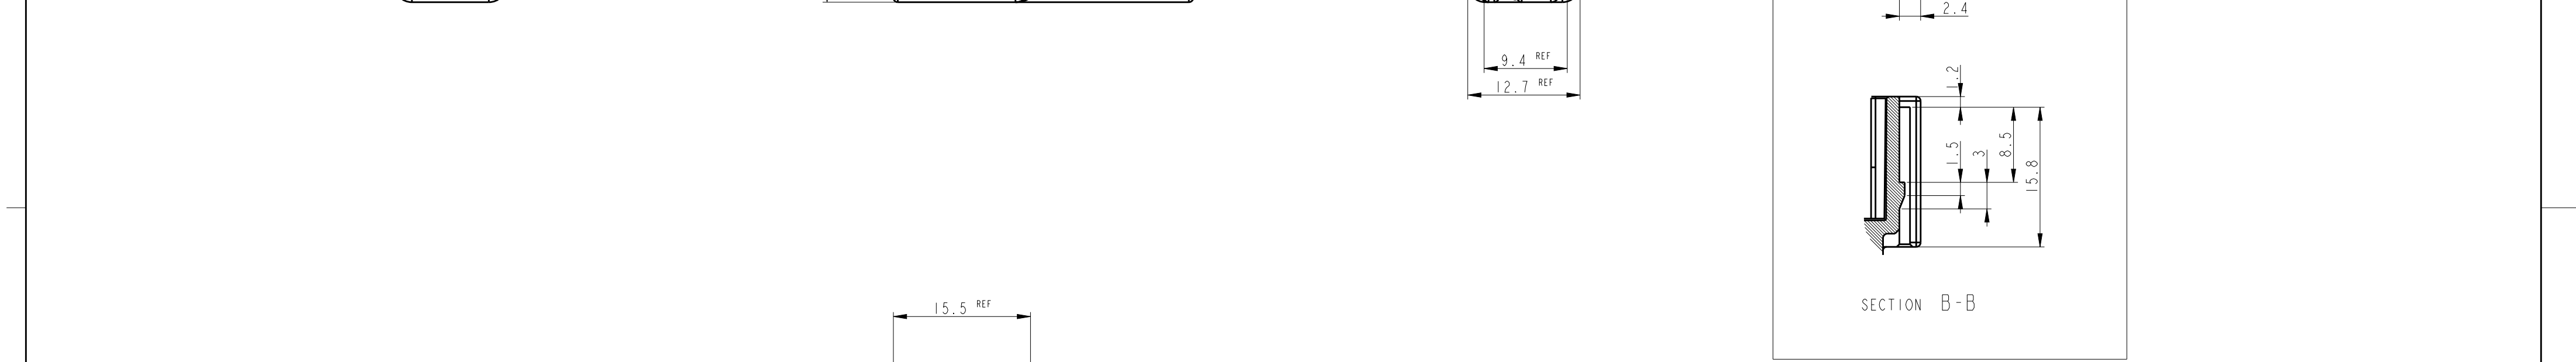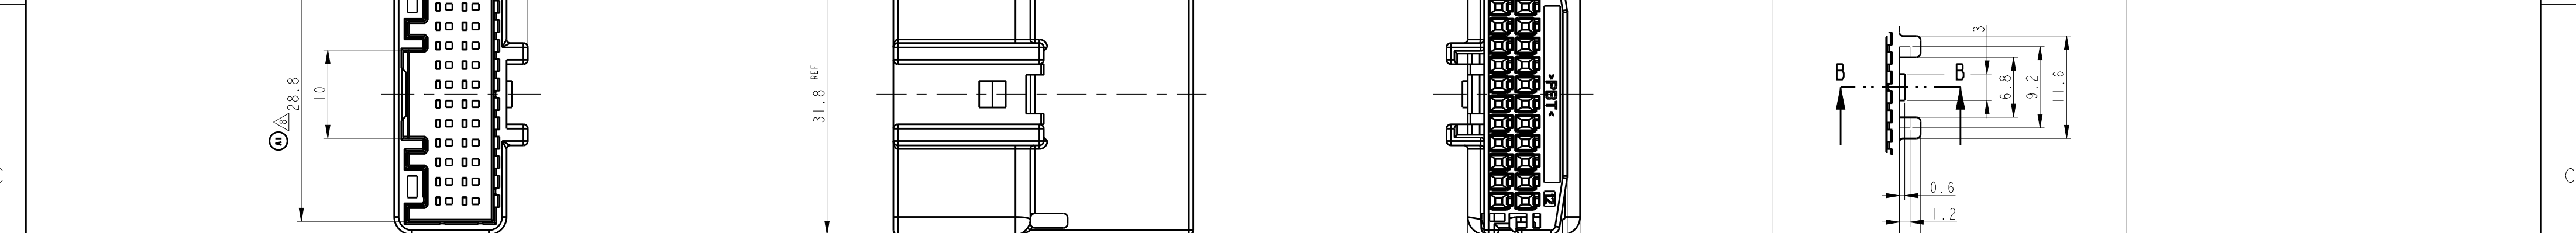

SECTION A-A

[TABLE 2]

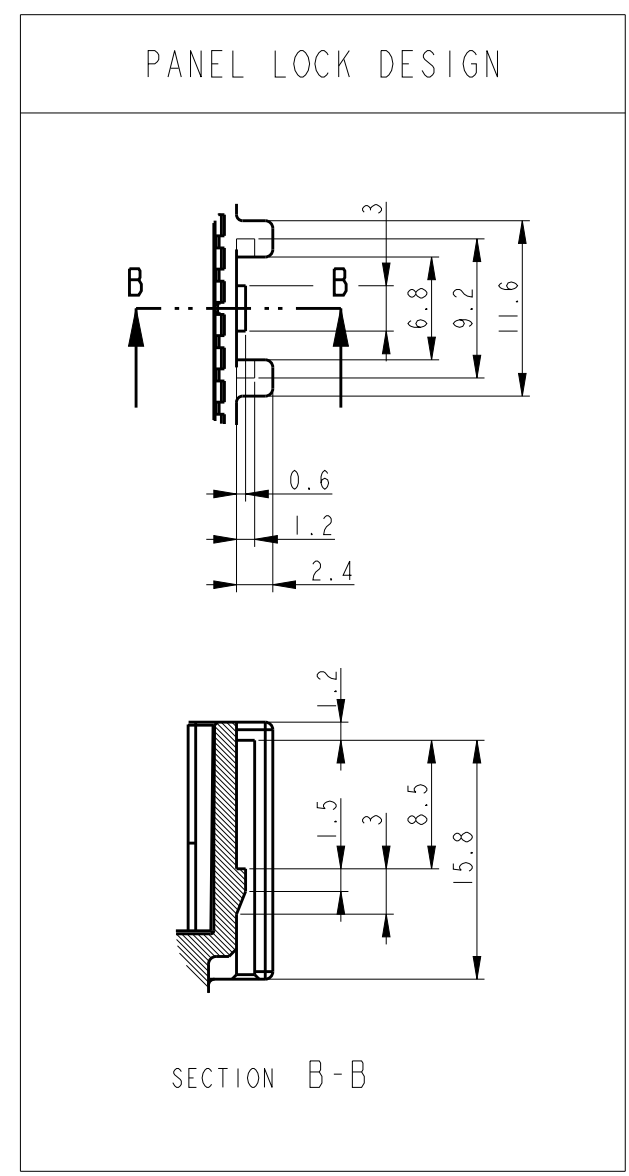

SECTION B-B

[TABLE 1]

P/NO	FINISH	WIRE RANGE
2005098-1	PRE-TIN	CHFUS 0.13-0.22 SQ
2005154-1	PRE-TIN	AVSS 0.3~0.5 SQ

- NOTE
- DBL MUST BE SET TO THE PRE-ASSEMBLY POSITION WITHIN THE CAP HOUSING WHEN SHIPPED TO THE CUSTOMER
 - DBL MUST BE OUT SIDE OF CAP HOUSING AT PRE-ASSEMBLY
 - PART NUMBER OF PLUG HOUSING TO BE MATED : 2005082
 - APPLICABLE TERMINAL : TABLE 1
 - PANEL LOCK VARIATIONS : REFER TO TABLE 2

- ⑥ 6. GENERAL TOLERANCE : ± 0.3 , $\pm 3^\circ$
- ⑥ ③ MEASURING RANGE AT MARKED ③

2	NATURAL	PBT	24P DBL HSG	1
1	NATURAL	PBT	24P CAP HSG	1
NO.	COLOR/FINISH	MATERIAL	DESCRIPTION	QT'Y

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	±

DWN
YD.LEE

CHK
YM.CHOI

APVD
HG.CHO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME
025 24P CAP ASS'Y

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2005085	-

SCALE 2:1	SHEET 1	OF 1	REV A1
--------------	------------	---------	-----------