



# **HARTING**

Circular Connectors

# Circular connectors



Contents	Chapter
Device side	
M8	D03 08
M12	D03 12
M23	D03 23
7/8" HARAX®	D03 35
HARAX® panel feed throughs	D03 50
Cable side	
M8	C03 08
M12	C03 12
M23	C03 23
7/8" HARAX®	C03 35
Cable assemblies	CAB 03
Tooling	TOO 03

# Transforming customer wishes into concrete solutions



The HARTING Technology Group is skilled in the fields of electrical, electronic and optical connection, transmission and networking technology, as well as in manufacturing, mechatronics and software creation. The Group uses these skills to develop customized solutions and products such as connectors for energy and data-transmission/data-networking applications, including, for example, mechanical engineering, rail technology, wind energy plants, factory automation and the telecommunications sector. In addition, HARTING also produces electro-magnetic components for the automobile industry and offers solutions in the field of housing technology and shop systems.

The HARTING Group currently comprises 58 sales companies and production plants worldwide employing a total of about 5,300 staff.



We aspire to top performance.

Connectors ensure functionality. As core elements of electrical and optical termination, connection and infrastructure technologies, they are essential in enabling the modular construction of devices, machines and systems across an extremely wide range of industrial applications. Their reliability is a crucial factor guaranteeing smooth functioning in the manufacturing area, telecommunications, applications in medical technology – in short, connectors are at work in virtually every conceivable application area. Thanks to the ongoing development of our technologies, our customers enjoy investment security and benefit from durable, long-term functionality.

Wherever our customers are, we're there.

Increasing industrialization is creating growing markets that are characterized by widely diverging demands and requirements. What these markets all share in common is the quest for perfection, increasingly efficient processes and reliable technologies. HARTING is providing these technologies – in Europe, the Americas and Asia. In order to implement customer requirements in the best possible manner, the HARTING professionals at our international subsidiaries engage in up-close, partnership-based interaction with our customers, right from the very early product development phase.

Our on-site staff form the interface to the centrally coordinated development and production departments. In this way, our customers can rely on consistently high, superior product quality – worldwide.

Our claim: Pushing Performance.

HARTING provides more than optimally attuned components. In order to offer our customers the best possible solutions, on request HARTING contributes a great deal more and is tightly integrated into the value-creation process.

From ready-assembled cables through to control racks or ready-to-go control desks. Our aim is to generate maximum benefit for our customers – with no compromises!

Quality creates reliability - and warrants trust.

The **HARTING** brand stands for superior quality and reliability - worldwide. The standards we set are the result of consistent, stringent quality management that is subject to regular certifications and audits.

EN ISO 9001, the EU Eco-Audit and ISO 14001:2004 are key elements here. We take a proactive stance towards new requirements, which is why **HARTING** is the first company worldwide to have obtained the new IRIS quality certificate for rail vehicles.



HARTING technology creates added value for customers.

Technologies by HARTING are at work worldwide. HARTING's presence stands for smoothly functioning systems powered by intelligent connectors, smart infrastructure solutions and sophisticated network systems. Over the course of many years of close, trust-based cooperation with its customers, the HARTING Technology Group has become one of the leading specialists globally for connector technology. We offer individual customers specific and innovative solutions that go beyond the basic standard functionalities. These tailored solutions deliver sustained results, ensure investment security and enable customers to achieve significant added value.

Opting for HARTING opens up an innovative, complex world of concepts and ideas.

In order to develop and produce connectivity and network solutions serving an exceptionally wide range of connector applications in a professional and cost-effective manner, HARTING not only commands the full array of conventional tools and basic technologies. Above and beyond these capabilities, HARTING is constantly harnessing and refining its broad base of knowledge and experience to create new solutions that also ensure continuity. To secure its lead in know-how, HARTING draws on a wealth of sources from its in-house research and applications.


Salient examples of these sources of innovative knowledge include microstructure technologies, 3D design and connection technologies.

gy, high-temperature and ultrahigh-frequency applications that are finding use in telecommunications and automation networks, in the automotive industry, or in industrial sensor and actuator applications, RFID and wireless technologies, in addition to packaging and housing made of plastics, aluminum and stainless steel.

HARTING overcomes technological limitations.

Drawing on the comprehensive resources of the group's technology pool, HARTING devises practical solutions for its customers. Whether this involves industrial networks for manufacturing automation, or hybrid interface solutions for wireless telecommunication infrastructures, 3D circuit carriers with microstructures, or cable assemblies for high-temperature applications in the automotive industry – HARTING technologies offer not only components, but comprehensive solutions attuned to individual customer requirements and preferences. The range of cost-effective solutions covers ready-to-use cable configurations, completely assembled backplanes and board system carriers, as well as fully wired and tested control panels.


In order to ensure the future-proof design of RF and EMC-compatible interface solutions, the central HARTING laboratory (certified to EN 45001) employs simulation tools, as well as experimental, testing and diagnostics facilities all the way to scanning electron microscopes. In addition to product and process suitability considerations, lifecycle and environmental aspects play a key role in the selection of materials and processes.

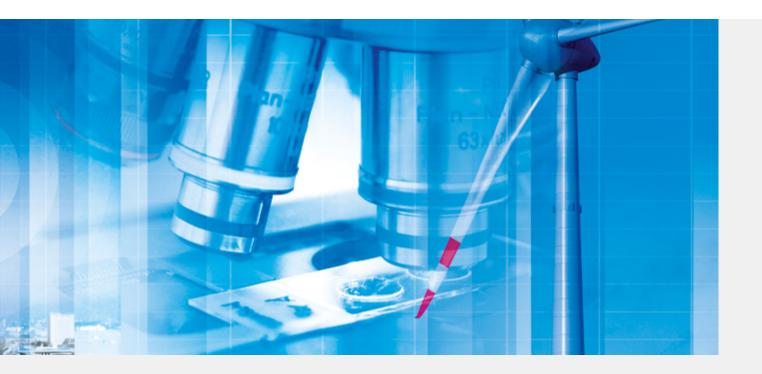

HARTING's knowledge is practical know-how that generates synergy effects.

HARTING commands decades of experience with regard to the applications conditions involved in connections in telecommunications, computer, network and medical technologies, as well as industrial automation technologies, e.g. in the mechanical engineering and plant engineering areas, in addition to the power generation industry and the transportation sector. HARTING is highly

conversant with the specific application areas in all of these technology fields. In every solution approach, the key focus is on the application. In this context, uncompromising, superior quality is our hallmark. Every new solution found invariably flows back into the HARTING technology pool, thereby enriching our resources. And every new solution we go on to create will draw on this wealth of resources in order to optimize each and every individual solution. HARTING is synergy in action.

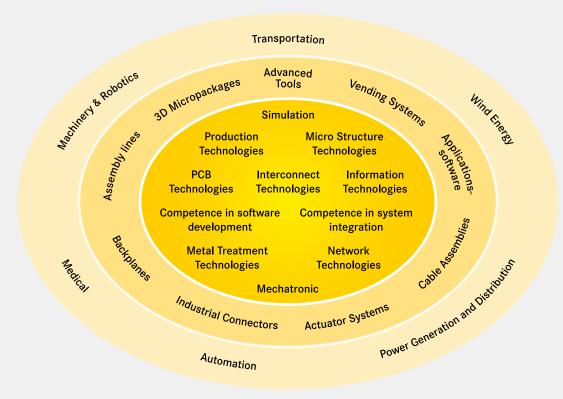

# HARTING eCatalogue





The HARTING eCatalogue / eShop can be found on our homepage at www.HARTING.com or at the direct link www.eCatalogue.HARTING.com.

The HARTING e-Catalogue is your platform for conveniently selecting individual products as well as configuring complete solutions. Our comprehensive product pages provide you with all necessary technical information and CAD files in various formats for downloading. You may also contact our technical sales department directly.

Find out about **product innovations and news** on the start page of the HARTING e-Catalogue or go directly to **www.product-news.HARTING.com**.

Registered users can take advantage of MyHARTING to check on availability or prices, and to place or track their orders. Here, your customized "HARTING history" provides you with a list of your inquiries, quotations and more.

Sign up now for your free e-Catalogue account at HARTING!

www.eShop.HARTING.com




Contents	Page	
PCB connectors	D03 08.2	
Panel feed through	D03 08.15	
Accessories	D03 08.17	
		D
		0
		•

003 08 1



4

Reflow soldering termination (THR) Shielded



### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Degree of protection acc. to IEC IP65 / IP67, when mated

60529


### Technical characteristics

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 1 Nm Lock nut
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

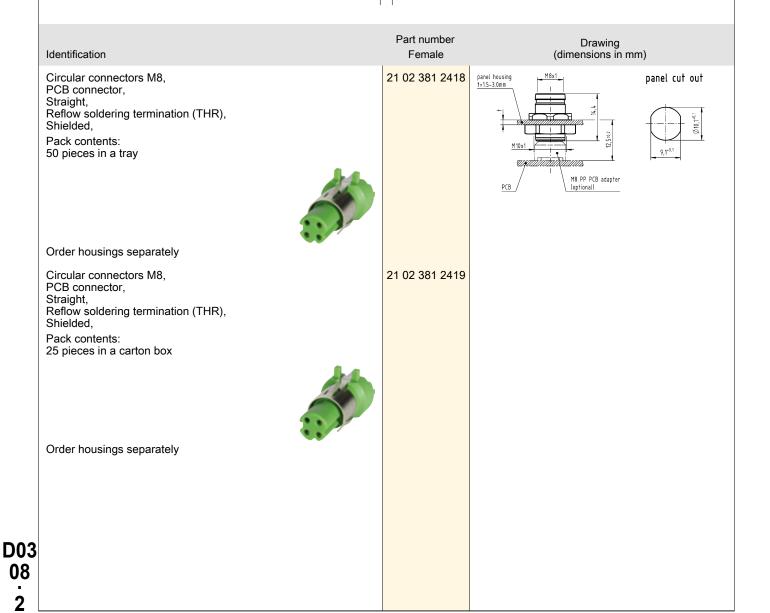

# PCB connectors






Part number Drawing (dimensions in mm) Identification Female 21 02 301 2001 panel housing t=1.5-3.0mm Circular connectors M8, panel cut out Housing, for front mounting, Pack contents: incl. lock nut M8 PP PCB adapter (optional) 21 02 301 2002 Circular connectors M8, Housing, for front mounting, Pack contents: without lock nut 21 01 000 0051 Lock nut, M10 x 1

M8



Reflow soldering termination (THR) Shielded



#### Technical characteristics

Number of contacts Rated current 4 A 60 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ

Degree of protection acc. to IEC IP65 / IP67, when mated

Cat. 5, Class D up to 100 MHz Transmission characteristics

#### Technical characteristics

Tightening torque 1 Nm Lock nut Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-114

#### Identification

Circular connectors M8,

PCB connector, Straight,

for front mounting,

Reflow soldering termination (THR),


Shielded, Pack contents: incl. housing



Part number Female

21 02 381 2431

# Drawing (dimensions in mm)




Panel cut out

Number of contacts

4

Wave soldering termination Shielded



#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \text{ m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Degree of protection acc. to IEC IP67, when mated

30529

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 1 Nm Lock nut

### Technical characteristics

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-114



# Part number Drawing (dimensions in mm) Identification Female Circular connectors M8, 21 42 000 0006 PCB connector. Straight, Wave soldering termination, Shielded PCB layout Order housings separately 21 41 000 0016 Circular connectors M8, Housing, for front mounting, 9 mm Circular connectors M8, 21 41 000 0017 Housing, for front mounting, 13 mm

# PCB connectors

D-coding




M8

Circular connectors M8, hexagonal nut, M10 x 1

Identification

Part number Female

Drawing (dimensions in mm)

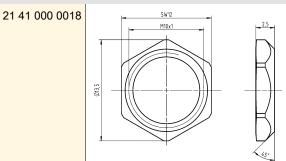




Number of contacts

4

Wave soldering termination Shielded



#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Degree of protection acc. to IEC IP67, when mated

60529


### Technical characteristics

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 1 Nm Lock nut
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

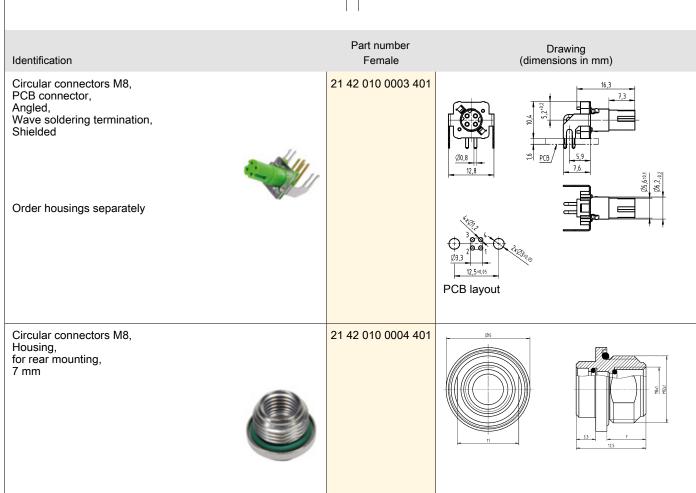

# PCB connectors

M8


D-coding



Part number Drawing (dimensions in mm) Identification Female 21 42 010 0002 401 Circular connectors M8, Housing, for rear mounting, 11 mm 21 42 010 0001 401 Circular connectors M8, hexagonal nut, M12 x 1



Wave soldering termination



#### Technical characteristics

Number of contacts 4 A Rated current Rated voltage 60 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Degree of protection acc. to IEC IP67 60529


#### Technical characteristics

Transmission characteristics Cat. 5, Class D up to 100 MHz 1 Nm Lock nut

Tightening torque Material (contacts) Copper alloy Gold plated Surface (contacts)

RoHS compliant with exemption

# Specifications and approvals

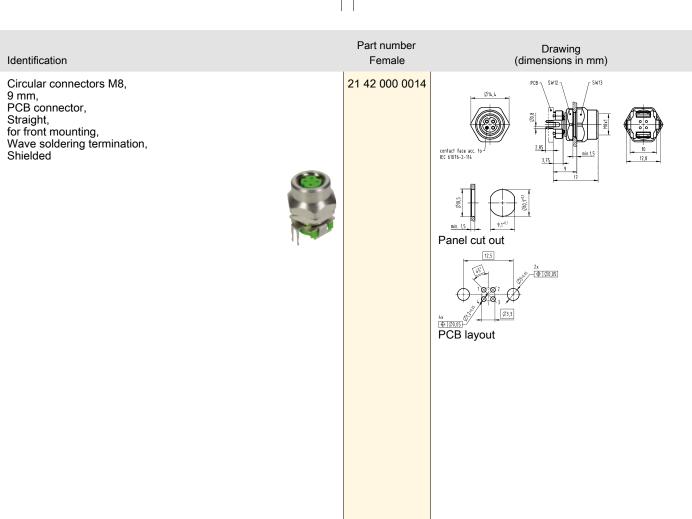




Part number Drawing (dimensions in mm) Identification Female 21 42 000 0005 Circular connectors M8, 13 mm, PCB connector, Straight, for front mounting, Wave soldering termination, Shielded Panel cut out PCB layout 21 42 000 0020 Circular connectors M8, 7 mm, PCB connector,
Angled,
for rear mounting,
Wave soldering termination,
Shielded Panel cut out PCB layout **D03** 




Part number Drawing (dimensions in mm) Identification Female 21 42 000 0019

Circular connectors M8, 11 mm,
PCB connector,
Angled,
for rear mounting,
Wave soldering termination,
Shielded








Panel cut out





4

Reflow soldering termination (THR) Shielded



#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Degree of protection acc. to IEC IP65 / IP67, when mated

60529


### Technical characteristics

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 1 Nm Lock nut
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

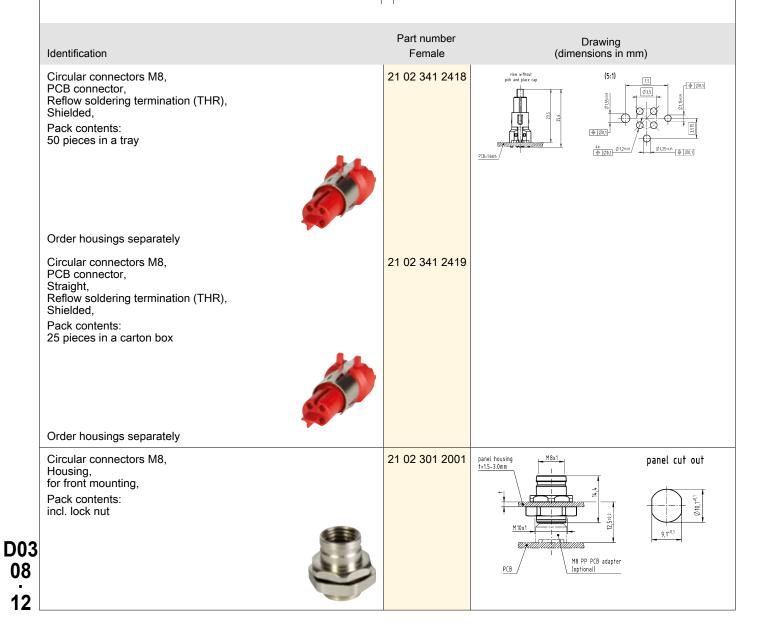

# PCB connectors


P-coding



Identification	Part number Female	Drawing (dimensions in mm)	
Circular connectors M8, Housing, for front mounting, Pack contents: without lock nut	21 02 301 2002		ı
Lock nut, M10 x 1	21 01 000 0051		
			<b>D</b>
			D0 08



Reflow soldering termination (THR) Shielded



### Technical characteristics

Number of contacts 4 A Rated current Rated voltage 60 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ

Degree of protection acc. to IEC IP65 / IP67, when mated

Cat. 5, Class D up to 100 MHz Transmission characteristics

### Technical characteristics

Tightening torque 1 Nm Lock nut Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

Drawing (dimensions in mm)


# Specifications and approvals

Identification	Part number Female
Circular connectors M8, PCB connector, Straight, for front mounting, Reflow soldering termination (THR), Shielded, Pack contents: incl. housing	21 02 341 2431

80

Number of contacts

Unshielded



# Technical characteristics

Number of contacts Rated current 3 A 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles Locking type Screw locking

Conductor length 50 cm

IP67 Degree of protection acc. to IEC

60529

0.25 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 24 Tightening torque 0.8 Nm Lock nut

#### Technical characteristics

Material (insert) Thermoplastic polyurethane

(TPU)

Material (hood/housing) Copper-zinc alloy

Material (contacts) Brass Surface (contacts) Gold plated


RoHS compliant with exemption,

compliant

# Specifications and approvals

IEC 61076-2-104

 $\epsilon$ 

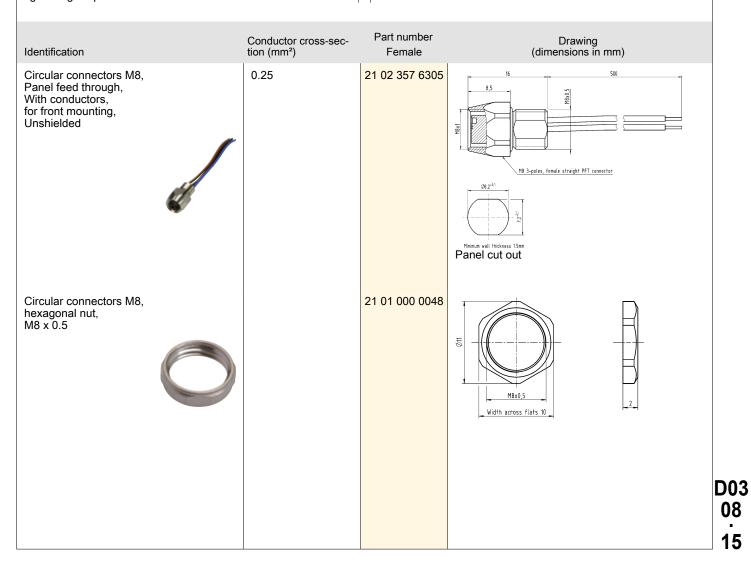


10

Number of contacts

4

Unshielded



### Technical characteristics

Locking type Screw locking Conductor length 50 cm

Degree of protection acc. to IEC IP67

60529

Conductor cross-section 0.25 mm²
Conductor cross-section AWG 24

Tightening torque 0.8 Nm Lock nut

### Technical characteristics

Material (insert) Thermoplastic polyurethane

(TPU)

Material (hood/housing) Copper-zinc alloy

Material (contacts)

Surface (contacts)

Brass


Gold plated

RoHS compliant with exemption,

compliant

# Specifications and approvals



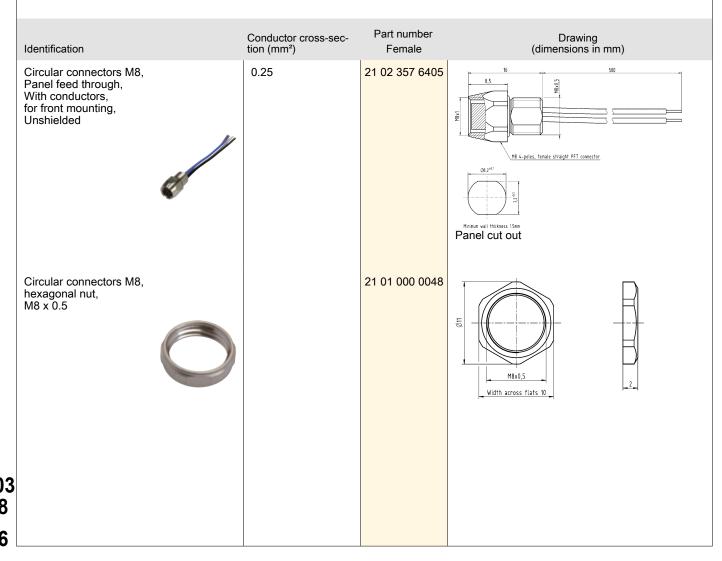


# Technical characteristics

Material (accessories)

Thermoplastic

# Technical characteristics

Colour (accessories) RoHS Black compliant

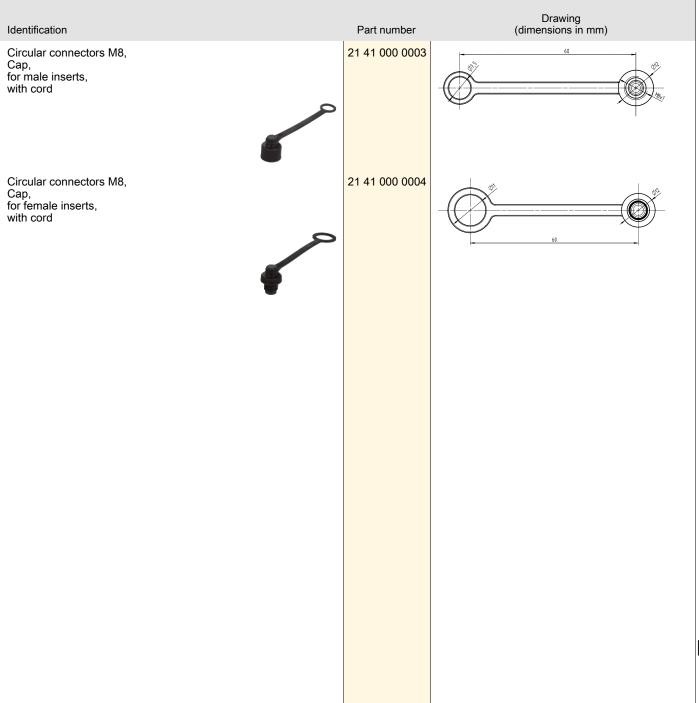



Contents	Page
PCB connectors	D03 12.2
PCB connectors with transformer	D03 12.71
Panel feed through	D03 12.83
Accessories	D03 12.100

D03 12 . 1

### **PCB** connectors


A-coding



Number of contacts

M12

Reflow soldering termination (THR) Shielded

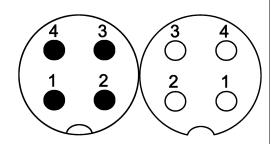

#### Technical characteristics

Number of contacts Rated current 4 A 250 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree Insulation resistance >10<sup>8</sup> Ω Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut

#### Technical characteristics

Material (insert) Liquid crystal polymer (LCP) Copper alloy

Material (contacts) Surface (contacts) Gold plated

RoHS compliant with exemption,

compliant

# Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

Part number Drawing (dimensions in mm) Identification Female 21 03 321 1418 21 03 321 2418 Circular connectors M12,


PCB adapter, Straight,


Reflow soldering termination (THR), Shielded,

Pack contents: 60 pieces in a tray




Order housings separately





3

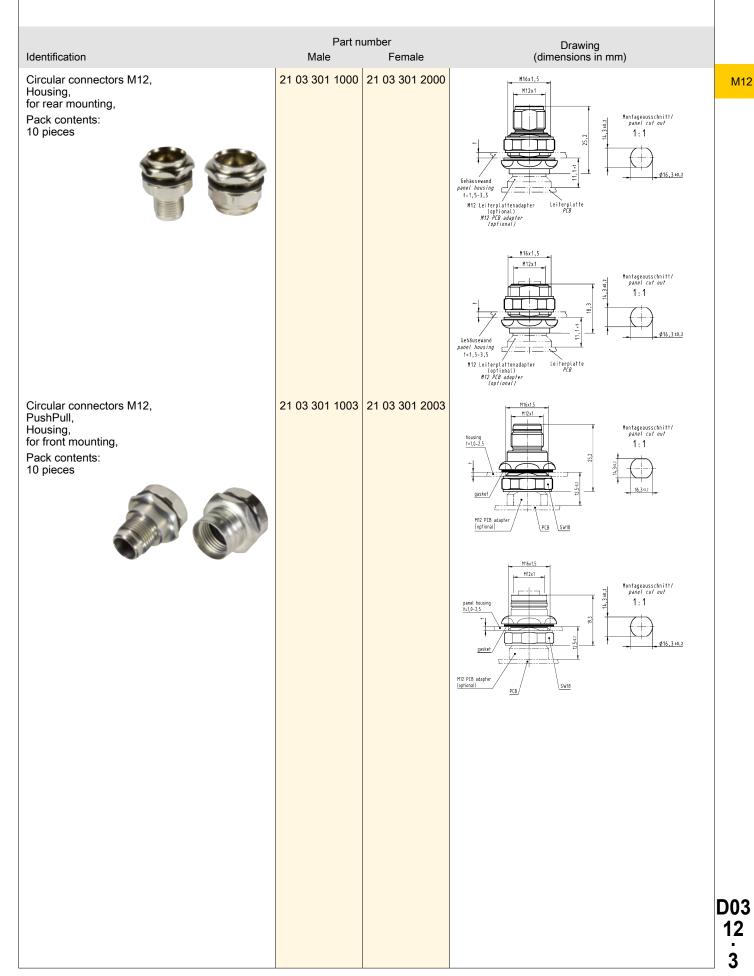




4

M12

Reflow soldering termination (THR) Shielded

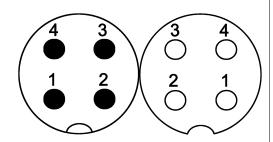

### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 250 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut

#### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)
Material (hood/housing) Zinc die-cast

Material (contacts)

Surface (contacts)

Gold plated


RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101

UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

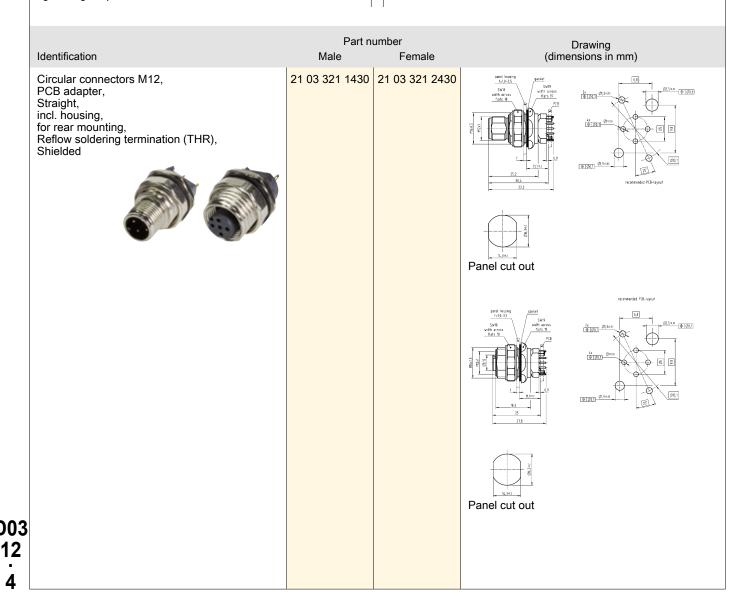



Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 21 03 321 1431 21 03 321 2431 **⊕** Ø0,1 Ø1,9-0.0 Panel cut out Panel cut out

M12

### **PCB** connectors


A-coding



Number of contacts

4

Reflow soldering termination (THR) Shielded

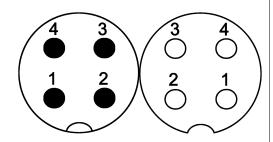

# Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 250 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking
Degree of protection acc. to IEC IP20, IP67, when mated


60529

#### Technical characteristics

Tightening torque 2 Nm Lock nut
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

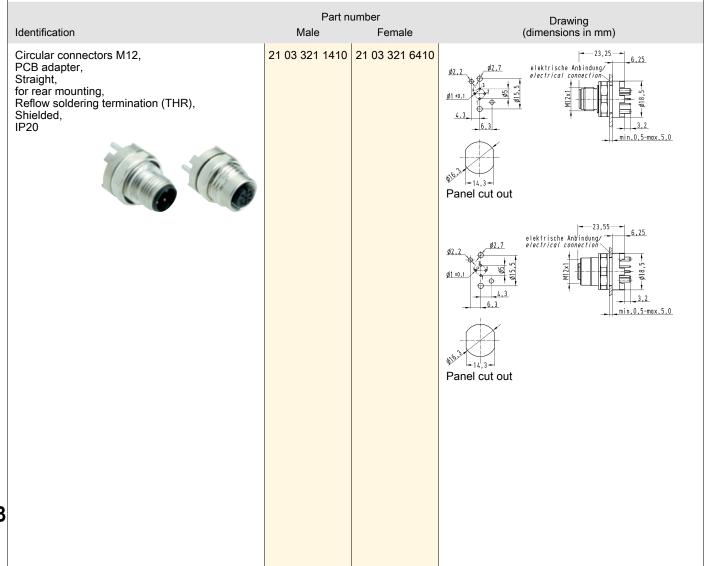



Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP67 21 03 321 1420 21 03 321 6420 elektrische Anbindung electrical connection -14,3-Panel cut out 23,55 Panel cut out


M12



4

M12

Reflow soldering termination (SMT) Unshielded

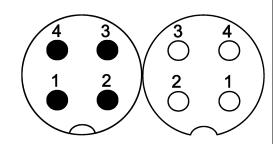

#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 250 \text{ V} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \Omega \\ \text{Contact resistance} & \leq 10 \text{ m}\Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking
Degree of protection acc. to IEC IP67, when mated

60529

### Technical characteristics


Tightening torque 1 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

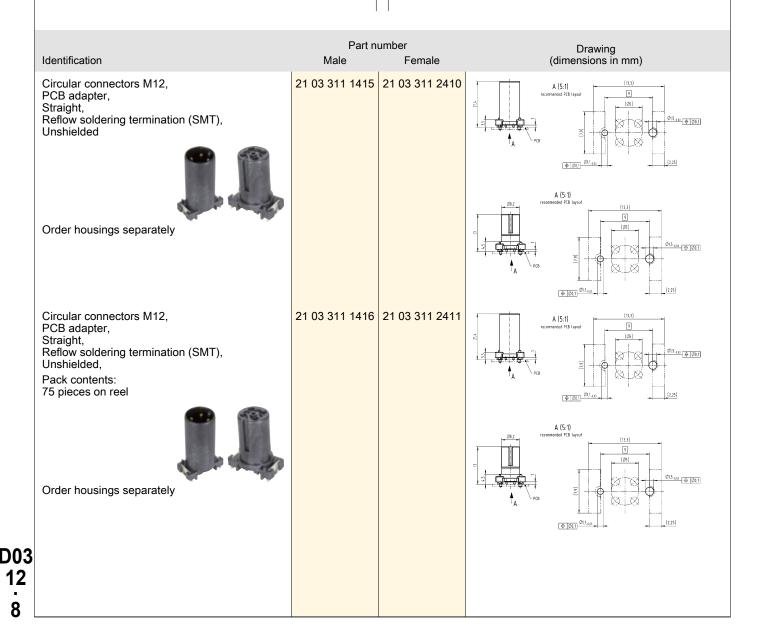

Drawing (dimensions in mm)



21 41 000 0012 21 41 000 0010 M12

Female

Part number

Male

Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm

Identification




If necessary, order lock nut 21 41 000 0011 separately.

Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm



If necessary, order lock nut 21 41 000 0011 separately.

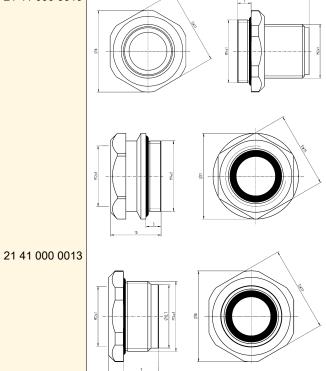

D03 9

12


### **PCB** connectors

### A-coding



Number of contacts

Wave soldering termination Shielded

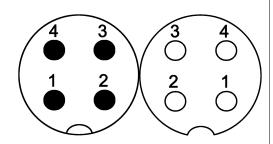

#### Technical characteristics

Number of contacts Rated current 4 A 250 V Rated voltage Pollution degree >10<sup>8</sup> Ω Insulation resistance Mating cycles ≥100

Locking type Screw locking Degree of protection acc. to IEC IP67, when screwed 60529


1 Nm Lock nut Tightening torque

### Technical characteristics

Material (insert) Polyamide (PA) Material (hood/housing) Copper-zinc alloy Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption


### Specifications and approvals

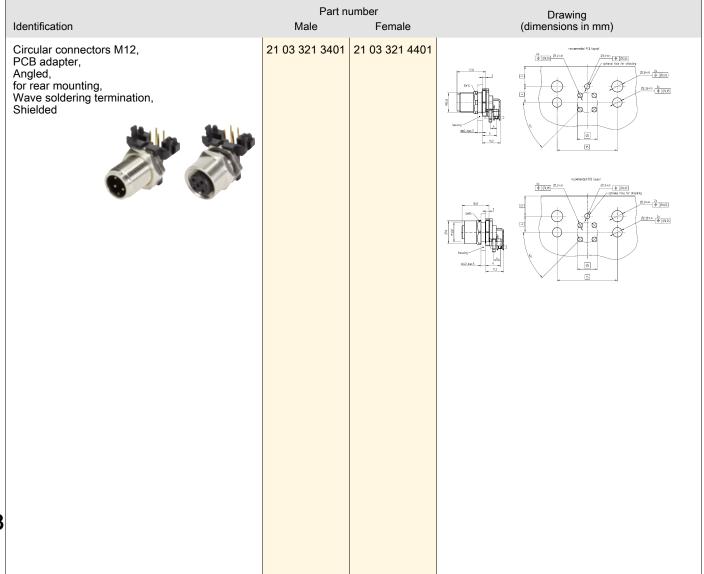



5

Reflow soldering termination (THR)

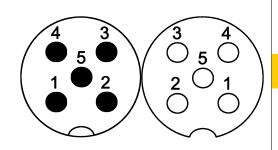

#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 5 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \text{ m} \Omega \\ \text{Mating cycles} & \geq 100 \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut

#### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)

Material (contacts)

Copper alloy
Surface (contacts)

Gold plated

RoHS compliant with exemption,

compliant

# Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079


# Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, 21 03 321 1518 21 03 321 2518 PCB adapter, Straight, \$1,3+0,65 **4** \$0,2 A B Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray ⊕ | \$0,2 | A | B Order housings separately



Part number Drawing (dimensions in mm) Identification Male Female 21 03 301 1000 21 03 301 2000 Circular connectors M12, M16x1,5 Housing, M12x1 for rear mounting, Montageausschnitt/ panel cut out Pack contents: 10 pieces 1:1 Gehäusewand
panel housing
t=1,5-3,5 M12 Leiterplattenadapter (optional) M12 PCB adapter (optional) M16x1,5 Montageausschnitt/ panel cut out 1:1 M12 Leiterplattenadapter (optional) M12 PCB adapter (optional) 21 03 301 1003 21 03 301 2003 Circular connectors M12, PushPull, Housing, for front mounting, Montageausschnitt/ panel cut out 1:1 Pack contents: 10 pieces PCB M12x1 1:1 panel housing t=1,0-2,5 **D03** 

5

Reflow soldering termination (THR)

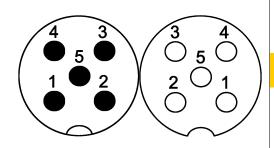

### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 5 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \text{ m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut

### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)

Material (hood/housing)

Material (contacts)

Surface (contacts)

Zinc die-cast
Copper alloy
Gold plated


RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101

UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

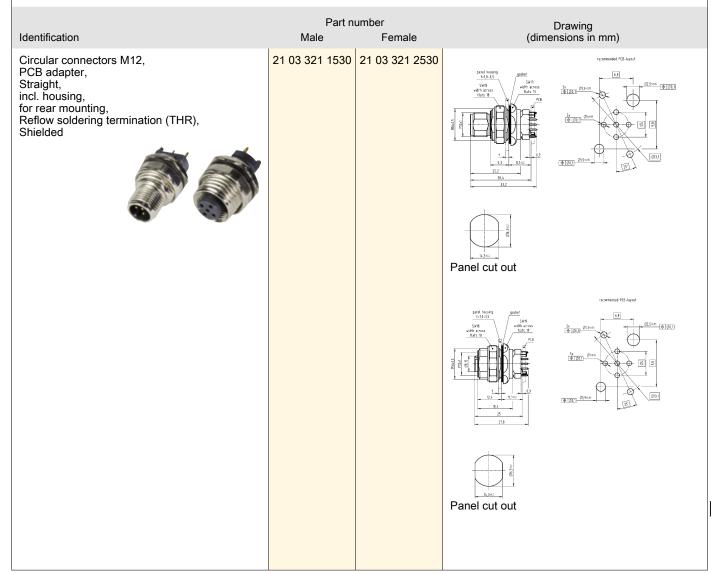






Part number Drawing (dimensions in mm) Male Identification Female Circular connectors M12, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 21 03 321 1531 21 03 321 2531 M12 Panel cut out Panel cut out



5

Reflow soldering termination (THR)

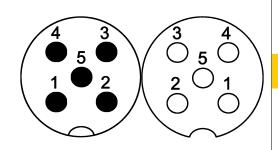

### Technical characteristics

Number of contacts Rated current 4 A 60 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles Locking type Screw locking

Degree of protection acc. to IEC IP20, IP67, when mated

60529


### Technical characteristics

Tightening torque 2 Nm Lock nut
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101

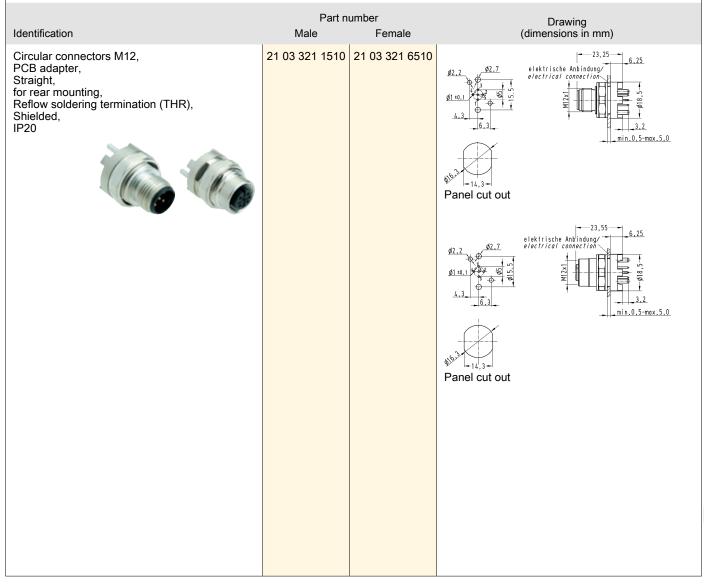

M12






Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP67 21 03 321 1520 21 03 321 6520 Panel cut out Panel cut out **D03** 

M12

Number of contacts

Reflow soldering termination (SMT) Unshielded

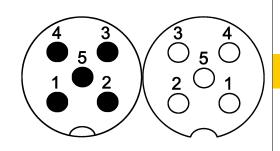

### Technical characteristics

Number of contacts 4 A Rated current 60 V Rated voltage Pollution degree Insulation resistance >10<sup>8</sup> Ω Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type

Screw locking Degree of protection acc. to IEC IP67, when mated

### Technical characteristics

Tightening torque 1 Nm Lock nut


Material (insert) Liquid crystal polymer (LCP)

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101

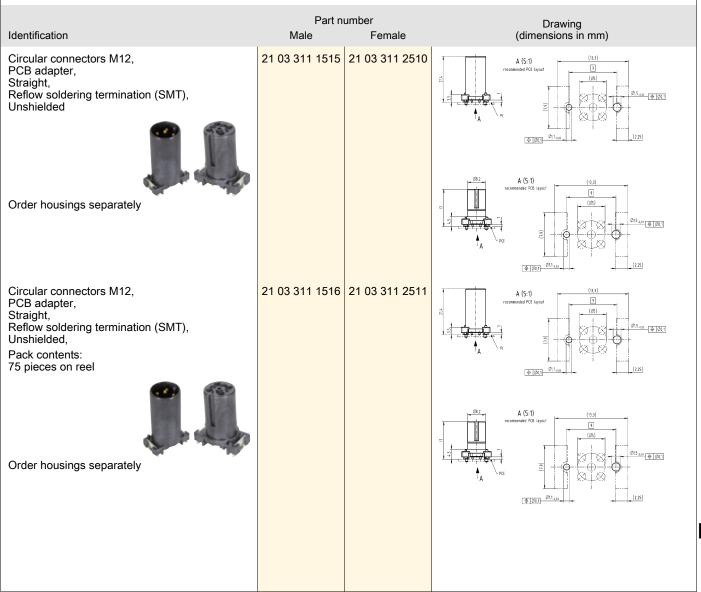






M12

Part number Drawing (dimensions in mm) Identification Male Female 21 41 000 0012 21 41 000 0010 Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm If necessary, order lock nut 21 41 000 0011 separately. 21 41 000 0013 Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm If necessary, order lock nut 21 41 000 0011 separately.

M12

Number of contacts

Wave soldering termination

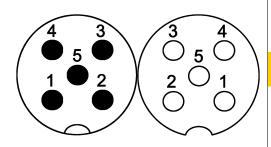

### Technical characteristics

Number of contacts 4 A Rated current Rated voltage 60 V Pollution degree >10<sup>8</sup> Ω Insulation resistance ≥100 Mating cycles Locking type Screw locking

Degree of protection acc. to IEC IP67, when mated 60529

Tightening torque 1 Nm Lock nut


### Technical characteristics

Material (insert) Polyamide (PA) Material (hood/housing) Copper-zinc alloy Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101

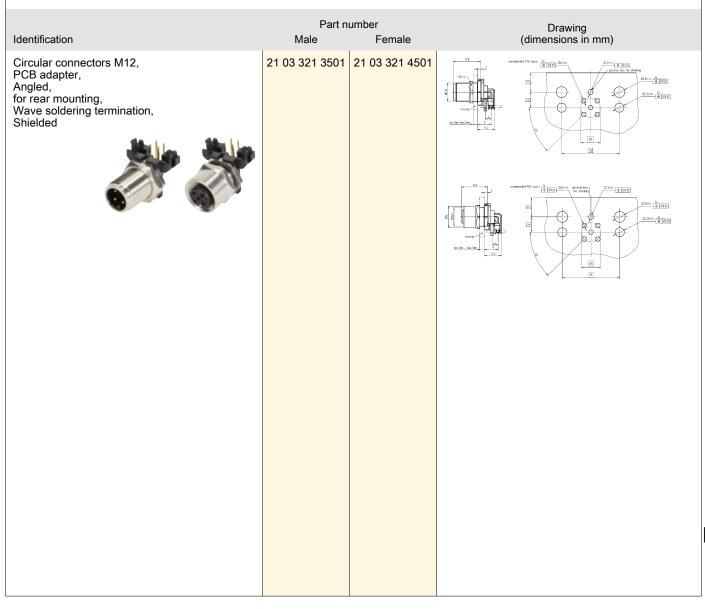




8

M12

Reflow soldering termination (THR) Shielded

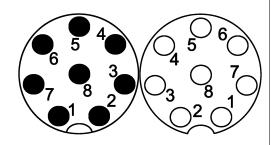

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 8 \\ \text{Rated current} & 2 \text{ A} \\ \text{Rated voltage} & 30 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut

### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)

Material (contacts)

Copper alloy
Surface (contacts)

Gold plated

RoHS compliant with exemption,

compliant

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079



Part number Drawing (dimensions in mm) Identification Male Female 21 03 301 1000 21 03 301 2000 Circular connectors M12, M16x1,5 Housing, M12x1 for rear mounting, Montageausschnitt/ panel cut out Pack contents: 10 pieces 1:1 Gehäusewand panel housing t=1,5-3,5 M12 Leiterplattenadapter (optional) M12 PCB adapter (optional) Leiterplatte *PCB* M16x1,5 Montageausschnitt/ panel cut out 1:1 M12 Leiterplattenadapter (optional) M12 PCB adapter (optional) Circular connectors M12, 21 03 301 1003 21 03 301 2003 PushPull, Housing, for front mounting, Montageausschnitt/ panel cut out 1:1 Pack contents: 10 pieces PCB M12x1 1:1


M12



8

M12

Reflow soldering termination (THR) Shielded

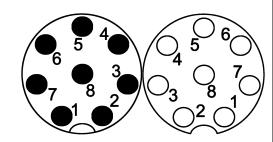

### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 8 \\ \text{Rated current} & 2 \text{ A} \\ \text{Rated voltage} & 30 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut

### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)
Material (hood/housing) Zinc die-cast

Material (hood/housing)

Material (contacts)

Surface (contacts)

Zinc die-cast
Copper alloy
Gold plated


RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101

UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

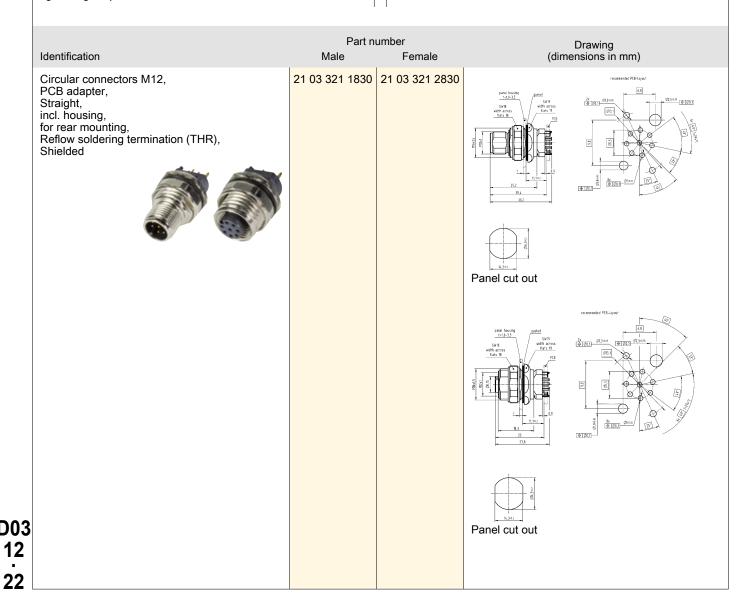




Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 21 03 321 1831 21 03 321 2831 Panel cut out Panel cut out

M12



M12

Reflow soldering termination (SMT) Unshielded

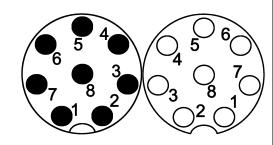

### Technical characteristics

Number of contacts 2 A Rated current Rated voltage 30 V Pollution degree >10<sup>8</sup> Ω Insulation resistance ≤10 mΩ Contact resistance Mating cycles ≥100

Locking type Screw locking Degree of protection acc. to IEC IP67, when mated 60529

## Technical characteristics

Tightening torque 1 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101

Identification	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Unshielded	21 03 311 1815	21 03 311 2810	(9,3)  A (5.1)  Tecanisaded P(B layest   (65.5)  (95.5)  (95.5)  (95.5)  (95.5)  (95.5)  (95.5)  (95.5)  (95.5)
Order housings separately			(9.3)  A (5:1)  recommended P(8 layout  (9.5)
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (SMT), Unshielded, Pack contents: 75 pieces on reel	21 03 311 1816	21 03 311 2811	A (5.1) [2]  recenteneded P(8 layer) (05.5) (05.5)  (95.5) (05.5) (05.5) (05.5) (05.5)
Order housings separately			A (5:f)  reconnected PCB layout  (10.3.)  (10.3.)  (10.5.5)  (10.5.6.3)  (10.5.6.3)  (10.5.6.3)  (10.5.6.3)  (10.5.6.3)  (10.5.6.3)  (10.5.6.3)  (10.5.6.3)



Part number Drawing (dimensions in mm) Identification Male Female 21 41 000 0012 21 41 000 0010 Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm If necessary, order lock nut 21 41 000 0011 separately. Circular connectors M12, 21 41 000 0013 Housing, for front mounting, M14 x 1, 13 mm If necessary, order lock nut 21 41 000 0011 separately.

M12

D03


25



8

M12

Reflow soldering termination (SMT) Shielded

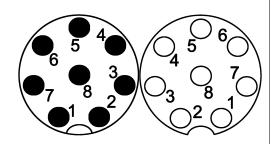

#### Technical characteristics

 Number of contacts
 8

 Rated current
 2 A

 Rated voltage
 30 V

 Pollution degree
 3

 Insulation resistance
 >108 Ω

 Contact resistance
 ≤10 mΩ

 Mating cycles
 ≥100

Locking type Screw locking
Degree of protection acc. to IEC IP67, when mated

30529

### Technical characteristics

Tightening torque 1 Nm Lock nut


Material (insert) Liquid crystal polymer (LCP)
Material (contacts) Copper alloy

Surface (contacts) Copper alloy Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101

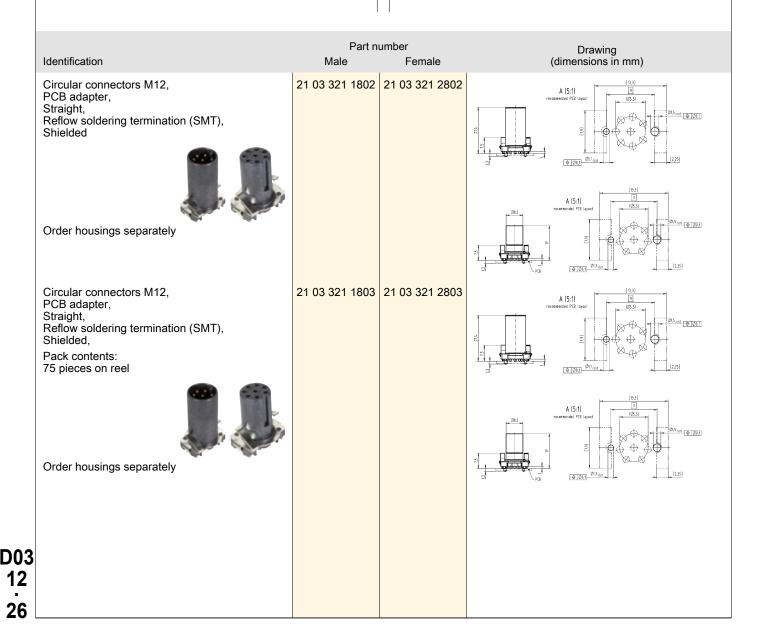

Identification

Drawing (dimensions in mm)



21 41 000 0012 21 41 000 0010 Circular connectors M12, Housing, for front mounting, M14 x 1, 9 mm If necessary, order lock nut 21 41 000 0011 separately. Circular connectors M12, 21 41 000 0013 Housing, for front mounting, M14 x 1, 13 mm If necessary, order lock nut 21 41 000 0011 separately.

Part number

Female

Male

M12

**B-coding** 




Number of contacts

5

M12

Reflow soldering termination (THR) Shielded

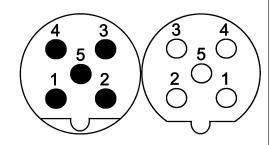

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 5 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 50 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut

### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)

Material (contacts)

Copper alloy
Surface (contacts)

Gold plated


RoHS compliant with exemption,

compliant

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

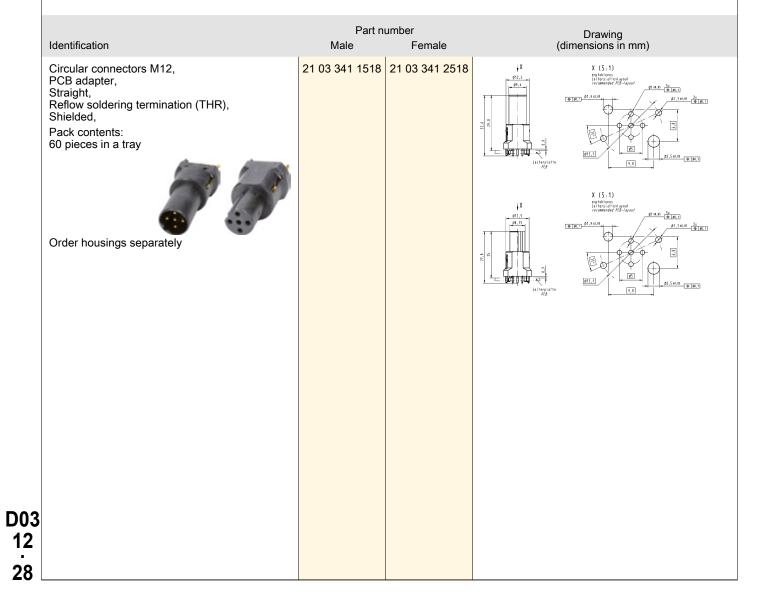

Circular connectors M12,

Identification

Drawing (dimensions in mm)

M16x1,5



M12

Housing, M12x1 for rear mounting, Montageausschnitt/ panel cut out Pack contents: 10 pieces 1:1 Gehäusewand panel housing t=1,5-3,5 M12 Leiterplattenadapter (optional) M12 PCB adapter (optional) Leiterplatte *PCB* M16x1,5 Montageausschnitt/ panel cut out 1:1 M12 Leiterplattenadapter (optional) M12 PCB adapter (optional) Circular connectors M12, 21 03 301 1003 21 03 301 2003 PushPull, Housing, for front mounting, Montageausschnitt/ panel cut out 1:1 Pack contents: 10 pieces PCB M12x1 1:1

Part number

21 03 301 1000 21 03 301 2000

Female

Male

D03 12

29

**B-coding** 




Number of contacts

5

M12

Reflow soldering termination (THR) Shielded

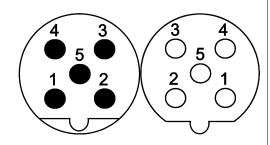

### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 5 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 50 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut

### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)
Material (hood/housing) Zinc die-cast

Material (hood/housing)

Material (contacts)

Surface (contacts)

Zinc die-cast
Copper alloy
Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

Identification

Part number
Male
Female
(dimensions in mm)

Circular connectors M12,
PCB adapter,
Straight,
incl. housing,
Reflow soldering termination (THR),
Shielded

Panel cut out

Panel cut out

Panel cut out

Panel cut out




Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 21 03 341 1531 21 03 341 2531 Panel cut out Panel cut out

M12



M12

Reflow soldering termination (THR)

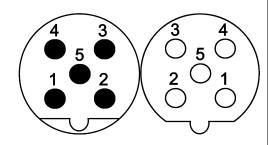

## Technical characteristics

Number of contacts Rated current 4 A 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles Locking type Screw locking

Degree of protection acc. to IEC IP67, when mated

60529


### Technical characteristics

Tightening torque 2 Nm Lock nut Material (insert) Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Gold plated Surface (contacts)

RoHS compliant with exemption

## Specifications and approvals


IEC 61076-2-101

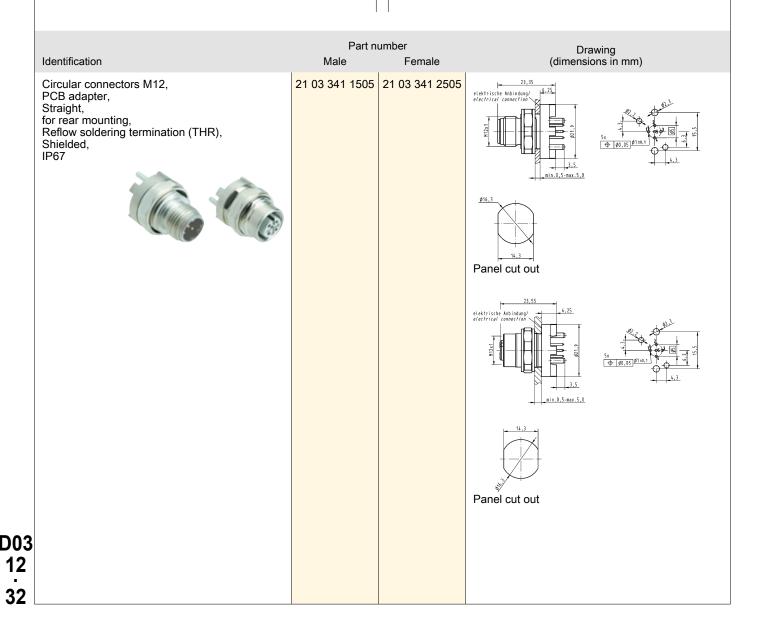

M12

Number of contacts

Reflow soldering termination (THR)



### Technical characteristics

Number of contacts 4 A Rated current 50 V Rated voltage Rated impulse voltage 2.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated 60529

Transmission characteristics

Cat. 5, Class D up to 100 MHz

Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

### Technical characteristics

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption,

compliant

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079

99999 

## Part number Drawing (dimensions in mm) Identification Female Male Circular connectors M12, 21 03 381 1418 21 03 381 2418 PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray Order housings separately

M12




Part number Drawing (dimensions in mm) Identification Male Female 21 03 301 1000 21 03 301 2000 Circular connectors M12, M16x1,5 Housing, M12x1 for rear mounting, Montageausschnitt/ panel cut out Pack contents: 10 pieces 1:1 Gehäusewand
panel housing
t=1,5-3,5 M12 Leiterplattenadapter (optional) M12 PCB adapter (optional) M16x1,5 Montageausschnitt/ panel cut out 1:1 M12 Leiterplattenadapter (optional) M12 PCB adapter (optional) 21 03 301 1003 21 03 301 2003 Circular connectors M12, PushPull, Housing, for front mounting, Montageausschnitt/ panel cut out 1:1 Pack contents: 10 pieces PCB M12x1 1:1 panel housing t=1,0-2,5 **D03** 



4

Reflow soldering termination (THR) Shielded

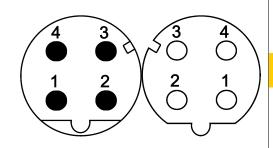

### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 50 \text{ V} \\ \text{Rated impulse voltage} & 2.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \text{ m} \Omega \\ \text{Mating cycles} & \geq 100 \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated 60529

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 2 Nm Lock nut

## Technical characteristics

Material (insert) Liquid crystal polymer (LCP)

Material (hood/housing)

Material (contacts)

Surface (contacts)

Zinc die-cast
Copper alloy
Surface (contacts)

Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

	·	•	
Identification	Part number Drawing Male Female (dimensions in mm		Drawing (dimensions in mm)
Circular connectors M12, PCB adapter, Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded	21 03 381 1430	21 03 381 2430	Panel cut out   Panel   Pane
			Parel   Trapport   Parel   Trapport   Parel   Parel
			Panel cut out

M12






Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, PushPull, PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded 21 03 381 1431 21 03 381 2431 Panel cut out Panel cut out



4

Reflow soldering termination (THR) Shielded

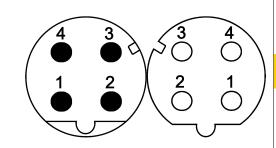

### Technical characteristics

 Number of contacts
 4

 Rated current
 4 A

 Rated voltage
 50 V

 Rated impulse voltage
 2.5 kV

 Pollution degree
 3

 Insulation resistance
 >108 Ω

 Contact resistance
 ≤10 mΩ

 Mating cycles
 ≥100

 Locking type
 Second lock

Locking type Screw locking

Degree of protection acc. to IEC IP67, when mated, IP20

60529

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 2 Nm Lock nut Material (insert) Polyamide (PA)

### Technical characteristics

Material (hood/housing)Zinc die-castMaterial (contacts)Copper alloySurface (contacts)Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E235076

CSA-C22.2 No. 182.3 ECBT8.E235076



## Part number Drawing Identification Male Female (dimensions in mm) 21 03 371 1400 21 03 371 2415 PCB layout Circular connectors M12, (5:1) PCB adapter, Straight, 4x ⊕ Ø0.05 for rear mounting, Reflow soldering termination (THR), Shielded, IP67 Panel cut out min.2,0-max.519,3 Panel cut out






	Identification	Part no Male	umber Female	Drawi (dimension:	ng s in mm)
M12	Circular connectors M12, With fixing hole, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP20		21 03 381 6410	elektrische Anbindung	
	Circular connectors M12, With fixing hole, PCB adapter, Straight, for rear mounting, Reflow soldering termination (THR), Shielded, IP67		21 03 381 6420	23,55 electrical connection  The property of t	Ø1:0.1 6.3
				Panel cut out	
D03 12  38					

M12

Number of contacts

Reflow soldering termination (THR)



### Technical characteristics

Number of contacts Rated current 4 A Rated voltage 50 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking

Degree of protection acc. to IEC IP20, IP67, when mated

60529

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

### Technical characteristics

Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E235076

CSA-C22.2 No. 182.3 ECBT8.E235076



Part number

Female

#### Identification

Circular connectors M12,

PCB adapter, Angled,

for rear mounting,

Reflow soldering termination (THR),

Shielded,

IP20



Coding bottom left = Cable entry direction on the angled connector: to the right

Circular connectors M12,

PCB adapter, Angled,

for rear mounting,

Reflow soldering termination (THR),


Shielded,

IP20



Coding top left = Cable entry direction on the angled connector: downwards


21 03 381 4410



Drawing

(dimensions in mm)

Panel cut out

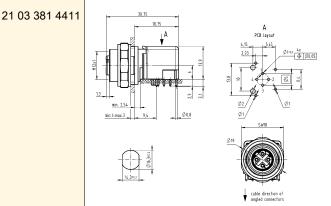

Panel cut out

**D03** 

39



M12

Part number Drawing (dimensions in mm) Identification Female Circular connectors M12, 21 03 381 4412 With fixing hole, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP20 Coding bottom left = Cable entry direction on the angled connector: to the right Panel cut out Circular connectors M12, 21 03 381 4413 With fixing hole, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP20 Coding top left = Cable entry direction on the angled connector: downwards Panel cut out Circular connectors M12, PCB adapter, 21 03 381 4430 Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP67 Coding bottom left = Cable entry direction on the angled connector: to the right Panel cut out

Circular connectors M12, With fixing hole, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP67




M12

Part number Female

21 03 381 4432

Drawing (dimensions in mm)



Panel cut out

Identification

Coding bottom left = Cable entry direction on the angled connector: to the right

D03 12


### **D-coding**



Number of contacts

M12

Reflow soldering termination (THR) Shielded



#### Technical characteristics

Number of contacts Rated current 4 A Rated voltage 250 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP20, IP67, when mated

60529

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 2 Nm Lock nut

#### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)

Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101



#### Identification Circular connectors M12,

PushPull, PCB adapter, Angled, for rear mounting,

Reflow soldering termination (THR),


Shielded, IP20



Part number

21 03 381 4434







Panel cut out

Circular connectors M12,

PushPull, With fixing hole, PCB adapter, Angled,


for rear mounting,


Reflow soldering termination (THR),

Shielded, IP20



21 03 381 4435







Panel cut out



Part number Drawing (dimensions in mm) Identification Female Circular connectors M12, PushPull, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, 21 03 381 4436 IP67 Panel cut out Circular connectors M12, PushPull, With fixing hole, PCB adapter, Angled, for rear mounting, Reflow soldering termination (THR), Shielded, IP67 21 03 381 4437 IP67 Panel cut out


M12



4

M12

Reflow soldering termination (SMT) Shielded



#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 250 \text{ V} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Mating cycles} & \geq 100 \\ \text{Locking type} & \text{Screw locking} \\ \end{array}$ 

Degree of protection acc. to IEC IP67, when mated

60529

Transmission characteristics Cat. 5, Class D up to 100 MHz

If necessary, order lock nut 21 41 000 0011 separately.

#### Technical characteristics

Tightening torque 1 Nm Lock nut


Material (insert) Liquid crystal polymer (LCP)

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101

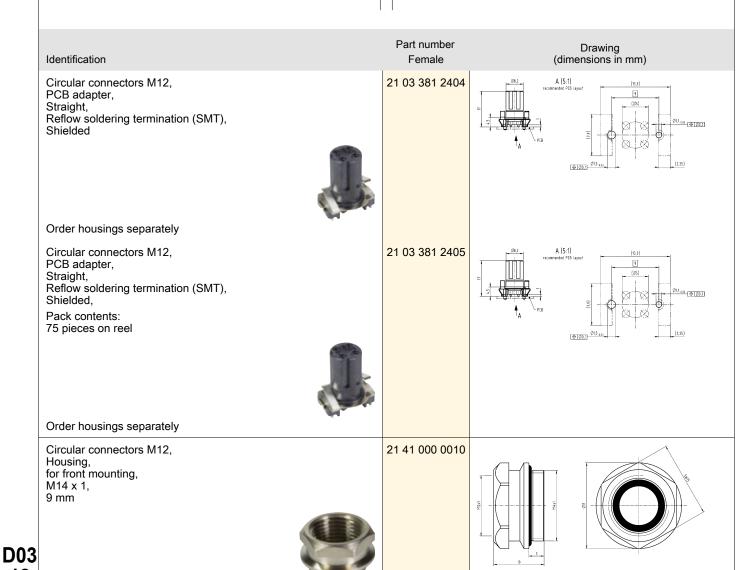



M12

Part number Drawing (dimensions in mm)


Circular connectors M12,

Part number Drawing (dimensions in mm)

Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm



If necessary, order lock nut 21 41 000 0011 separately.




### **D-coding**



Number of contacts

M12

Wave soldering termination Shielded



### Technical characteristics

Number of contacts Rated current 4 A 250 V Rated voltage Pollution degree >10<sup>8</sup> Ω Insulation resistance Mating cycles ≥100 Locking type Screw locking

Degree of protection acc. to IEC IP67, when mated

Transmission characteristics

Tightening torque

Cat. 5, Class D up to 100 MHz

1 Nm Lock nut

### Technical characteristics

Material (insert) Polyamide (PA) Material (hood/housing) Copper-zinc alloy Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

IEC 61076-2-101

#### Identification

Circular connectors M12, PCB adapter, Angled,

for rear mounting,


Wave soldering termination, Shielded



Part number Female

21 03 381 4440


#### Drawing (dimensions in mm)







Reflow soldering termination (THR)



### Technical characteristics

Number of contacts 8 Rated current 0.5 A Rated voltage 50 V Rated impulse voltage 0.8 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Screw locking, PushPull Locking type Degree of protection acc. to IEC IP65 / IP67, when mated 60529

Transmission characteristics

Cat.  $6_A$ , Class  $E_A$  up to 500 MHz, Cat. 5, Class D up to 100 MHz

Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

### Technical characteristics

Material (contacts) Copper alloy Surface (contacts) Gold plated

compliant with exemption, compliant RoHS

## Specifications and approvals

IEC 61076-2-109 UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079



Identification		Part number Female	Drawing (dimensions in mm)
Circular connectors M12, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray  Order housings separately	Cat. 5 Cat. 6 <sub>A</sub>	21 03 381 2807 21 03 381 2806	TOTAL PROPERTY OF THE PROPERTY
Circular connectors M12, PCB adapter, Angled, Reflow soldering termination (THR), Shielded, Pack contents: 30 pieces in a tray  Order housings separately	Cat. 6 <sub>A</sub>	21 03 381 4806	Technological Co. Jupid  Technological Co. Jup






Part number Drawing (dimensions in mm) Identification Female 21 03 301 2000 Circular connectors M12, M16x1,5 M12 Housing, for rear mounting, Montageausschnitt/ panel cut out Pack contents: 10 pieces 1:1 Gehäusevand
panel housing
t=1,5-3,5
M12 Leiterplattenodapter
(optional)
M12 PCB adapter
(optional) Circular connectors M12, PushPull, 21 03 301 2003 M16x1,5 M12x1 Montageausschnitt/
panel cut out
1:1 Housing, for front mounting, panel hou t=1,0-2,5 Pack contents: 10 pieces **D03** 



Reflow soldering termination (THR)



## Technical characteristics

Number of contacts Rated current 0.5 A Rated voltage 50 V Rated impulse voltage 0.8 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated 60529

Transmission characteristics

Cat.  $6_A$ , Class  $E_A$  up to 500 MHz, Cat. 5, Class D up to 100 MHz

2 Nm Lock nut

Tightening torque Material (insert) Liquid crystal polymer (LCP)

### Technical characteristics

Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-109 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079



## Part number Drawing Identification Female (dimensions in mm) 21 03 381 2803 21 03 381 2802 Circular connectors M12, Cat. 5 PushPull, Cat. 6<sub>A</sub> PCB adapter, Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded. Pack contents: 60 pieces in a tray Panel cut out Panel cut out

**50** 



Part number Drawing (dimensions in mm) Identification Female 21 03 381 2814 21 03 381 2813 Circular connectors M12, Cat. 5 PushPull, PCB adapter, Cat. 6<sub>A</sub> Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded Panel cut out Panel cut out 21 03 381 2809 21 03 381 2810 Circular connectors M12, PCB adapter, Cat. 5 **♦ 1,1**5 Cat. 6<sub>A</sub> Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), 8x + 1,15 Shielded, Pack contents: 60 pieces in a tray **D03** 



D03

51

Part number Drawing (dimensions in mm) Identification Female 21 03 381 2812 21 03 381 2811 Circular connectors M12, PCB adapter, Cat. 5 Cat. 6<sub>A</sub> Straight, incl. housing, for rear mounting, Reflow soldering termination (THR), Shielded Panel cut out Panel cut out 21 03 381 2805 21 03 381 2804 Circular connectors M12, Cat. 5 Circular connectors M12,
Long version,
PCB adapter,
Straight,
incl. housing,
for rear mounting,
Reflow soldering termination (THR), Cat. 6<sub>A</sub> 8x ⊕ 0,05 Shielded, Pack contents: 60 pieces in a tray

X-coding




Number of contacts

8

M12

Reflow soldering termination (THR) Shielded



## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 8 \\ \text{Rated current} & 0.5 \text{ A} \\ \text{Rated voltage} & 50 \text{ V} \\ \text{Rated impulse voltage} & 0.8 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Transmission characteristics Cat. 6<sub>A</sub>, Class E<sub>A</sub> up to 500 MHz

Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

## Technical characteristics

Material (hood/housing)

Material (contacts)

Surface (contacts)

Zinc die-cast
Copper alloy
Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-109 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079



#### Identification

Circular connectors M12,

PushPull, PCB adapter, Angled, incl. housing, for front mounting,

Reflow soldering termination (THR),


Shielded, Pack contents: 30 pieces in a tray




#### Part number Female

21 03 381 4802

# Drawing (dimensions in mm)








Panel cut out



12

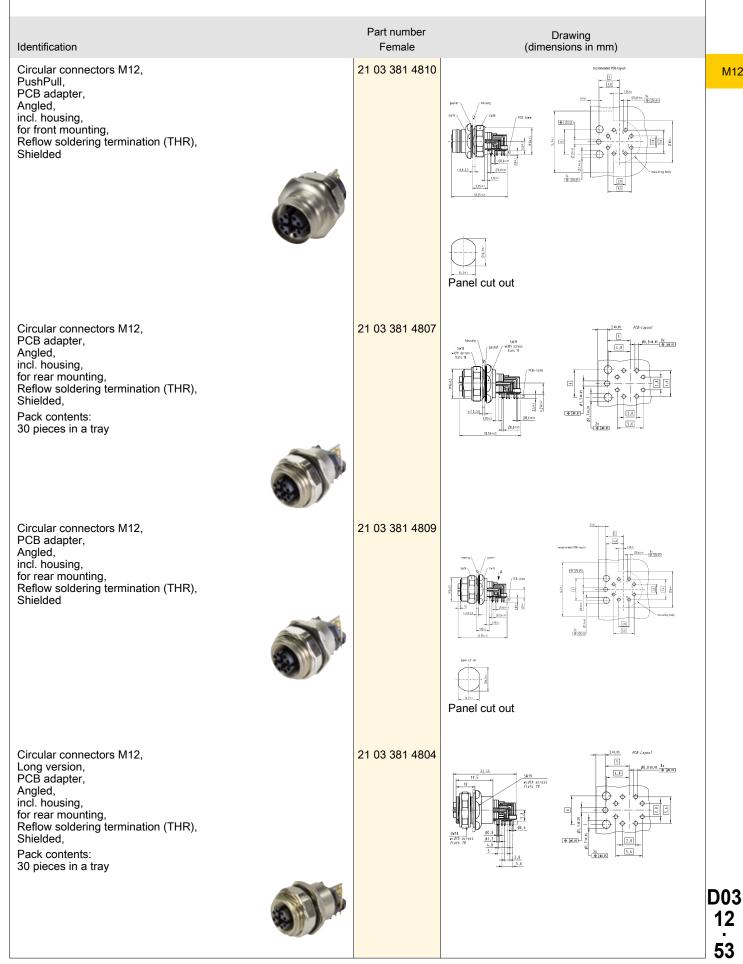




8

M12

Reflow soldering termination (SMT) Shielded



#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 8 \\ \text{Rated current} & 0.5 \text{ A} \\ \text{Rated voltage} & 48 \text{ V} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Mating cycles} & \geq 100 \\ \text{Locking type} & \text{Screw locking} \\ \end{array}$ 

If necessary, order lock nut 21 41 000 0011 separately.

Degree of protection acc. to IEC IP67, when mated

Transmission characteristics

ristics Cat. 6<sub>A</sub>, Class E<sub>A</sub> up to 500 MHz

## Technical characteristics


Tightening torque 1 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)
Material (contacts) Copper alloy

Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

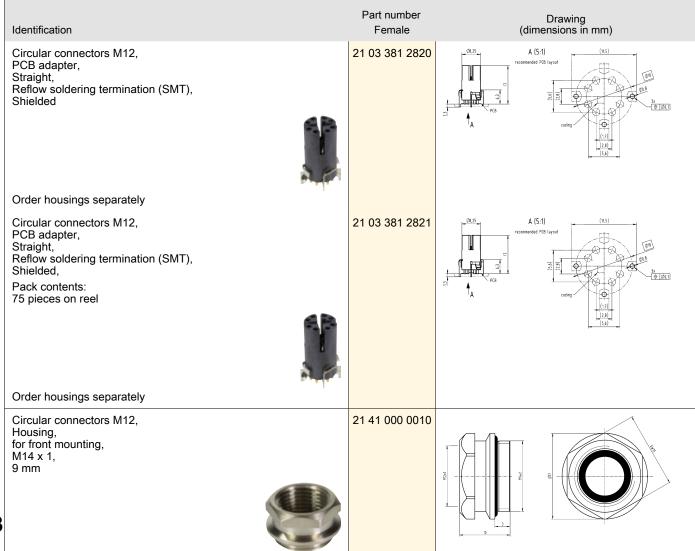





M12


Identification

Circular connectors M12, Housing, for front mounting, M14 x 1, 13 mm 21 41 000 0013

Part number

Female

Drawing (dimensions in mm)

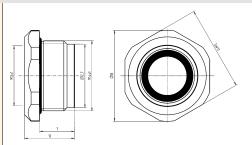

If necessary, order lock nut 21 41 000 0011 separately.

D03 12 55






M12



Reflow soldering termination (THR) Shielded

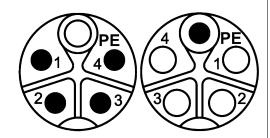

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 12 \text{ A} \\ \text{Rated voltage} & 630 \text{ V} \\ \text{Rated impulse voltage} & 6 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

## Technical characteristics

Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

Material (contacts) Copper alloy Surface (contacts) Gold plated

## Specifications and approvals

Identification	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, PushPull, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 30 pieces in a carton box  Order housings separately	21 03 309 1505 407	21 03 309 2505 407	reconnected P(3-layout A (5:1)  A (5:1)  A (5:1)  A (5:1)  A (5:1)  FEE  PEE  PEE  PEE  PEE  PEE  PEE  PE
Circular connectors M12, Power, PushPull, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray  Order housings separately	21 03 309 1505	21 03 309 2505	PCS   155312   1001.00.





Identification	Part Male	number Female	Drawing (dimensions in mm)	
Circular connectors M12, Housing, for rear mounting, Pack contents: 30 pieces	21 03 302 1000 407	21 03 302 2000 407		
Circular connectors M12, Housing, for front mounting, Pack contents: 30 pieces	21 03 302 1001 407	21 03 302 2001 407		
				D 1

K-coding




Number of contacts





Reflow soldering termination (THR) Shielded

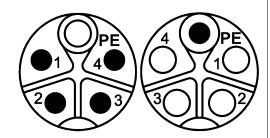

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 12 \text{ A} \\ \text{Rated voltage} & 630 \text{ V} \\ \text{Rated impulse voltage} & 6 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529


## Technical characteristics

Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)
Material (contacts) Copper alloy

Material (contacts) Copper alloy Surface (contacts) Gold plated

## Specifications and approvals

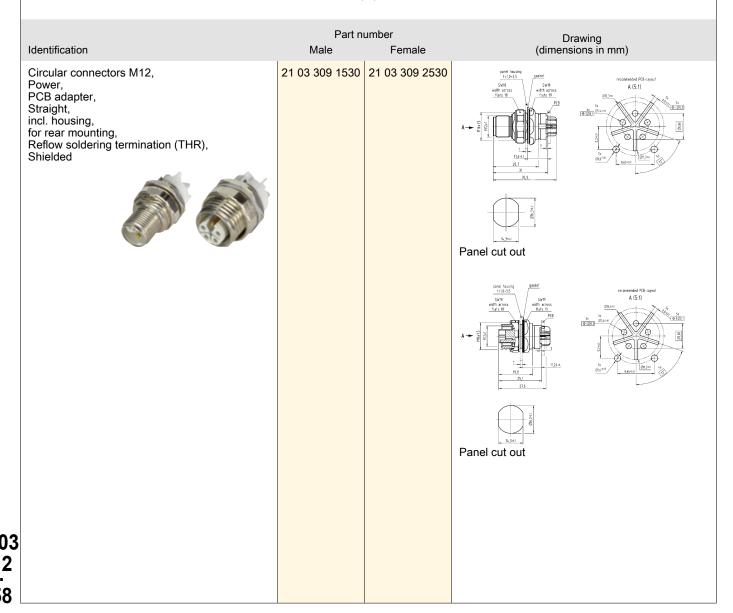



Part number Drawing (dimensions in mm) Identification Male Female recommended PEB-layout A (5:1) 21 03 309 1531 21 03 309 2531 Circular connectors M12, Circular connectors M12,
Power,
PushPull,
PCB adapter,
Straight,
incl. housing,
for front mounting,
Reflow soldering termination (THR),
Shielded Panel cut out Panel cut out

M12

D03

59


L-coding



Number of contacts

4

Reflow soldering termination (THR) Shielded

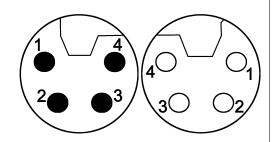

## Technical characteristics

Locking type Screw locking
Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut Material (insert) Polyamide (PA)

## Technical characteristics

Colour (insert) Black
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant, compliant with


exemption

## Specifications and approvals

IEC 61076-2-111



## Part number Drawing Identification Male (dimensions in mm) Female 21 03 396 1506 21 03 396 2506 Circular connectors M12, A (5:1) Power, ended PCB-layout PCB adapter, 6,8 Straight, ⊕ Ø0,1 Reflow soldering termination (THR), 4x ⊕ Ø0,1 Ø1,5=0 Shielded, Pack contents: 60 pieces in a tray ⊕ Ø0,1 A (5:1) Order housings separately 6,8 ⊕ Ø0,1 9'6 ⊕ Ø0,1

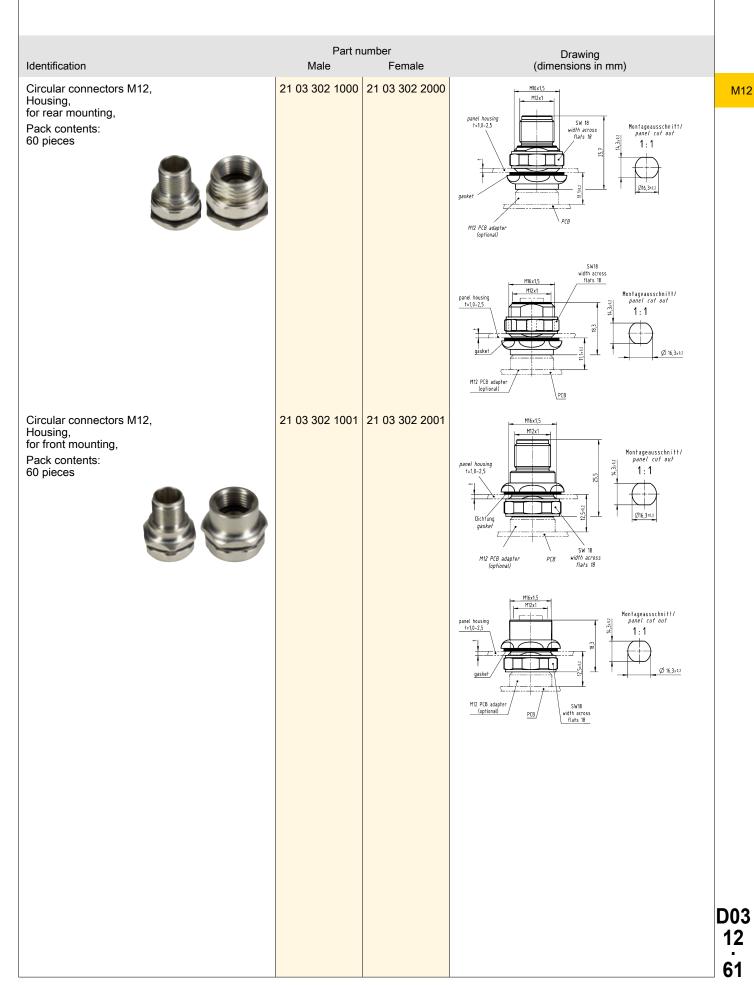

L-coding




Number of contacts

4

M12

Reflow soldering termination (THR) Shielded

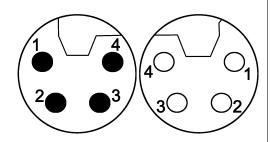

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 16 \text{ A} \\ \text{Rated voltage} & 63 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut Material (insert) Polyamide (PA)

## Technical characteristics

Colour (insert)

Material (hood/housing)

Material (contacts)

Surface (contacts)

RoHS

Black

Zinc die-cast

Copper alloy

Gold plated

compliant

Panel cut out

## Specifications and approvals

IEC 61076-2-111



## Part number Drawing Identification Male Female (dimensions in mm) 21 03 396 1532 21 03 396 2532 Circular connectors M12, A (5:1) mended PCB-layout Power, PCB adapter, 6,8 Ø1,9:0.05 Straight, incl. housing, for front mounting, Reflow soldering termination (THR), Shielded **⊕** Ø0.1⊢ (2:1) Panel cut out A (5:1) mended PCB-layout 6,8 (2:1)



Part number Drawing (dimensions in mm) Identification Male Female 21 03 396 1533 21 03 396 2533 A (5:1) mmended PCB layout Circular connectors M12, panel housing t=1,0+3,5 Power,
PCB adapter,
Straight,
incl. housing,
for rear mounting,
Reflow soldering termination (THR), 6,8 ⊕ Ø0,1 Shielded **⊕** Ø0,1 Panel cut out A (5:1) mended PCB-layout 6,8 4x ⊕ Ø0,1 **⊕** Ø0,1 Panel cut out

M12

L-coding




Number of contacts





Reflow soldering termination (THR) Shielded

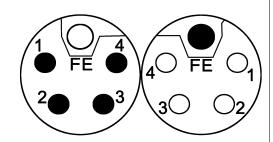

## Technical characteristics

Locking type Screw locking
Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut Material (insert) Polyamide (PA)

## Technical characteristics


Colour (insert) Grey
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals



Identification	Part no	ımber	Drav	ving
	Male	Female	(dimensio	ns in mm)
Circular connectors M12, Power, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray  Order housings separately	1 03 396 1505	21 03 396 2505	X (12.5)	reconnected P(3-layout X (5:1)

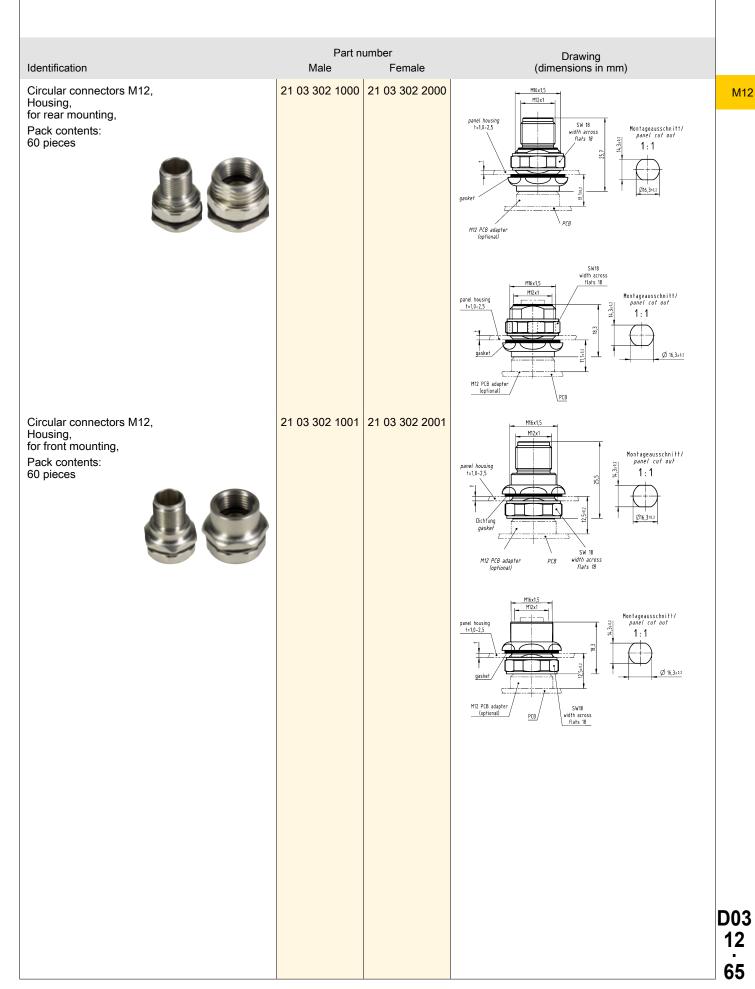

L-coding




Number of contacts



M12



Reflow soldering termination (THR) Shielded

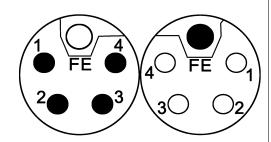

## Technical characteristics

Number of contacts 16 A Rated current 63 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Tightening torque 2 Nm Lock nut Material (insert) Polyamide (PA)

## Technical characteristics

Colour (insert) Grey Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Gold plated Surface (contacts)


RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-111



#### Part number Drawing Identification Male Female (dimensions in mm) 21 03 396 1530 21 03 396 2530 Circular connectors M12, Power, PCB adapter, Straight, incl. housing, for rear mounting, 916 Reflow soldering termination (THR), Shielded 30.9 33,2

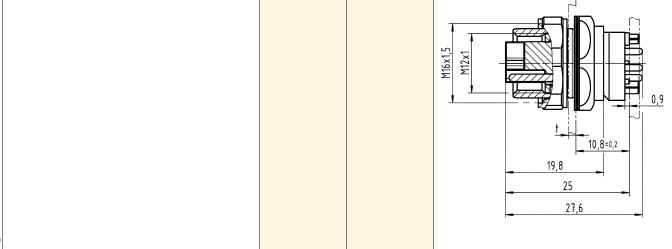



Drawing (dimensions in mm)

Identification

Circular connectors M12,
Power,
PCB adapter,
Straight,
incl. housing,
for front mounting,
Reflow soldering termination (THR),
Shielded







21 03 396 1531 21 03 396 2531

Female

Part number

Male






D03 12 67



3+

Reflow soldering termination (THR) Shielded

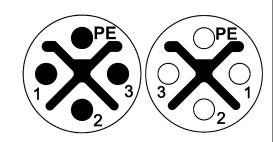

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 3 \\ \text{Rated current} & 12 \text{ A} \\ \text{Rated voltage} & 630 \text{ V} \\ \text{Rated impulse voltage} & 6 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

## Technical characteristics

Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

Material (contacts) Copper alloy Surface (contacts) Gold plated

## Specifications and approvals

IEC 61076-2-111

	Identification	Part n Male	umber Female	Drawing (dimensions in mm)
	Circular connectors M12, Power, PushPull, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 30 pieces in a carton box	21 03 399 1430	21 03 399 2430	recommended P(B-layout 6.40)  4.401  5012.5  5012.5  6
	Order housings separately			000,801 000
	Circular connectors M12, Power, PushPull, PCB adapter, Straight, Reflow soldering termination (THR), Shielded, Pack contents: 60 pieces in a tray Order housings separately	21 03 399 1460	21 03 399 2460	
3	Circular connectors M12, Housing, for rear mounting, Pack contents: 30 pieces	21 03 302 1000 407	21 03 302 2000 407	

M12

S-coding



Identification	Part number Male Female	Drawing (dimensions in mm)	
Identification  Circular connectors M12, Housing, for front mounting, Pack contents: 30 pieces			M
			D0 12




3+

M12



Reflow soldering termination (THR) Shielded

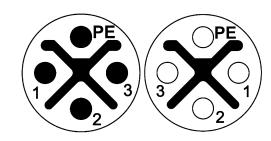

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 3 \\ \text{Rated current} & 12 \text{ A} \\ \text{Rated voltage} & 630 \text{ V} \\ \text{Rated impulse voltage} & 6 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529


## Technical characteristics

Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

Material (contacts) Copper alloy Surface (contacts) Gold plated


## Specifications and approvals

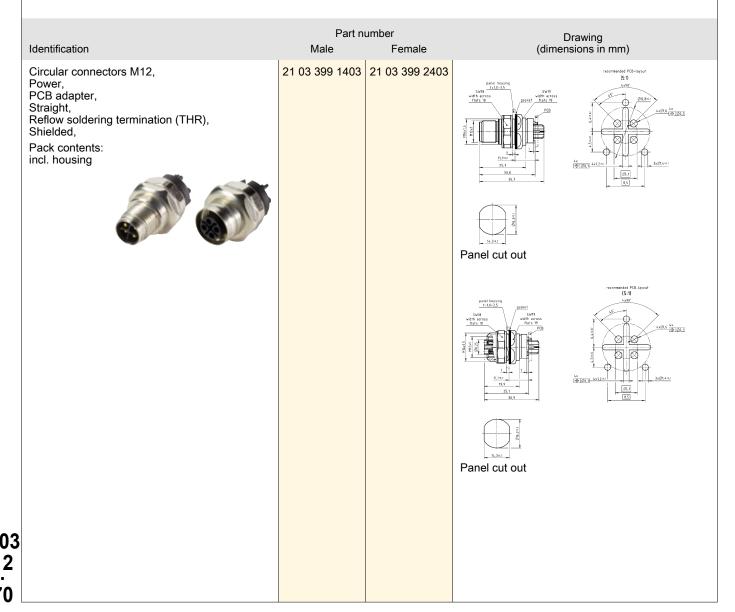

Number of contacts

4

Reflow soldering termination (SMT)



#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 3 \text{ A} \\ \text{Rated voltage} & 57 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Transmission characteristics Cat. 5, Class D up to 100 MHz

## Technical characteristics

Data rate 100 Mbit/s
Tightening torque 2 Nm Lock nut
Material (insert) Liquid crystal polymer (LCP)


Material (contacts) Brass
Surface (contacts) Gold plated

Material (accessories)

RoHS

Brass, nickel plated compliant with exemption

## Specifications and approvals

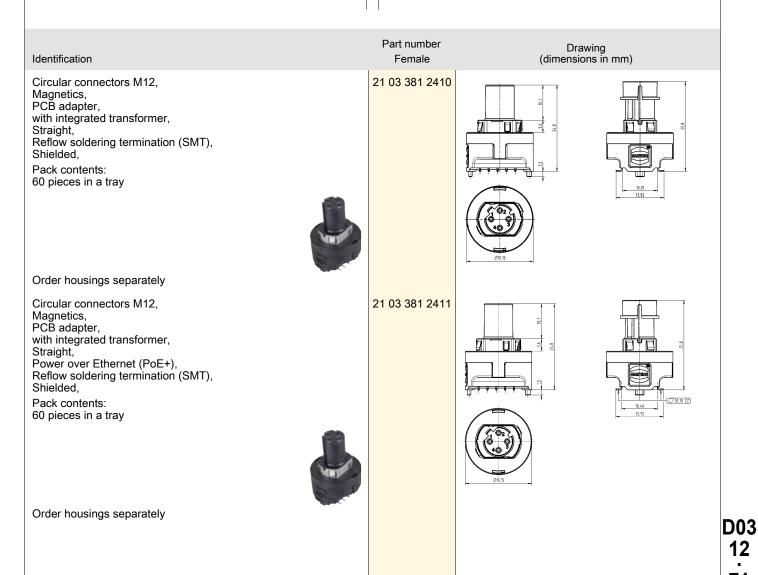



Part number Drawing (dimensions in mm) Identification Female Circular connectors M12, 21 03 381 4420 Magnetics, PCB adapter, with integrated transformer, Angled, Reflow soldering termination (SMT), Shielded, Pack contents: 30 pieces in a tray Order housings separately Circular connectors M12, 21 03 381 4421 Magnetics, PCB adapter, with integrated transformer, Angled, Power over Ethernet (PoE+), Reflow soldering termination (SMT), Shielded, Pack contents: 30 pieces in a tray Order housings separately Circular connectors M12, 21 03 301 2006 PushPull, Housing, for front mounting, Pack contents: 30 pieces Panel cut out

D03 12

M12


## PCB connectors with transformer



Drawing (dimensions in mm) Identification Female 21 03 301 2007 Circular connectors M12, M12 Housing, for rear mounting, Pack contents: 30 pieces

Part number






D03 **73** 



M12

Reflow soldering termination (SMT) Shielded



#### Technical characteristics

Number of contacts Rated current 3 A Rated voltage 57 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Transmission characteristics Cat. 5, Class D up to 100 MHz

## Technical characteristics

Data rate 100 Mbit/s Tightening torque 2 Nm Lock nut

Liquid crystal polymer (LCP) Material (insert)

Material (contacts) **Brass** Surface (contacts) Gold plated

**RoHS** compliant with exemption

## Specifications and approvals

IEC 61076-2-101

#### Identification

Circular connectors M12,

Magnetics, PushPull, PCB adapter,

with integrated transformer,

Straight,

incl. housing, Power over Ethernet (PoE+), for front mounting,


Reflow soldering termination (SMT),

Shielded

## Part number Female

21 03 381 2421

# Drawing (dimensions in mm)







21 03 381 4422

Circular connectors M12.

Magnetics, PushPull, PCB adapter,

with integrated transformer,

Analed.


incl. housing, Power over Ethernet (PoE+),


for front mounting,

Reflow soldering termination (SMT),

Shielded










**D03** 

Number of contacts

Reflow soldering termination (SMT)



### Technical characteristics

Number of contacts 0.8 A Rated current Rated voltage 57 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Transmission characteristics Cat. 6A, Class EA up to 500 MHz

### Technical characteristics

Data rate 1 Gbit/s Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

Material (contacts) **Brass** Surface (contacts) Gold plated Material (accessories) Brass, nickel plated **RoHS** compliant with exemption

## Specifications and approvals

IEC 61076-2-109

## Part number Drawing (dimensions in mm) Identification Female Circular connectors M12, 21 03 381 2815 Magnetics, PCB adapter, with integrated transformer, Straight, Reflow soldering termination (SMT), Shielded, Pack contents: 60 pieces in a tray Order housings separately Circular connectors M12, 21 03 381 2817 Magnetics, PCB adapter, with integrated transformer, Power over Ethernet (PoE+), Reflow soldering termination (SMT), Shielded, Pack contents: 60 pieces in a tray Order housings separately

# PCB connectors with transformer





	Identification	Part number Female	Drawing (dimensions in mm)
	Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Angled, Reflow soldering termination (SMT), Shielded, Pack contents: 30 pieces in a tray  Order housings separately	21 03 381 4820	0.555 4x(27)(-7)(2) 1.22 P13 P14 P17 P1
	Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Angled, Power over Ethernet (PoE+), Reflow soldering termination (SMT), Shielded, Pack contents: 30 pieces in a tray  Order housings separately	21 03 381 4822	9.525 6x127 -162) P30 P84 P81 P5 P8
3	Circular connectors M12, PushPull, Housing, for front mounting, Pack contents: 30 pieces	21 03 301 2006	Panel cut out

D03 12 ...

## PCB connectors with transformer





Drawing (dimensions in mm) M12

Identification

Circular connectors M12,


Housing, for rear mounting,

Pack contents: 30 pieces



Part number

Female 21 03 301 2007




D03



M12

Reflow soldering termination (SMT)



#### Technical characteristics

Number of contacts 0.8 A Rated current Rated voltage 57 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Transmission characteristics Cat. 6A, Class EA up to 500 MHz

## Technical characteristics

Data rate 1 Gbit/s Tightening torque 2 Nm Lock nut

Material (insert) Liquid crystal polymer (LCP)

Material (contacts) **Brass** Surface (contacts) Gold plated

**RoHS** compliant with exemption

## Specifications and approvals

IEC 61076-2-109

#### Identification

Circular connectors M12,

Magnetics, PushPull, PCB adapter,

with integrated transformer, Straight,

incl. housing, Power over Ethernet (PoE+),

for front mounting,

Reflow soldering termination (SMT),


Shielded




Part number Female

21 03 381 2824







Circular connectors M12,

Magnetics, PushPull, PCB adapter,

with integrated transformer, Angled,

incl. housing, Power over Ethernet (PoE+),


for front mounting,


Reflow soldering termination (SMT),

Shielded




21 03 381 4826





Number of contacts

Reflow soldering termination (SMT)



### Technical characteristics

Number of contacts 0.8 A Rated current Rated voltage 57 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Transmission characteristics Cat. 6<sub>A</sub>, Class E<sub>A</sub> up to 500 MHz


### Technical characteristics

Data rate 10 Gbit/s Tightening torque 2 Nm Lock nut Material (insert)

Liquid crystal polymer (LCP)

Material (contacts) Brass Surface (contacts) Gold plated Material (accessories) Brass, nickel plated **RoHS** compliant with exemption

## Specifications and approvals

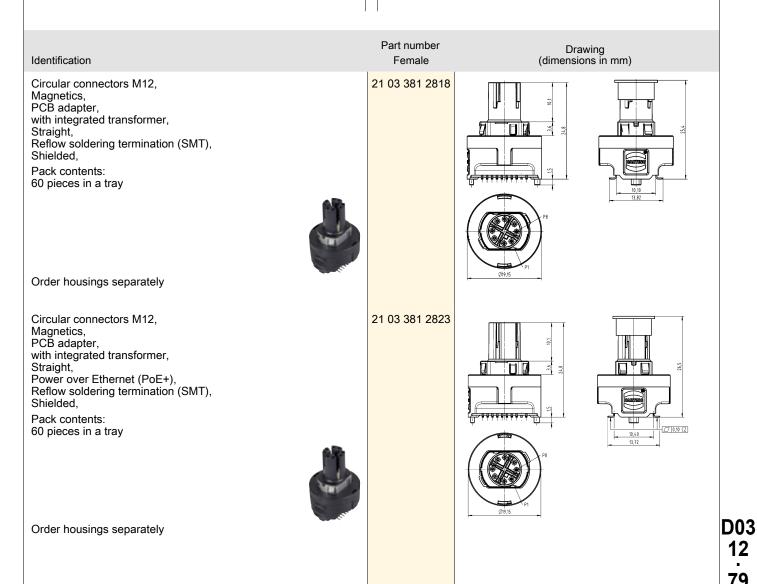

# PCB connectors with transformer





	Identification	Part number Female	Drawing (dimensions in mm)
M12	Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Angled, Reflow soldering termination (SMT), Shielded, Pack contents: 30 pieces in a tray  Order housings separately	21 03 381 4823	9.555
	Circular connectors M12, Magnetics, PCB adapter, with integrated transformer, Angled, Power over Ethernet (PoE+), Reflow soldering termination (SMT), Shielded, Pack contents: 30 pieces in a tray  Order housings separately	21 03 381 4825	8.555 4.17(7.62) 1.27 P10
D03 12 80	Circular connectors M12, PushPull, Housing, for front mounting, Pack contents: 30 pieces	21 03 301 2006	Panel cut out

## PCB connectors with transformer





M12


Part number Female

21 03 301 2007

Circular connectors M12, Housing, for rear mounting, Pack contents: 30 pieces

Identification






Drawing (dimensions in mm)



M12

Reflow soldering termination (SMT)



#### Technical characteristics

Number of contacts 0.8 A Rated current Rated voltage 57 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Transmission characteristics Cat. 6A, Class EA up to 500 MHz

## Technical characteristics

Data rate 10 Gbit/s Tightening torque 2 Nm Lock nut

Liquid crystal polymer (LCP) Material (insert)

Material (contacts) **Brass** Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-109

#### Identification

Circular connectors M12,

Magnetics, PushPull, PCB adapter,

with integrated transformer,

Straight,

incl. housing, Power over Ethernet (PoE+),

for front mounting,

Reflow soldering termination (SMT),


Shielded



Part number Female

21 03 381 2825

Drawing (dimensions in mm)





Circular connectors M12,

Magnetics, PushPull, PCB adapter,

with integrated transformer,

Angled,

incl. housing, Power over Ethernet (PoE+),


for front mounting,


Reflow soldering termination (SMT),

Shielded




21 03 381 4827





Number of contacts

Unshielded



## Technical characteristics

Number of contacts 4 A Rated current Rated voltage 250 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking

50 cm

Conductor length

Degree of protection acc. to IEC IP67, when mated

0.25 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 24

## Technical characteristics

Tightening torque 2 Nm Lock nut Polyamide (PA) Material (insert) Material (hood/housing) Zinc die-cast Material (contacts) Brass Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101


 $\epsilon$ 

Identification	Conductor cross-section (mm²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded	0.25	21 03 317 6305	20,5  a  12  W12 A-coded 3-poles, female straight PFT connector
without lock nut			



4

Unshielded

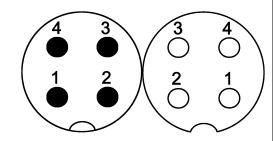

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 250 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking
Conductor length 50 cm, 100 cm
Degree of protection acc. to IEC IP67, when mated

2 Nm Lock nut

60529
Conductor cross-section
Conductor cross-section
Conductor cross-section

0.5 mm², 0.25 mm²
AWG 20, AWG 24

Tightening torque

## Technical characteristics

Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079

 $\epsilon$ 

Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded, Pack contents: incl. lock nut	0.5	21 03 311 1402	21 03 311 2400	Throwing 2 (white) 5 WIT 1 SWIT 1 SWI
3				

# Panel feed through



Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded without lock nut 21 03 317 6405 21 03 317 6410 0.25 M12 A-coded 4-pole, female straight PFT connector 21 03 317 6405: a = 50 cm 21 03 317 6410: a = 100 cm


M12

D03 12 ... 85



5

Unshielded

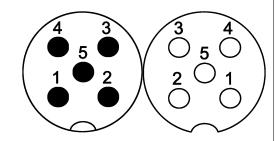

#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 5 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking
Conductor length 50 cm, 100 cm
Degree of protection acc. to IEC IP67, when mated 60529

Conductor cross-section 0.5 mm², 0.25 mm²
Conductor cross-section AWG 20, AWG 24
Tightening torque 2 Nm Lock nut

#### Technical characteristics

Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079


 $\epsilon$ 

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded, Pack contents: incl. lock nut	0.5	21 03 311 1501	1	(uniterisions if film)  1 bravel  5 (grey)  1 (black)  1 (black)
Circular connectors M42	0.25		24 02 247 6505	3   block
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded without lock nut	0.25		21 03 317 6505 21 03 317 6510	21 03 317 6505: a = 50 cm 21 03 317 6510: a = 100 cm

M12

Number of contacts

Unshielded



#### Technical characteristics

Number of contacts Rated current 2 A Rated voltage 30 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100

Locking type Screw locking Conductor length 50 cm, 100 cm Degree of protection acc. to IEC IP67, when mated

0.25 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 24

#### Technical characteristics

Tightening torque 2 Nm Lock nut Polyamide (PA) Material (insert) Material (hood/housing) Zinc die-cast Material (contacts) Brass

Surface (contacts) Gold plated

RoHS compliant with exemption


## Specifications and approvals

IEC 61076-2-101



Identification	Conductor cross-section (mm²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded	0.25 0.25	21 03 317 6805 21 03 317 6810	20,5  12  12  M12 A-coded 8-poles, female straight PFT connector  21 03 317 6805: a = 50 cm
without lock nut			21 03 317 6810: a = 50 cm 21 03 317 6810: a = 100 cm





## Technical characteristics

Number of contacts 1.5 kV Rated impulse voltage Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking Conductor length 50 cm

Degree of protection acc. to IEC IP67, when mated

60529

0.13 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 26 Tightening torque 2 Nm Lock nut

#### Technical characteristics


Material (insert) Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) Brass Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101

 $\epsilon$ 

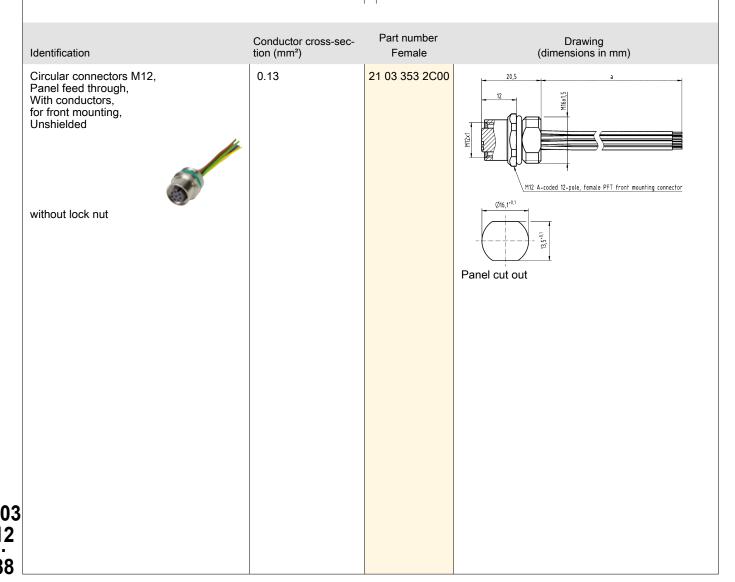


M12

Number of contacts

4

Unshielded



## Technical characteristics

Number of contacts 4 A Rated current Rated voltage 60 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type

Locking type Screw locking
Conductor length 50 cm

Degree of protection acc. to IEC IP67, when mated

30<u>5</u>29

Conductor cross-section 0.34 mm<sup>2</sup>

## Technical characteristics

Conductor cross-section AWG 22
Tightening torque 2 Nm Lock nut
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals


IEC 61076-2-101

Identification	Conductor cross-section (mm²)	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded	0.34	21 03 338 6405	20,5 12 60 0/15,3-0.1
without lock nut			Panel cut out



5

Unshielded

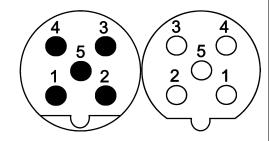

## Technical characteristics

Number of contacts Rated current 4 A 60 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking Conductor length 20 cm

Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 0.34 mm<sup>2</sup> Conductor cross-section AWG 22

#### Technical characteristics

Tightening torque 2 Nm Lock nut
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated


RoHS compliant, compliant with

exemption

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

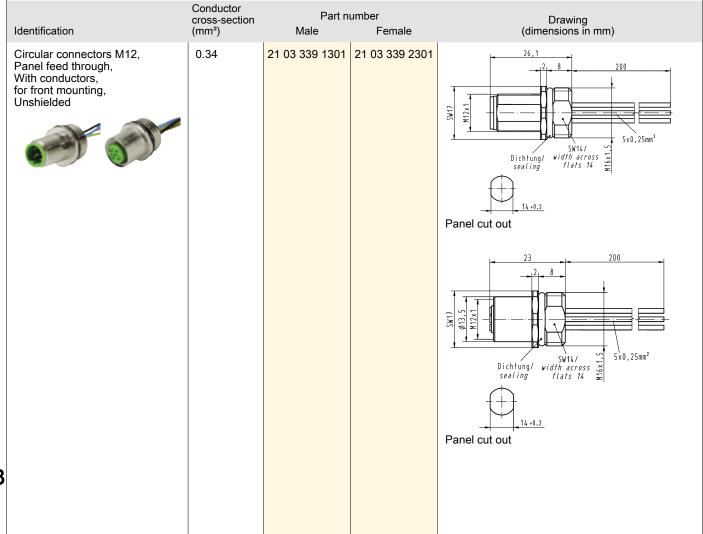


M12

Number of contacts

4

Unshielded

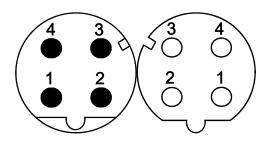

#### Technical characteristics

 Number of contacts
 4

 Rated current
 4 A

 Rated voltage
 250 V

 Rated impulse voltage
 1.5 kV

 Pollution degree
 3

 Insulation resistance
 >108 Ω

 Contact resistance
 ≤10 mΩ

 Mating cycles
 ≥100

 Locking type
 Screw lock

Locking type Screw locking
Conductor length 50 cm

Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 0.34 mm², 0.5 mm²
Conductor cross-section AWG 22, AWG 20

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 2 Nm Lock nut

#### Technical characteristics


Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079



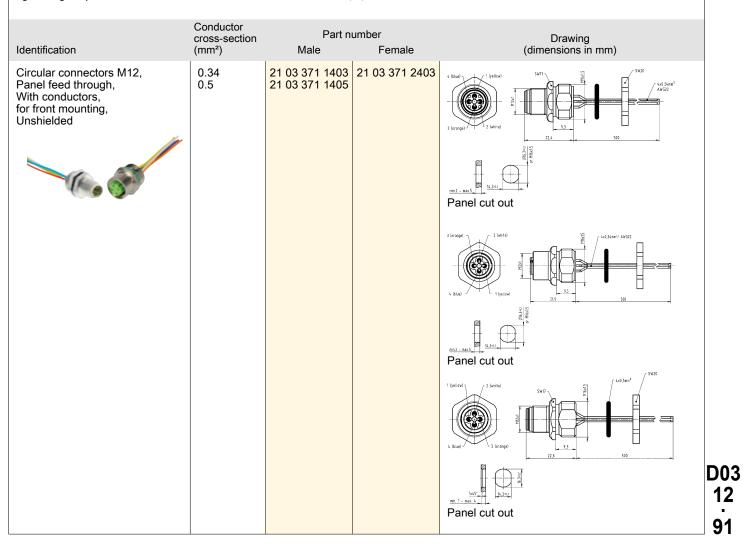

# Panel feed through




Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Male Identification Female Circular connectors M12, Panel feed through, With conductors, for front mounting, Unshielded 0.34 21 03 375 2400 PG9 without lock nut Panel cut out **D03** 

M12



4x 2x AWG 24/7 Shielded



#### Technical characteristics

Number of contacts

Core structure

4x 2x AWG 24/7, 4x 2x AWG 26/7

Rated current

0.5 A 50 V

Rated voltage Rated impulse voltage Pollution degree

1.5 kV 3

Insulation resistance Contact resistance

>108 Ω ≤10 mΩ ≥100

Mating cycles Locking type

Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Cat.  $6_A$ , Class  $E_A$  up to 500 MHz

Transmission characteristics Tightening torque

2 Nm Lock nut

#### Technical characteristics

Material (insert)

Liquid crystal polymer (LCP)

Material (hood/housing) Material (contacts)

Zinc die-cast Brass

Surface (contacts)

Gold plated

RoHS

compliant with exemption

# Specifications and approvals

IEC 61076-2-109

#### **Details**

Other cable lengths on request!


Identification	Cable length	Part number Female	Drawing (dimensions in mm)
Circular connectors M12, Panel feed through, Pre-assembled on one side, EtherRail cable (4x 2x AWG 24/7), for rear mounting, Shielded	0.3 m 0.5 m 1 m 1.5 m	21 33 070 0853 003 21 33 070 0853 005 21 33 070 0853 010 21 33 070 0853 015	
Circular connectors M12, Panel feed through, Pre-assembled on one side, Industrial Ethernet cable (4x 2x AWG 26/7), for rear mounting, Shielded	0.3 m 0.5 m 1 m 1.5 m	21 33 080 0850 003 21 33 080 0850 005 21 33 080 0850 010 21 33 080 0850 015	with cross and the cross and t







Shielded

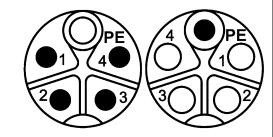

#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 12 \text{ A} \\ \text{Rated voltage} & 630 \text{ V} \\ \text{Rated impulse voltage} & 6 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull

Conductor length 30 cm

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

## Technical characteristics

Conductor cross-section

Tightening torque

Material (insert)

Material (contacts)

2.5 mm², 1.5 mm²

0.6 Nm, 2 Nm Lock nut

Polyamide (PA)

Brass

Material (contacts) Brass
Surface (contacts) Gold plated

## Specifications and approvals


IEC 61076-2-111

	Identification	Conductor cross-section (mm²)	Part no	umber Female	Drawing (dimensions in mm)
	Circular connectors M12, Power, Panel feed through, With conductors, for front mounting, Shielded	1.5 2.5	21 03 309 5503 21 03 309 5501	21 03 309 6503 21 03 309 6501	### SW17  PE (green/ysitou)  4(black)  1(brown)  1(brown)  1(grey)  3(black)  1(grey)  3(black)  4(black)  4(black)  4(black)  4(black)  5(c)  5
					Panel cut out
	Circular connectors M12, Power, Panel feed through, With conductors, for rear mounting, Shielded	1.5 2.5	21 03 309 5504 21 03 309 5502		0/32 SW20 panel bossing with arross frists 20 Strip 1.2,0+5.0 with arross frists 20 Strip 1.2,0+5.0 with arross frists 13 Strip 1.3,0 Strip 1.
					Panel cut out
2					SW20 yith across panel housing width across flats 17 (Tats 18 ) 0. Rox 122,9-5.0 (Tats 17 )  A(black) Torowal 12,5x1,8 (300)
3 <u>?</u> I					Panel cut out

DO



Unshielded

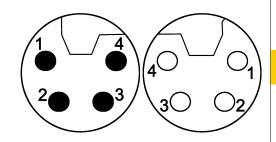

#### Technical characteristics

Number of contacts Rated current 16 A 63 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking Conductor length 30 cm

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 1.5 mm<sup>2</sup>, 2.5 mm<sup>2</sup> Conductor cross-section AWG 16, AWG 14 Tightening torque 2 Nm Lock nut Material (insert) Polyamide (PA)

#### Technical characteristics

Colour (insert) Black Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Gold plated Surface (contacts)


RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-111 UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521



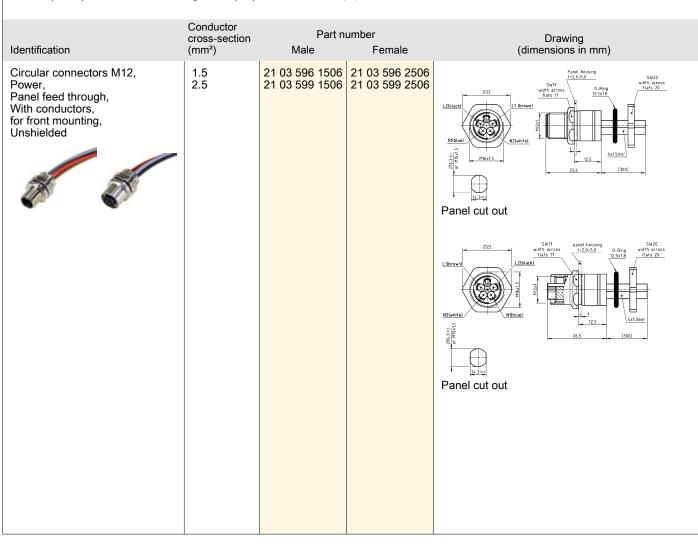


M12




Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Male Female 21 03 596 1516 21 03 596 2516 21 03 599 1516 21 03 599 2516 1.5 2.5 Circular connectors M12, Power, Panel feed through, With conductors, for rear mounting, Unshielded Panel cut out Panel cut out D03 96





Unshielded

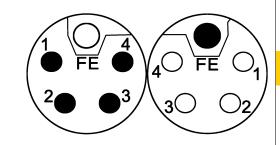

#### Technical characteristics

Number of contacts 16 A Rated current 63 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Screw locking Locking type

Conductor length 30 cm

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

1.5 mm<sup>2</sup>, 2.5 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 16, AWG 14 Tightening torque 2 Nm Lock nut Material (insert)

## Technical characteristics


Colour (insert) Grey Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Gold plated Surface (contacts)

RoHS compliant with exemption

# Specifications and approvals


IEC 61076-2-111 UL 2238 CYJV2.E302521 CSA-C22.2 No. 182.3 CYJV8.E302521

*99999* 




Identification	Conductor cross-section (mm²)	Part n	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, Panel feed through, With conductors, for front mounting, Unshielded	1.5 2.5	21 03 596 1505 21 03 599 1505	21 03 596 2505 21 03 599 2505	Panel bousing 1-2,0-5,0 SW17 Vidth across Flats 17 Flats
				Panel cut out
Circular connectors M12, Power, Panel feed through, With conductors, for rear mounting, Unshielded	1.5 2.5	21 03 596 1515 21 03 599 1515	21 03 596 2515 21 03 599 2515	





Unshielded

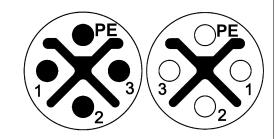

#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 3 \\ \text{Rated current} & 12 \text{ A} \\ \text{Rated voltage} & 630 \text{ V} \\ \text{Rated impulse voltage} & 6 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

## Technical characteristics

Conductor cross-section
Conductor cross-section
Tightening torque
Material (insert)
Material (contacts)
Surface (contacts)

1.5 mm², 2.5 mm²
AWG 16, AWG 14
0.6 Nm, 2 Nm Lock nut
Polyamide (PA)
Brass
Gold plated

## Specifications and approvals

IEC 61076-2-111

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, Panel feed through, With conductors, for front mounting, Unshielded	1.5 2.5	21 03 396 1401 21 03 399 1401	21 03 396 2401 21 03 399 2401	SW17   SW20
				Panel cut out
				SW17  Panel housing  O-Ring  12,5x1.6  Flats 17  I(black)  I(black
				Panel cut out
				SW17
				Panel cut out



Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Male Female 21 03 396 1402 21 03 396 2402 21 03 399 1402 21 03 399 2402 1.5 2.5 Circular connectors M12, Power, Panel feed through, With conductors, for rear mounting, Unshielded Panel cut out Panel cut out Panel cut out


M12

M12

## Technical characteristics

RoHS

compliant with exemption, compliant

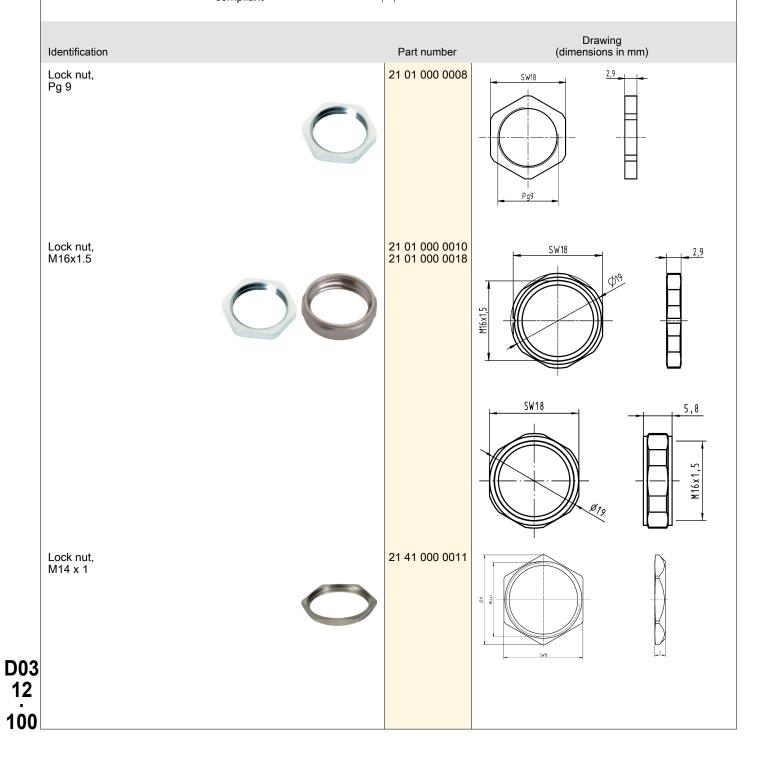


# Technical characteristics

Degree of protection acc. to IEC IP65 / IP67, IP67 60529

## Technical characteristics

Material (accessories) Colour (accessories) RoHS Thermoplastic Black compliant

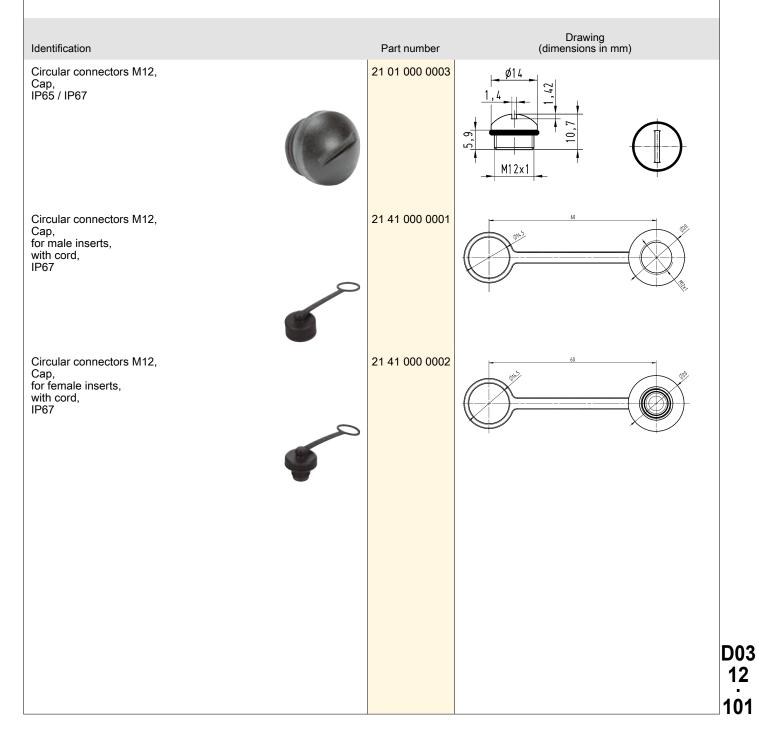

M12

## Technical characteristics

Degree of protection acc. to IEC IP65 / IP67 60529

# Technical characteristics

Material (accessories) RoHS Metal compliant with exemption

Identification		Part number	Drawing (dimensions in mm)
Circular connectors M12, Cap, for female inserts, with cord		21 01 000 0030	
	•		
Circular connectors M12, Cap, for female inserts, with cable clip		21 01 000 0031	3 (13a)
	· · · · · · · · · · · · · · · · · · ·		
Circular connectors M12, Cap, for male inserts, with cord		21 01 000 0033	50.1 Marin
	•		
Circular connectors M12, Cap, for male inserts, with cable clip		21 01 000 0038	\$ 19.1
	On the second		



Contents	Page	
M23 Signal inserts	D03 23.2	
M23 Signal contacts	D03 23.22	
M23 Signal Hoods/Housings	D03 23.23	
M23 Power inserts	D03 23.28	
M23 Power contacts	D03 23.33	
M23 Power Hoods/Housings	D03 23.34	
		ח
		D 2


D03 23 . 1



Number of contacts



Crimp termination

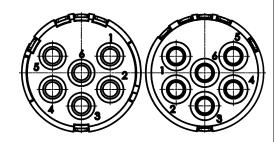

## Technical characteristics

Number of contacts6Rated current20 ARated voltage300 VRated impulse voltage2.5 kVPollution degree3Insulation resistance>1010 ΩLimiting temperature-40 ... +125 °CMating cycles≥500

Conductor cross-section 0.75 ... 2.5 mm²
Material (insert) Polyamide (PA)

## Technical characteristics

Colour (insert) White Material flammability class acc. V-0 to UL 94

RoHS compliant

# Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawir (dimensions	ng in mm)
Circular connectors M23, Signal, Inserts, Crimp termination	0.75 2.5	09 15 106 3001	09 15 106 3101	11,6	Ø17 —
Please order crimp contacts separately. 6x 2 mm				20,1	Ø17


M23



Number of contacts



Solder termination

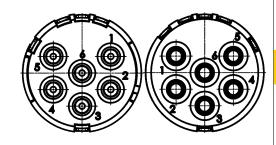

## Technical characteristics

Number of contacts 20 A Rated current Rated voltage 300 V Rated impulse voltage  $2.5 \, kV$ Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles Conductor cross-section 2.5 mm² max. Material (insert) Polyamide (PA) Colour (insert) White

# Technical characteristics

Material (contacts) Copper alloy Gold plated Surface (contacts) Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

# Specifications and approvals


Identification	Conductor cross-section (mm²)	Part n	umber Female	Drawing (dimensions in	mm)
Circular connectors M23, Signal, Inserts, Solder termination	2.5 max.	09 15 106 2602	09 15 106 2702	7,5	Ø17 ————————————————————————————————————
				(22,2)	Ø17 —



Number of contacts



PCB solder termination

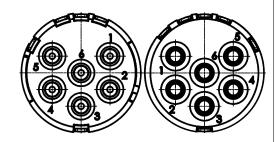

#### Technical characteristics

 Number of contacts
 6

 Rated current
 20 A

 Rated voltage
 300 V

 Rated impulse voltage
 2.5 kV

 Pollution degree
 3

 Insulation resistance
 >10¹⁰ Ω

 Limiting temperature
 -40 ... +125 °C

 Mating cycles
 ≥500

Material (insert) Polyamide (PA)

Colour (insert) White

## Technical characteristics


Material (contacts) Copper alloy Surface (contacts) Gold plated Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

## Specifications and approvals

UL 1977 ECBT2.E235076

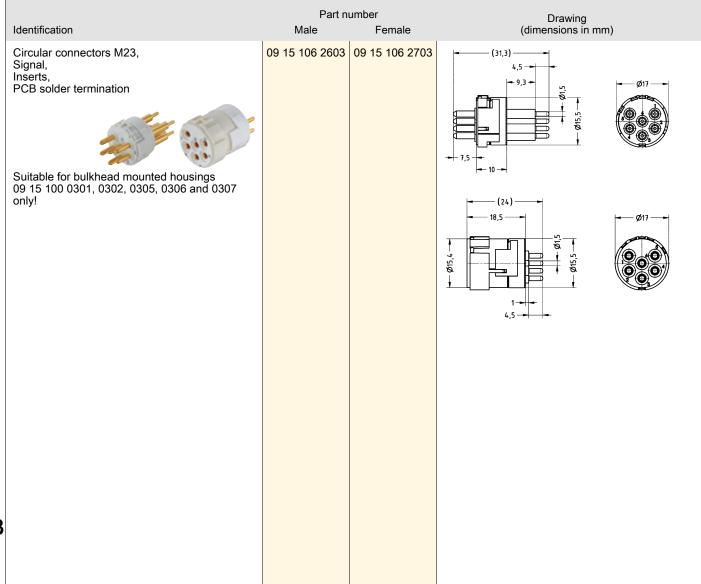

M23


D03 23



Number of contacts

7

Crimp termination

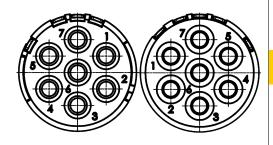

## Technical characteristics

Conductor cross-section 0.75 ... 2.5 mm²
Material (insert) Polyamide (PA)

## Technical characteristics

Colour (insert) White Material flammability class acc. V-0

to UL 94 RoHS

compliant with exemption


## Specifications and approvals

Circular connectors M23, Signal, Inserts, Crimp termination  O.75 2.5  O9 15 107 3001  O9 15 107 3101  Please order crimp contacts separately. 7x 2 mm	Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Draw (dimension	ing s in mm)
	Circular connectors M23, Signal, Inserts, Crimp termination	I		1	20,1	Ø17 —



Number of contacts

Solder termination

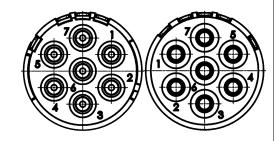

## Technical characteristics

Number of contacts 20 A Rated current Rated voltage 300 V Rated impulse voltage 2.5 kV Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles

Conductor cross-section 2.5 mm<sup>2</sup> max. Material (insert) Polyamide (PA)

Colour (insert) White

## Technical characteristics

Material (contacts) Copper alloy Gold plated Surface (contacts) Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

# Specifications and approvals

UL 1977 ECBT2.E235076


Identification	Conductor cross-section (mm²)	Part number Male Female		Drawing (dimensions in mm)
Circular connectors M23, Signal, Inserts, Solder termination	2.5 max.	09 15 107 2602	09 15 107 2702	7,5 017 017 017 017 017 017 017 017 017 017
				(22,2) 18,5 3,7
3				

M23



Number of contacts

PCB solder termination

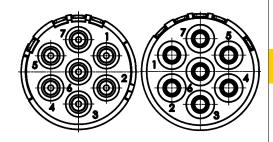

#### Technical characteristics

Number of contacts 20 A Rated current 300 V Rated voltage Rated impulse voltage 2.5 kV Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles

Material (insert) Polyamide (PA)

Colour (insert) White

## Technical characteristics


Material (contacts) Copper alloy Gold plated Surface (contacts)

Material flammability class acc.

to UL 94

RoHS compliant with exemption

## Specifications and approvals

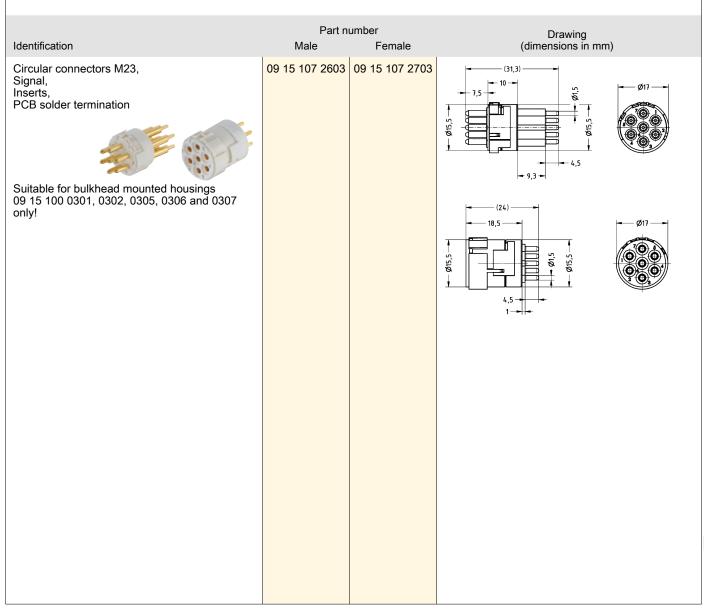




Number of contacts

8

+ 1 additional special contact Crimp termination

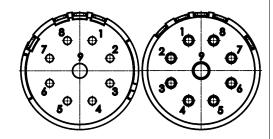

#### Technical characteristics

Number of contacts

Additional contacts + 1 additional special contact

Rated current 8 A
Rated voltage 200 V
Rated impulse voltage 2.5 kV
Pollution degree 3
Rated current (special contact) 20 A
Rated voltage (special contact) 200 V
Rated impulse voltage (special 2.5 kV contact)

Pollution degree (special

contact)

Insulation resistance  $>10^{10} \Omega$ 

## Technical characteristics

Limiting temperature -40 ... +125 °C

Mating cycles ≥500

Conductor cross-section 0.08 ... 1.5 mm² Material (insert) Polyamide (PA)

Colour (insert) White Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

# Specifications and approvals

UL 1977 ECBT2.E235076


Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)	
Circular connectors M23, Signal, Inserts, Crimp termination	0.08 1.5	09 15 109 3001	09 15 109 3101	12	Ø17 ————————————————————————————————————
Please order crimp contacts separately. 8x 1 mm 1x 2 mm				20 555	Ø17  20 00 00 00 00 00 00 00 00 00 00 00 00
3					

M23



Number of contacts

+ 1 additional special contact Solder termination

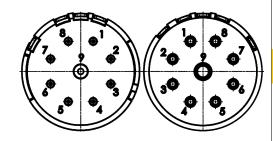

#### Technical characteristics

Number of contacts

+ 1 additional special contact Additional contacts

Rated current 8 A Rated voltage 200 V Rated impulse voltage 2.5 kV Pollution degree Rated current (special contact) 20 A Rated voltage (special contact) 200 V Rated impulse voltage (special 2.5 kV contact)

Pollution degree (special

contact)

Insulation resistance  $>10^{10} \Omega$ Limiting temperature -40 ... +125 °C

#### Technical characteristics


≥500 Mating cycles Conductor cross-section 1 mm² max. Material (insert) Polyamide (PA) Colour (insert) White Material (contacts) Copper alloy Surface (contacts) Gold plated

Material flammability class acc.

to UL 94

RoHS compliant with exemption

## Specifications and approvals

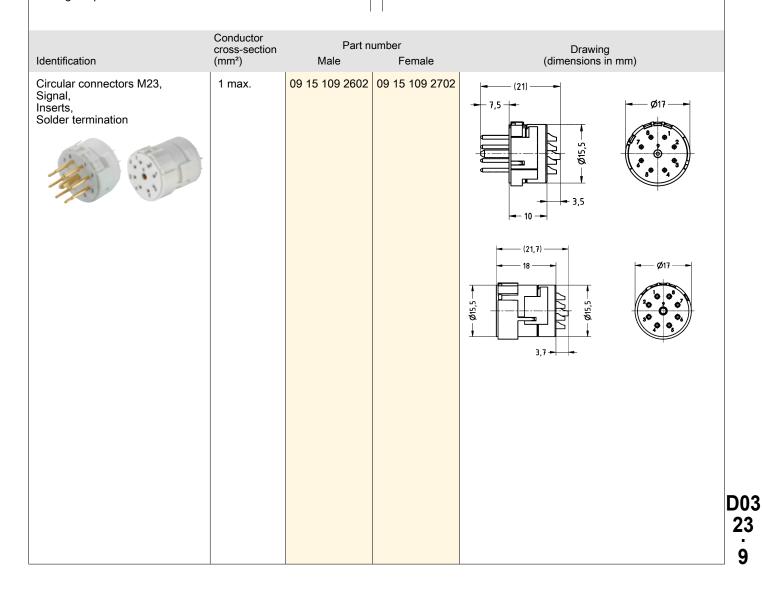




Number of contacts

8

M23

+ 1 additional special contact PCB solder termination

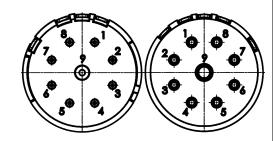

## Technical characteristics

Number of contacts 8

Additional contacts + 1 additional special contact

Rated current 8 A
Rated voltage 200 V
Rated impulse voltage 2.5 kV
Pollution degree 3
Rated current (special contact) 20 A
Rated voltage (special contact) 200 V
Rated impulse voltage (special 2.5 kV

contact)

Pollution degree (special

contact)

Insulation resistance  $>10^{10} \Omega$ Limiting temperature  $-40 \dots +125 ^{\circ} C$ 

#### Technical characteristics

Mating cycles ≥500

Material (insert) Polyamide (PA)
Colour (insert) White
Material (contacts) Copper alloy
Surface (contacts) Gold plated

Material flammability class acc. V-

to UL 94

RoHS compliant with exemption

## Specifications and approvals

UL 1977 ECBT2.E235076

Part number Drawing Identification Male Female (dimensions in mm)

Circular connectors M23,


Signal, Inserts,


PCB solder termination



Suitable for bulkhead mounted housings 09 15 100 0301, 0302, 0305, 0306 and 0307 only!

09 15 109 2603 09 15 109 2703










11+

Crimp termination

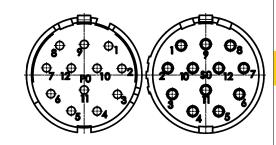

## Technical characteristics

Number of contacts11Rated current8 ARated voltage200 VRated impulse voltage2.5 kVPollution degree3Insulation resistance>1010  $\Omega$ Limiting temperature-40 ... +125 °CMating cycles $\geq$ 500

Conductor cross-section 0.08 ... 1.5 mm²
Material (insert) Polyamide (PA)

## Technical characteristics

Colour (insert) Grey Material flammability class acc. V-0

to UL 94 RoHS

compliant with exemption


## Specifications and approvals

Identification	Conductor cross-section (mm²)	Part number Male Female		Drawing (dimensions in mm)	
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 12x 1 mm	0.08 1.5	ı	09 15 112 3121	(dimens)	Ø17  Ø17  Ø17  Ø19  Ø19  Ø19  Ø19  Ø19



Number of contacts

Solder termination

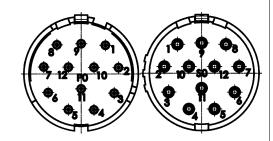

#### Technical characteristics

Number of contacts Rated current 8 A Rated voltage 200 V Rated impulse voltage 2.5 kV Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles Conductor cross-section 1 mm² max. Material (insert) Polyamide (PA)

Grey

Colour (insert)

## Technical characteristics

Material (contacts) Copper alloy Gold plated Surface (contacts) Material flammability class acc. V-0

to UL 94


RoHS compliant with exemption

# Specifications and approvals

	Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
	Circular connectors M23, Signal, Inserts, Solder termination	1 max.	09 15 112 2622	09 15 112 2722	7,5 — Ø17 —
					(20,7) 17 95 8 3,7
3					

Number of contacts

Crimp termination

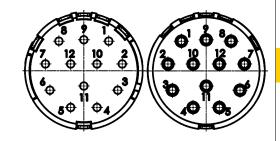

## Technical characteristics

Number of contacts 8 A Rated current Rated voltage 200 V Rated impulse voltage  $2.5 \, kV$ Pollution degree Insulation resistance  $>10^{10} \Omega$ Limiting temperature -40 ... +125 °C ≥500 Mating cycles

Conductor cross-section 0.08 ... 1.5 mm<sup>2</sup> Material (insert) Polyamide (PA)

## Technical characteristics

Colour (insert) White Material flammability class acc. V-0

to UL 94 RoHS

compliant with exemption,

compliant

## Specifications and approvals


Identification	Conductor cross-section (mm²)	Part n	umber Female	Draw (dimension	ving ns in mm)
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 12x 1 mm	0.08 1.5	09 15 112 3001	09 15 112 3101	19,6	Ø17
Circular connectors M23, Signal, Inserts, Marking in opposite direction, Crimp termination Please order crimp contacts separately. 12x 1 mm	0.08 1.5	09 15 112 3011	09 15 112 3111		



Number of contacts

12

Solder termination

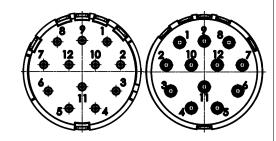

## Technical characteristics

Number of contacts Rated current 8 A 200 V Rated voltage Rated impulse voltage 2.5 kV Pollution degree >10<sup>10</sup> Ω Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles Conductor cross-section 1 mm<sup>2</sup> max. Material (insert) Polyamide (PA) Colour (insert) White

#### Technical characteristics

Material (contacts) Copper alloy
Surface (contacts) Gold plated
Material flammability class acc. V-0


to UL 94

RoHS compliant with exemption,

compliant


# Specifications and approvals

UL 1977 ECBT2.E235076

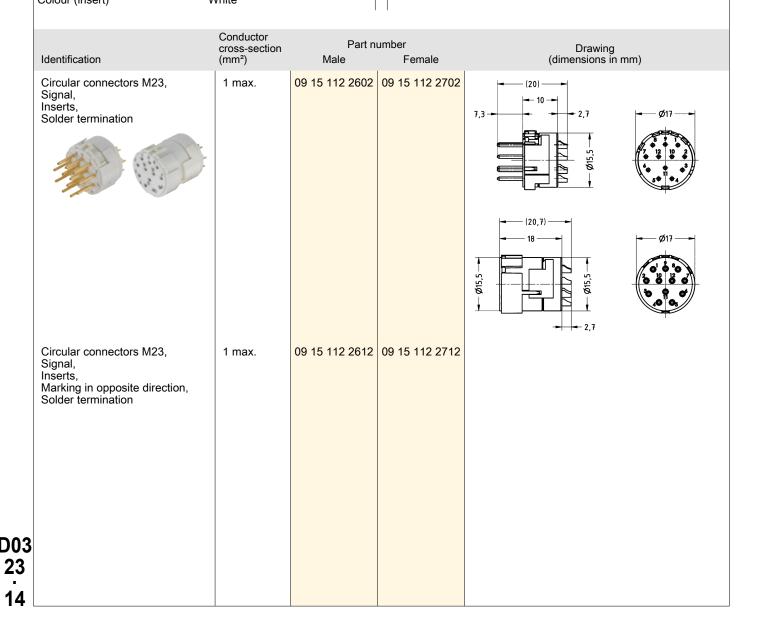

M23

PCB solder termination

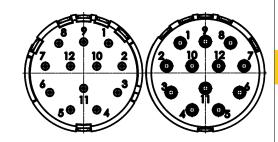

#### Technical characteristics

Number of contacts 8 A Rated current 200 V Rated voltage Rated impulse voltage 2.5 kV Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles

Material (insert) Polyamide (PA)

Colour (insert) White

## Technical characteristics


Material (contacts) Copper alloy Gold plated Surface (contacts)

Material flammability class acc.

to UL 94

RoHS compliant with exemption

## Specifications and approvals

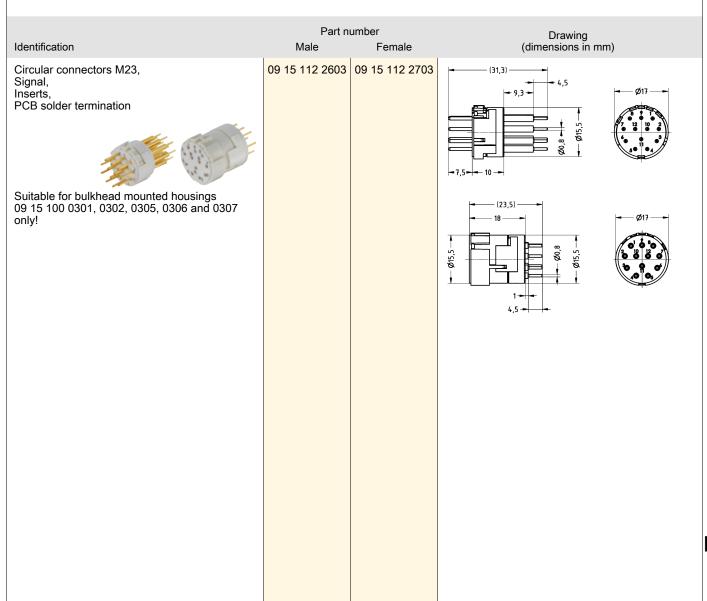




Number of contacts

17

Crimp termination

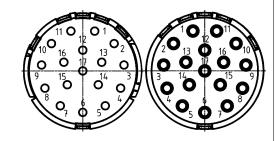

## Technical characteristics

Conductor cross-section 0.08 ... 1.5 mm²
Material (insert) Polyamide (PA)

## Technical characteristics

Colour (insert) White Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

# Specifications and approvals

UL 1977 ECBT2.E235076

	,	·	·	
Identification	Conductor cross-section (mm²)	Part number Drawi Male Female (dimensions		Drawing (dimensions in mm)
Circular connectors M23, Signal, Inserts, Crimp termination	0.08 1.5	09 15 117 3001	09 15 117 3101	917 917 917 918 918 919 919 919 919 919 919
separately. 17x 1 mm				19,6 Ø17 Ø17 Ø Ø Ø Ø Ø Ø Ø Ø Ø Ø Ø Ø Ø Ø Ø Ø

M23


D03 23

# HARTING

Number of contacts

17

Solder termination

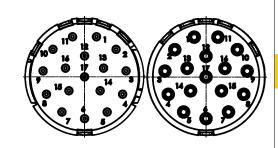

## Technical characteristics

Number of contacts 8 A Rated current Rated voltage 160 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>6</sup> Ω Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles 1 mm² max. Conductor cross-section Material (insert) Polyamide (PA) Colour (insert) White

## Technical characteristics

Material (contacts)

Surface (contacts)

Gold plated

Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

# Specifications and approvals


Identification	Conductor cross-section (mm²)	Part number Male Female		Drawing (dimensions in mm)	
Circular connectors M23, Signal, Inserts, Solder termination	1 max.	ı	09 15 117 2702	(20)	Ø17  Ø17  Ø17  Ø17  Ø17  Ø17  Ø17  Ø17



Number of contacts

17

PCB solder termination

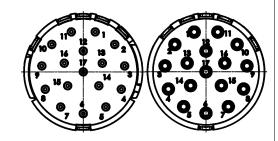

#### Technical characteristics

 Number of contacts
 17

 Rated current
 8 A

 Rated voltage
 160 V

 Rated impulse voltage
 1.5 kV

 Pollution degree
 3

 Insulation resistance
 >106 Ω

 Limiting temperature
 -40 ... +125 °C

 Mating cycles
 ≥500

Material (insert) Polyamide (PA)

Colour (insert) White

## Technical characteristics


Material (contacts) Copper alloy Surface (contacts) Gold plated Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

## Specifications and approvals


UL 1977 ECBT2.E235076

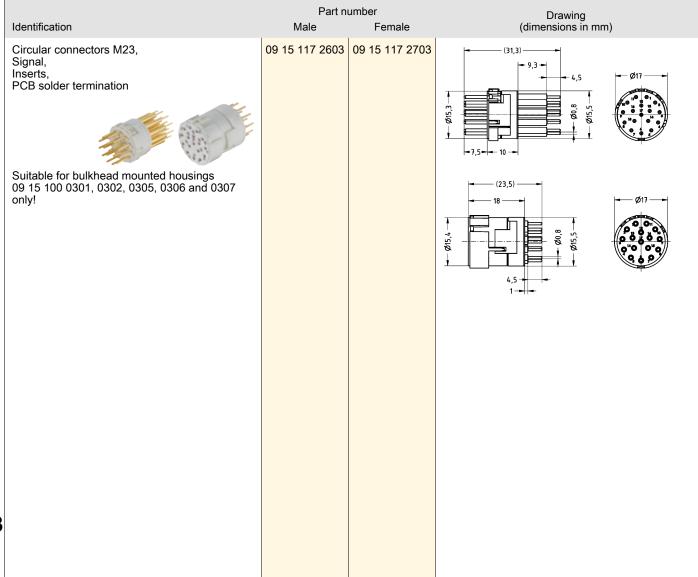

M23



+ 3 additional special contacts Crimp termination

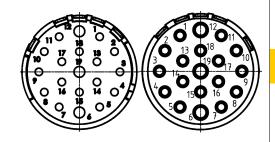

### Technical characteristics

Number of contacts

+ 3 additional special contacts Additional contacts

Rated current 8 A Rated voltage 100 V Rated impulse voltage 1.5 kV Pollution degree 3 Rated current (special contact) 10 A Rated voltage (special contact) 100 V Rated impulse voltage (special 1.5 kV contact) 3

Pollution degree (special

contact)

Insulation resistance

>10<sup>6</sup> Ω

### Technical characteristics

Limiting temperature -40 ... +125 °C

Mating cycles ≥500


Conductor cross-section 0.08 ... 1.5 mm<sup>2</sup> Material (insert) Polyamide (PA)

Colour (insert) White Material flammability class acc.

to UL 94

RoHS compliant with exemption

# Specifications and approvals

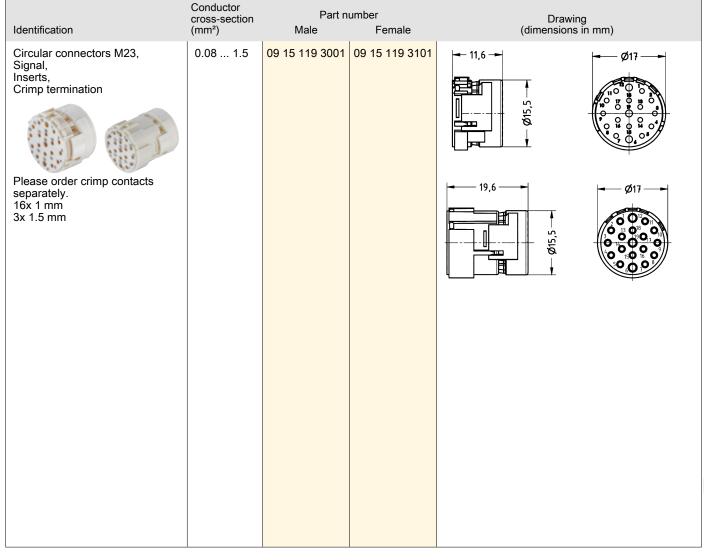


# M23 Signal inserts



Number of contacts

+ 3 additional special contacts Solder termination

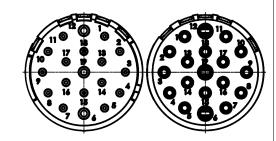

### Technical characteristics

Number of contacts

+ 3 additional special contacts Additional contacts

Rated current 8 A Rated voltage 100 V Rated impulse voltage 1.5 kV Pollution degree Rated current (special contact) 10 A Rated voltage (special contact) 100 V Rated impulse voltage (special 1.5 kV contact)

Pollution degree (special

contact)

Insulation resistance >10<sup>6</sup> Ω Limiting temperature -40 ... +125 °C

### Technical characteristics

Mating cycles ≥500 Conductor cross-section 1 mm² max. Polyamide (PA) Material (insert) Colour (insert) White Material (contacts) Copper alloy Gold plated


Surface (contacts) Material flammability class acc.

to UL 94

RoHS compliant with exemption

# Specifications and approvals


UL 1977 ECBT2.E235076

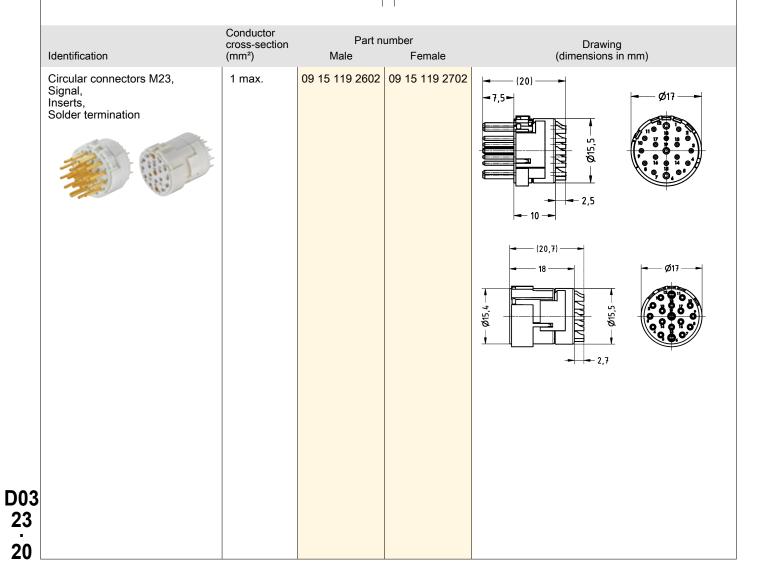

M23



+ 3 additional special contacts PCB solder termination

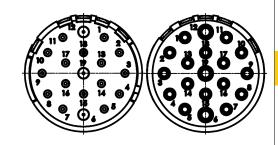

### Technical characteristics

Number of contacts

+ 3 additional special contacts Additional contacts

Rated current 8 A Rated voltage 100 V Rated impulse voltage 1.5 kV Pollution degree 3 Rated current (special contact) 10 A Rated voltage (special contact) 100 V Rated impulse voltage (special 1.5 kV

contact)

Pollution degree (special 3

contact)

Insulation resistance >10<sup>6</sup> Ω Limiting temperature -40 ... +125 °C

### Technical characteristics

Mating cycles

Material (insert) Polyamide (PA)

Colour (insert) White Material (contacts) Copper alloy Surface (contacts) Gold plated

Material flammability class acc.

to UL 94

RoHS compliant with exemption

# Specifications and approvals

UL 1977 ECBT2.E235076

### Part number Drawing Identification (dimensions in mm) Male Female

Circular connectors M23, Signal,


Inserts,

PCB solder termination




Suitable for bulkhead mounted housings 09 15 100 0301, 0302, 0305, 0306 and 0307 only!

09 15 119 2603 09 15 119 2703









M23

### **Technical characteristics**

 $\begin{array}{lll} \text{Contact resistance} & \leq 3 \ \text{m}\Omega \\ \text{Conductor cross-section} & 0.08 \dots 0.56 \ \text{mm}^2, \, 0.14 \dots 1 \ \text{mm}^2, \\ 0.75 \dots 1.5 \ \text{mm}^2, \, 0.75 \dots 2.5 \ \text{mm}^2, \\ 0.34 \dots 1 \ \text{mm}^2, \, 0.14 \dots 0.56 \ \text{mm}^2, \\ 0.56 \dots 1 \ \text{mm}^2 \\ \text{Conductor cross-section} & AWG 28 \dots AWG 20, \\ AWG 28 \dots AWG 17, \\ AWG 19 \dots AWG 16, \\ AWG 19 \dots AWG 17, \\ AWG 22 \dots AWG 17, \\ AWG 26 \dots AWG 20, \\ AWG 20 \dots AWG 17 \\ \end{array}$ 


### Technical characteristics

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

### Specifications and approvals

EN 60664-1 IEC 61984

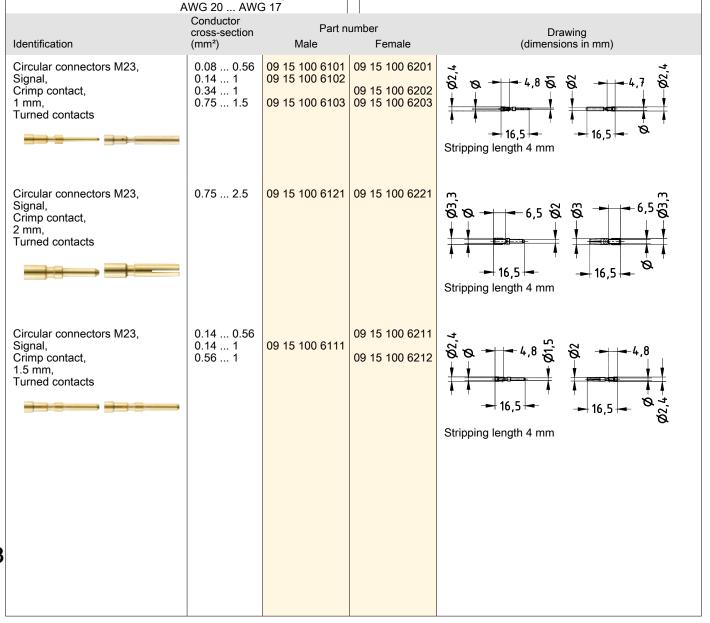



### Technical characteristics

Limiting temperature -40 ... +125 °C
Locking type Screw locking,
ComLock rapid locking

Degree of protection acc. to IEC IP67, in locked position, IP69 / IPX9K acc. to ISO 20653

Material (hood/housing) Copper-zinc alloy Surface (hood/housing) Nickel plated

Material (seal) NBR


### Technical characteristics

Colour (seal) Bla

RoHS compliant with exemption,

compliant

# Specifications and approvals

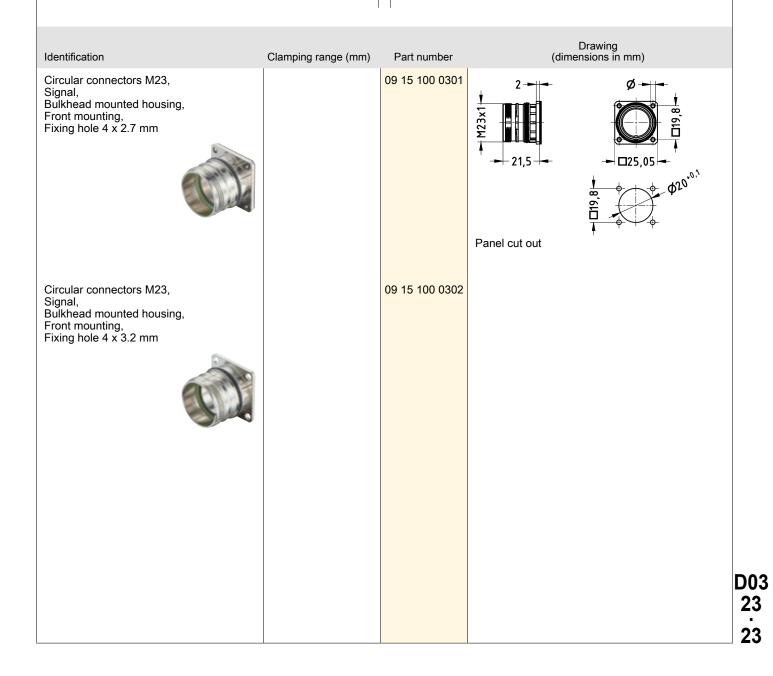



Drawing (dimensions in mm) Identification Part number Clamping range (mm) 09 15 100 0901 Circular connectors M23, Bulkhead mounted housing, Front mounting, Angled, Fixing hole 4 x 2.7 mm Panel cut out 09 15 100 0902 Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Angled, Rotatable, Fixing hole 4 x 2.7 mm Panel cut out Circular connectors M23, 09 15 100 0363 Signal, Bulkhead mounted housing, Front mounting, Thread M20 x 1.5 Ø20,2 Panel cut out for male inserts Not compatible to ComLock 09 15 100 0364 Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Thread Pg 13.5 for male inserts Not compatible to ComLock Ø20,6 Panel cut out

M23

Drawing (dimensions in mm) Identification Clamping range (mm) Part number 09 15 100 0373 Circular connectors M23, Signal, Bulkhead mounted housing, Front mounting, Thread M20 x 1.5 Ø20,2 for female inserts Panel cut out Not compatible to ComLock Circular connectors M23, 09 15 100 0374 Signal, Bulkhead mounted housing, Front mounting, Thread Pg 13.5 for female inserts Not compatible to ComLock Ø20,6 Panel cut out Circular connectors M23, 09 15 100 0307 Signal,
Bulkhead mounted housing, Rear mounting, Fixing hole 4 x 2.7 mm □25 22.5 Panel cut out 09 15 100 0305 Circular connectors M23, Signal, Bulkhead mounted housing, Rear mounting, Thread 4 x M2.5 22,5 **25 Ø**23 **D03** Panel cut out

25



		Part number	(dimensions in mm)
Circular connectors M23, Signal, Bulkhead mounted housing, Rear mounting, Thread 4 x M3		09 15 100 0306	
Circular connectors M23, Signal, Bulkhead mounted housing, Rear mounting, Thread M25 x 1.5		09 15 100 0308	3,5 SW29 SW30 SW29 SW30 3,5 10,5 29,5 Panel cut out
Circular connectors M23, Signal, Panel feed through housing, Rear mounting	3 7 7 12 11 17	09 15 100 0309 09 15 100 0310 09 15 100 0311	(approx. 67)  -26  -27  -28  -28  -28  -28  -28  -28  -28
Circular connectors M23, Signal, Cover, for hoods, With chain (100 mm)  Not compatible to ComLock		09 15 100 9103	(20,7) 13,5 18
	Signal, Bulkhead mounted housing, Rear mounting, Thread 4 x M3  Circular connectors M23, Signal, Bulkhead mounted housing, Rear mounting, Thread M25 x 1.5  Not compatible to ComLock  Circular connectors M23, Signal, Panel feed through housing, Rear mounting  Circular connectors M23, Signal, Cover, for hoods, With chain (100 mm)	Signal, Bulkhead mounted housing, Rear mounting, Thread 4 x M3  Circular connectors M23, Signal, Bulkhead mounted housing, Rear mounting, Thread M25 x 1.5  Not compatible to ComLock  Circular connectors M23, Signal, Panel feed through housing, Rear mounting  Circular connectors M23, Signal, Panel feed through housing, Rear mounting  Circular connectors M23, Signal, Cover, for hoods, With chain (100 mm)	Signal, Bulkhead mounted housing, Rear mounting, Thread 4 x M3  Circular connectors M23, Signal, Bulkhead mounted housing, Rear mounting, Thread M25 x 1.5  Not compatible to ComLock  Circular connectors M23, Signal, Panel feed through housing, Rear mounting  Circular connectors M23, Signal, Op 15 100 0311  Circular connectors M23, Signal, Control of the control of




Drawing (dimensions in mm) Identification Clamping range (mm) Part number 09 15 100 9101 Circular connectors M23, Signal,
Cover,
for bulkhead mounted housings,
for cable to cable housing Circular connectors M23, Signal, Cover, for bulkhead mounted housings, for cable to cable housing, With chain (70 mm) 09 15 100 9102 (14,7) D03

M23

# M23 Power inserts




Number of contacts



Crimp termination

Material (insert)

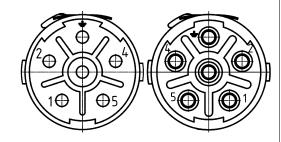

### Technical characteristics

Number of contacts 28 A Rated current Rated voltage 600 V Rated impulse voltage 4 kV Pollution degree  $>10^{13} \Omega$ Insulation resistance -40 ... +125 °C Limiting temperature ≥500 Mating cycles Conductor cross-section 0.14 ... 4 mm²

Polyamide (PA)

# Technical characteristics

Colour (insert) Blue Material flammability class acc. V-0 to UL 94

RoHS


compliant

# Specifications and approvals

	Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Dra (dimensio	awing ons in mm)
	Circular connectors M23, Power, Inserts, Crimp termination	0.14 4	09 15 606 3001	09 15 606 3101	Ø21 	30,2
	Please order crimp contacts separately. 6x 2 mm				Ø21	30,2
3						



+ 4 additional signal contacts Crimp termination

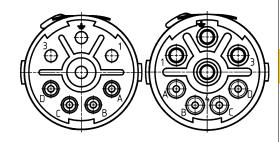

### Technical characteristics

Number of contacts

+ 4 additional signal contacts Additional contacts

Rated current 28 A Rated voltage 600 V Rated impulse voltage 4 kV Pollution degree 3 Rated current (signal) 8 A 300 V Rated voltage (signal) Rated impulse voltage (signal) 2.5 kV Pollution degree (signal)  $>10^{13} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C

### Technical characteristics

Mating cycles ≥500


Conductor cross-section 0.14 ... 4 mm<sup>2</sup> Material (insert) Polyamide (PA)

Colour (insert) Blue V-0

Material flammability class acc. to UL 94

RoHS compliant

# Specifications and approvals

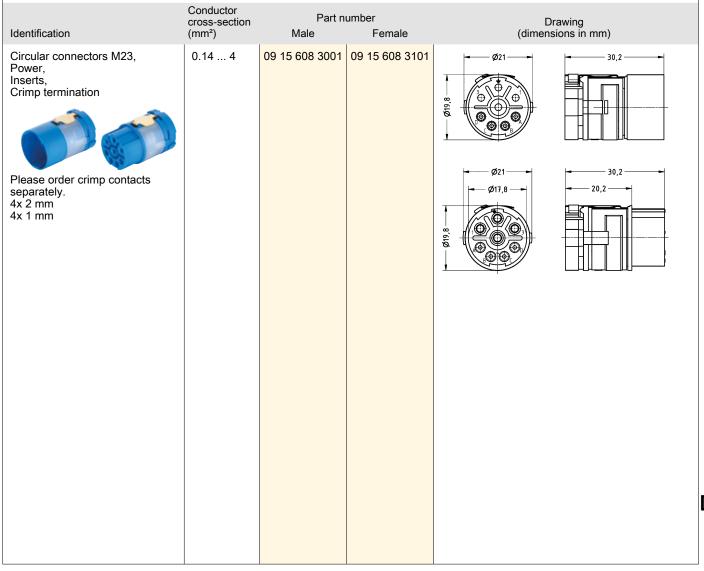

# M23 Power inserts




Number of contacts

3+



+ 5 additional signal contacts Crimp termination

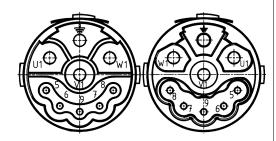

### Technical characteristics

Number of contacts

Additional contacts + 5 additional signal contacts

Rated current 28 A Rated voltage 630 V Rated impulse voltage 4 kV Pollution degree 3 Rated current (signal) 10 A 250 V Rated voltage (signal) Rated impulse voltage (signal) 2.5 kV Pollution degree (signal)  $>10^{13} \Omega$ Insulation resistance

Insulation resistance  $>10^{13} \Omega$ Limiting temperature  $-40 \dots +125 ^{\circ}$ C


### Technical characteristics

Mating cycles ≥500
Conductor cross-section 0.14 ... 4 mm²
Material (insert) Polyamide (PA)

Colour (insert) Blue Material flammability class acc. V-0 to UL 94

RoHS compliant


# Specifications and approvals

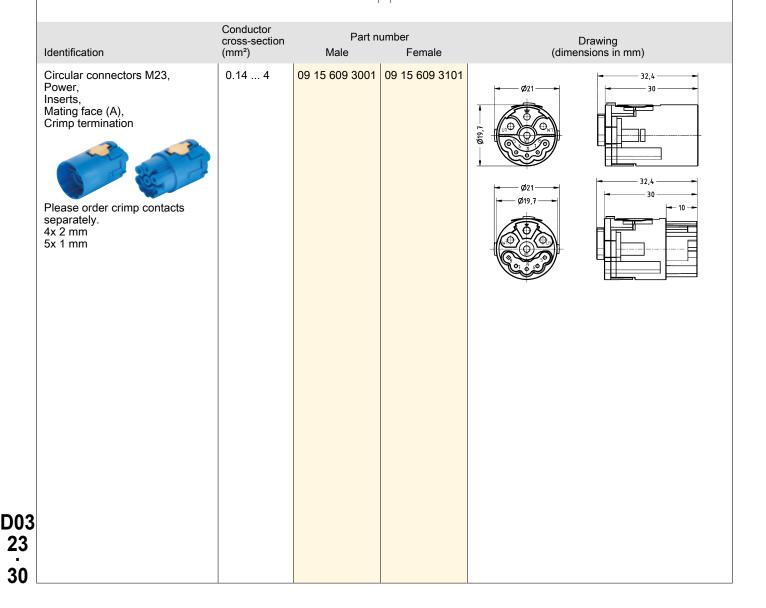



3+ 😩

+ 5 additional signal contacts Crimp termination

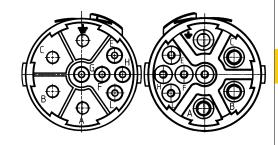

### Technical characteristics

Number of contacts 3

Additional contacts + 5 additional signal contacts

Rated current 28 A Rated voltage 630 V Rated impulse voltage 4 kV Pollution degree 3 Rated current (signal) 10 A Rated voltage (signal) 250 V Rated impulse voltage (signal) 2.5 kV Pollution degree (signal)  $>10^{13} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C

### Technical characteristics

Mating cycles ≥500


Conductor cross-section 0.14 ... 4 mm<sup>2</sup>
Material (insert) Polyamide (PA)

Colour (insert) Blue Material flammability class acc. V-0

to UL 94

RoHS compliant

# Specifications and approvals

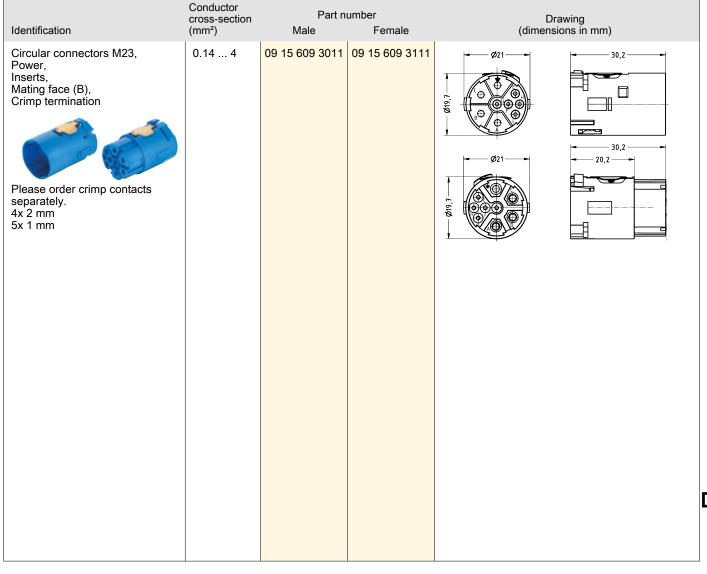

### M23 Power inserts



Number of contacts

Pollution degree (signal)

Rated impulse voltage (data)


Rated current (data)

Rated voltage (data)

3+



+ 4 additional signal contacts + 4 Data Crimp termination

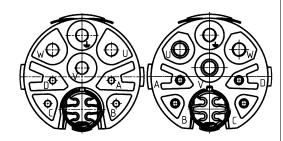

### Technical characteristics

Number of contacts Additional contacts + 4 additional signal contacts, + 4 Data Rated current 28 A 630 V Rated voltage Rated impulse voltage 4 kV 3 Pollution degree Rated current (signal) 8 A Rated voltage (signal) 300 V 2.5 kV Rated impulse voltage (signal)

3

2 A

60 V

0.5 kV

### Technical characteristics

Pollution degree (data) 3

Limiting temperature -40 ... +125 °C Mating cycles ≥500


Conductor cross-section 0.08 ... 4 mm<sup>2</sup>
Material (insert) Polyamide (PA)

Colour (insert) Blue

Material flammability class acc. to UL 94

RoHS compliant

# Specifications and approvals

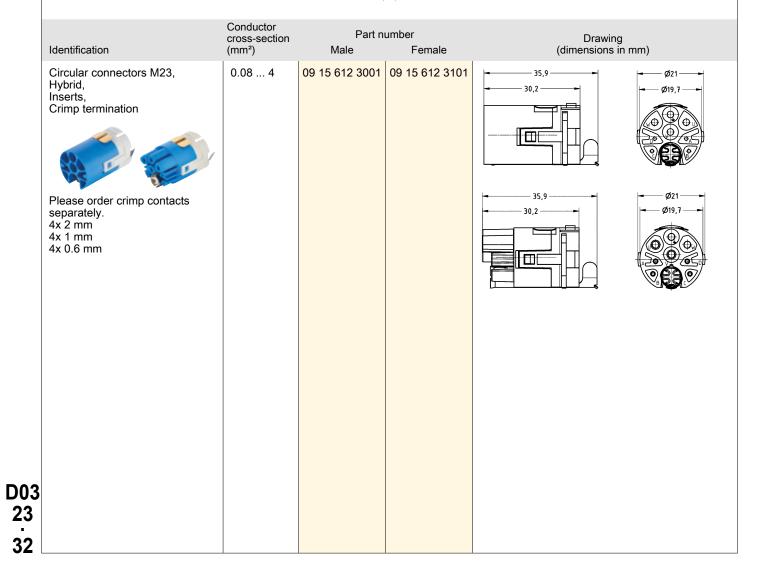

# Technical characteristics

Contact resistance

Conductor cross-section

Material (contacts) Surface (contacts) RoHS

≤3 mΩ

0.08 ... 0.34 mm², 0.14 ... 1 mm², 0.75 ... 2.5 mm², 2.5 ... 4 mm²

Copper alloy

Gold plated compliant, compliant with exemption

# Specifications and approvals

EN 60664-1 IEC 61984

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M23, Power, Crimp contact, 0.6 mm, Turned contacts	0.08 0.34	09 15 600 6191	09 15 600 6291	4,5 % 4,5 % 4,5 % Stripping length 4 mm
Circular connectors M23, Power, Crimp contact, 1 mm, Turned contacts	0.14 1	09 15 600 6101	09 15 600 6201	Stripping length 4 mm
Circular connectors M23, Power, Crimp contact, 2 mm, Turned contacts	0.75 2.5 2.5 4	09 15 600 6121 09 15 600 6122	09 15 600 6221 09 15 600 6222	7,8 % 7,8 %

M23

### Technical characteristics

Limiting temperature -40 ... +125 °C Locking type Screw locking,

ComLock rapid locking

Degree of protection acc. to IEC IP67 / IP69 / IPX9K acc. to 60529 ISO 20653, in locked position

Material (hood/housing) Copper-zinc alloy Surface (hood/housing) Nickel plated

Material (seal) NBR


### Technical characteristics

Colour (seal) Black

RoHS compliant, compliant with

exemption

# Specifications and approvals

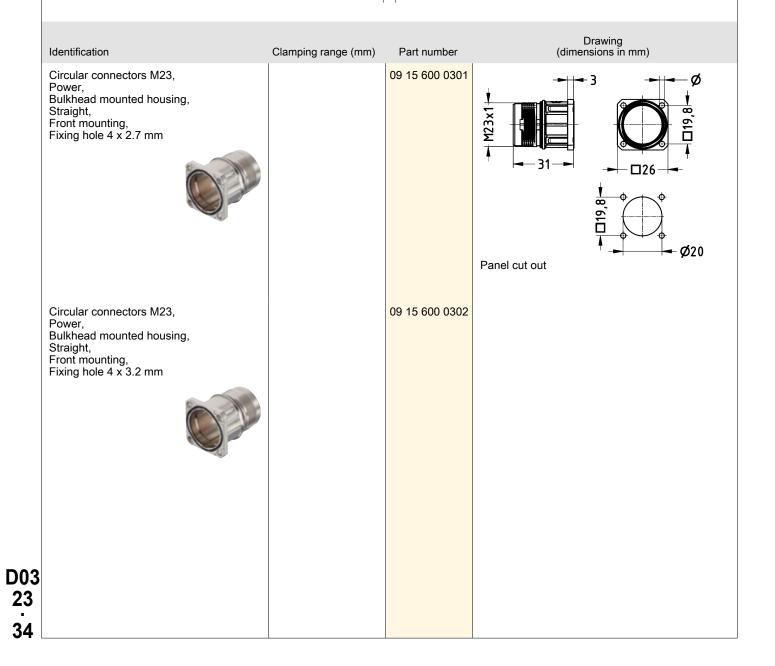

# M23 Power Hoods/Housings



Drawing (dimensions in mm) Identification Clamping range (mm) Part number 09 15 600 0303 Circular connectors M23, - 39 Power, Bulkhead mounted housing, Straight, Front mounting, Thread M20 x 1.5 Not compatible to ComLock Ø20,2 Panel cut out 09 15 600 0313 Circular connectors M23, **-** 30,5 Power, Bulkhead mounted housing, Ø31**→** Straight, Front mounting, Thread M25 x 1.5 Ø25 Panel cut out Circular connectors M23, 09 15 600 0308 -37,3Power, - 33,8 Bulkhead mounted housing, Ø32,9+ Straight, Rear mounting, Thread M25 x 1.5 Ø25 Panel cut out

M23

**D03** 

# M23 Power Hoods/Housings



Drawing (dimensions in mm) Identification Clamping range (mm) Part number 09 15 600 0902 Circular connectors M23, Bulkhead mounted housing, Angled, Rotatable, Fixing hole 4 x 2.7 mm Ø20 Panel cut out Circular connectors M23, 09 15 600 0912 Power, Bulkhead mounted housing, Angled, Rotatable, Fixing hole 4 x 3.2 mm Ø20 Panel cut out 09 15 600 0310 Circular connectors M23, 7 ... 12 (approx. 72) 11 ... 17 09 15 600 0311 Panel feed through housing, Rear mounting, EMC version - **Ø**25 Panel cut out 09 15 600 9103 Circular connectors M23, Power, Cover, for hoods, With chain (100 mm) Not compatible to ComLock 36

**D03** 

M23

# M23 Power Hoods/Housings



Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)	
Circular connectors M23, Power, Cover, for bulkhead mounted housings, for cable to cable housing, With chain (70 mm)	Jampang tangs (timiy	09 15 600 9102		M23
With chain (70 mm)			(14,7)	
				Dua
				D03 23  37


7/8" HARAX®	HARTING	
Contents	Page	
Panel feed through	D03 35.2	
		DΛ

D03 35 . 1





**Jnshielded** 



### Technical characteristics

Number of contacts 10 A Rated current 230 V Rated voltage conductor-earth Rated voltage conductor-con-400 V ductor 4.8 kV Rated impulse voltage Pollution degree 3 Insulation resistance >108 Ω Contact resistance ≤10 mΩ ≥100 Mating cycles Locking type Screw locking Conductor length 50 cm

Degree of protection acc. to IEC IP67

60529

### Technical characteristics

Conductor cross-section 1 mm<sup>2</sup>
Conductor cross-section AWG 18

Material (insert) Thermoplastic polyurethane

(TPU)

Material (hood/housing) Copper-zinc alloy

Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

(€


	Identification	Conductor cross-section (mm²)	Part number Female	Drawing (dimensions in mm)
ľ	Circular connectors 7/8", Panel feed through, With conductors, for front mounting, Unshielded	1	21 04 316 2301	Panel cut out
3				



Number of contacts

4

Unshielded



### Technical characteristics

Number of contacts Rated current 10 A 230 V Rated voltage conductor-earth Rated voltage conductor-con-400 V ductor 4.8 kV Rated impulse voltage Pollution degree 3 Insulation resistance >108 Ω Contact resistance ≤10 mΩ

Mating cycles ≥100
Locking type Screw locking
Conductor length 50 cm

Degree of protection acc. to IEC IP67

60529

# Technical characteristics

Conductor cross-section 1 mm²
Conductor cross-section AWG 18

Material (insert) Thermoplastic polyurethane

(TPU)

Material (hood/housing) Copper-zinc alloy

Material (contacts) Brass
Surface (contacts) Gold plated


RoHS compliant with exemption

# Specifications and approvals

 $\epsilon$ 


Identification  Conductor cross-section (mm²)  Circular connectors 7/8°, Panel feed through, With conductors, for front mounting, Unshielded  1  21 04 316 2401  Panel cut out
Panel feed through, With conductors, for front mounting, Unshielded





Unshielded

60529

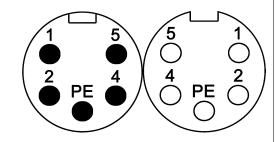

### Technical characteristics

Number of contacts 10 A Rated current 230 V Rated voltage conductor-earth Rated voltage conductor-con-400 V ductor 4.8 kV Rated impulse voltage Pollution degree 3 Insulation resistance >108 Ω Contact resistance ≤10 mΩ ≥100 Mating cycles Locking type Screw locking Conductor length 50 cm Degree of protection acc. to IEC IP67

# Technical characteristics

Conductor cross-section 1 mm²
Conductor cross-section AWG 18
Material (insert) Thermoplastic polyurethane

(TPU) Copper-zinc alloy

Material (hood/housing) Copper-zi Material (contacts) Brass

Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

 $\epsilon$ 

	Identification	Conductor cross section (mm²)	Part num Male	ber Female	Drawing (dimensions in mm)
	Circular connectors 7/8", Panel feed through, With conductors, for front mounting, Unshielded	section (mm²)	21 34 740 0571 005		Panel cut out  (aimensions in mm)  1/8
3					

# HARAX® panel feed through



Contents	Page
Panel feed through	D03 50.2
Accessories	D03 50.6

D03 50 1



Number of contacts

Number of contacts



HARAX



HARAX® connection technology Unshielded



### Technical characteristics

Rated current 16 A 230 V Rated voltage conductor-earth Rated voltage conductor-con-400 V ductor Rated impulse voltage 4 kV Pollution degree 3 Insulation resistance >108 Ω Contact resistance ≤10 mΩ ≤2.8 mm Wire outer diameter Conductor length 50 cm Degree of protection acc. to IEC IP67

60529

Conductor cross-section 0.75 ... 1.5 mm<sup>2</sup> Conductor cross-section AWG 18 ... AWG 16

### Technical characteristics

Cable diameter 6 ... 9 mm

Polyamide (PA), Thermoplastic polyurethane (TPU) Material (insert)

Material (hood/housing) Polyamide (PA), Thermoplastic polyurethane (TPU)

Material (contacts) Copper alloy Surface (contacts) Gold plated RoHS compliant

# Specifications and approvals

UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079

Identifica	ation	Conductor cross-section (mm²)	Size	Part number	Drawing (dimensions in mm)
With fas	eed through, ston blades, mounting, ® connection technology,	0.75 1.5	Pg 13.5	21 01 130 3013	Gesantlänge im verschraubten Zustand co. 49.6mm Complete length when assembled app. 49.6mm  SW24  Contact arrangement (view from mating side)
With sol	eed through, lder termination, mounting, ® connection technology,	0.75 1.5	Pg 13.5	21 01 130 3023	
With cor	ed through, nductors, mounting, ® connection technology,	0.75 1.5	Pg 13.5	21 01 130 3233	
3					



Number of contacts

Number of contacts

HARAX® connection technology Unshielded





HARAX

### Technical characteristics

3

Rated current 16 A 230 V Rated voltage conductor-earth Rated voltage conductor-con-400 V ductor Rated impulse voltage 4 kV Pollution degree 3 Insulation resistance >108 Ω Contact resistance ≤10 mΩ ≤2.8 mm Wire outer diameter Conductor length 50 cm Degree of protection acc. to IEC IP67

60529

Conductor cross-section 0.75 ... 1.5 mm<sup>2</sup> AWG 18 ... AWG 16 Conductor cross-section

### Technical characteristics

Cable diameter 6 ... 9 mm

Polyamide (PA), Thermoplastic polyurethane (TPU) Material (insert)

Material (hood/housing) Polyamide (PA), Thermoplastic

polyurethane (TPU)

Material (contacts) Copper alloy Surface (contacts) Gold plated RoHS compliant

# Specifications and approvals


UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm²)	Size	Part number	Drawing (dimensions in mm)
HARAX®, Panel feed through, With faston blades, for front mounting, HARAX® connection technology, Unshielded	0.75 1.5	Pg 13.5	21 01 130 1013	Gesamt länge im verschraubten Zustand. co. 49.6mm Camplete length when assembled app. 49.6mm  SW24  Contact arrangement (view from mating side)
HARAX®, Panel feed through, With solder termination, for front mounting, HARAX® connection technology, Unshielded	0.75 1.5	Pg 13.5	21 01 130 1023	
HARAX®, Panel feed through, With conductors, for front mounting, HARAX® connection technology, Unshielded	0.75 1.5	Pg 13.5	21 01 130 1223	



Number of contacts



HARAX® connection technology Unshielded



polyurethane (TPU)

### Technical characteristics

Number of contacts Rated current 16 A 230 V Rated voltage conductor-earth Rated voltage conductor-con-400 V ductor Rated impulse voltage 4 kV Pollution degree 3 Insulation resistance >108 Ω Contact resistance ≤10 mΩ ≤2.8 mm Wire outer diameter Conductor length 50 cm Degree of protection acc. to IEC IP67

60529

Conductor cross-section 0.75 ... 1.5 mm<sup>2</sup>
Conductor cross-section AWG 18 ... AWG 16

### Technical characteristics

Cable diameter 6 ... 9 mm

Material (insert)

Polyamide (PA), Thermoplastic polyurethane (TPU)

Material (hood/housing) Polyamide (PA), Thermoplastic

Material (contacts) Copper alloy Surface (contacts) Gold plated RoHS compliant

# Specifications and approvals

UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079

Id	lentification	Conductor cross-section (mm²)	Size	Part number	Drawing (dimensions in mm)
P W fo	JARAX®, tanel feed through, with solder termination, or front mounting, JARAX® connection technology, inshielded	0.75 1.5 0.75 1.5	M20 Pg 13.5	21 01 141 3023 21 01 140 3023	Complete length when assembled app. 46,2mm  Complete length when assembled app. 46,2mm  Contact arrangement (view from mating side)
P W fo	JARAX®, lanel feed through, vith conductors, or front mounting, JARAX® connection technology, Inshielded	0.75 1.5	M20	21 01 141 3333	
3					

HARAX



Number of contacts

Number of contacts

HARAX® connection technology Unshielded





HARAX

### Technical characteristics

Rated current 16 A 230 V Rated voltage conductor-earth Rated voltage conductor-con-400 V ductor Rated impulse voltage 4 kV Pollution degree 3 Insulation resistance >108 Ω Contact resistance ≤10 mΩ ≤2.8 mm Wire outer diameter Conductor length 50 cm Degree of protection acc. to IEC IP67

60529

0.75 ... 1.5 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 18 ... AWG 16

### Technical characteristics

Cable diameter 6 ... 9 mm

Polyamide (PA), Thermoplastic polyurethane (TPU) Material (insert)

Polyamide (PA), Thermoplastic Material (hood/housing)

polyurethane (TPU)

Material (contacts) Copper alloy Surface (contacts) Gold plated RoHS compliant

# Specifications and approvals

UL 1977 ECBT2.E102079 CSA-C22.2 No. 182.3 ECBT8.E102079

Identification		Conductor cross-section (mm²)	Size	Part number	Drawing (dimensions in mm)
HARAX®, Panel feed thro With solder ter for front mount HARAX® conn Unshielded	mination,	0.75 1.5 0.75 1.5	M20 Pg 13.5	21 01 141 1023 21 01 140 1023	Complete length when ossembled app. 18,2mm  Complete length when ossembled app. 18,2mm  Light SM24  Contact arrangement (view from mating side)
HARAX®, Panel feed throwith conductor for front mount HARAX® conn Unshielded	rs,	0.75 1.5 0.75 1.5	M20 Pg 13.5	21 01 141 1323 21 01 140 1323	

HARAX

# Technical characteristics

RoHS

compliant with exemption, compliant

Identification	Size	Part number	Drawir (dimensions	ng in mm)
HARAX®, Lock nut, Thermoplastic	M20 Pg 13.5	21 01 000 0009 21 01 000 0007	width across flats 24 SW24  M20x1,5	5
			width across flats 27 SW27 Pg13,5	5
HARAX®, Lock nut, Metal	Pg 13.5	21 01 000 0039	width across flats 24 SW24	5



Contents Page C03 08.2 Accessories ..... C03 08.11


M8

C03 08 1



3

HARAX® connection technology Unshielded



### Technical characteristics

Number of contacts 2 A Rated current 32 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles Wire outer diameter ≤1 mm Screw locking Locking type

Degree of protection acc. to IEC IP67, in locked position

60529

Conductor cross-section 0.1 ... 0.14 mm<sup>2</sup>

### Technical characteristics

Conductor cross-section AWG 27 ... AWG 26
Cable diameter 1.9 ... 3.5 mm
Tightening torque 0.4 Nm

Material (insert) Polyamide (PA)

Material (hood/housing) Polyamide (PA), Zinc die-cast Material (contacts) Copper alloy

Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals


IEC 61076-2-104

Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
Circular connectors M8, M8-XS, Cable connector, Straight, HARAX® connection technology, Unshielded	0.1 0.14	21 02 159 1305	Gesantlänge in verschraubten Zustand ca. 40,8mm Complete length when assembled app. 40,8mm width across flats 9
3			

M8

Number of contacts

HARAX® connection technology Unshielded

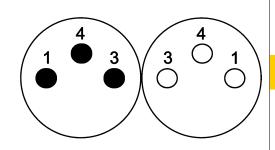

### Technical characteristics

Number of contacts 4 A Rated current Rated voltage 32 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤1.6 mm Screw locking Locking type

Degree of protection acc. to IEC IP67, in locked position

60529

0.14 ... 0.34 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 26 ... AWG 22

### Technical characteristics

Cable diameter 2.5 ... 5.1 mm Tightening torque 0.4 Nm Material (insert) Polyamide (PA)

Material (hood/housing) Polyamide (PA), Zinc die-cast

Copper alloy Material (contacts) Surface (contacts) Gold plated RoHS compliant

# Specifications and approvals

IEC 61076-2-104 UL 1977 ECBT2.E102079


CSA-C22.2 No. 182.3 ECBT8.E102079

Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M8, M8-S, Cable connector, Straight, HARAX® connection technology, Unshielded	0.14 0.34	21 02 151 1305	21 02 151 2305	Gesamtlänge im verschraubten Zustand ca. 40,8mm/ complete length when assembled app. 40,8mm/ width across flats 9  Gesamtlänge im verschraubten Zustand co. 42,5mm/ complete length when assembled app. 42,5mm/ width across flats 9



3

Screw termination Unshielded

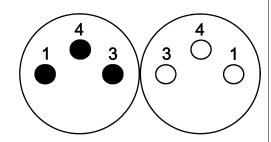

### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 3 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking

Degree of protection acc. to IEC IP67, in locked position

60529

Conductor cross-section 0.09 ... 0.5 mm<sup>2</sup>
Conductor cross-section AWG 28 ... AWG 20

### Technical characteristics

Cable diameter 4 ... 5.5 mm

Tightening torque 0.4 Nm

Material (insert) Polyamide (PA)

Material (hood/housing) Polyamide (PA),

Copper-zinc alloy

Material (contacts)

Surface (contacts)


Brass

Gold plated

RoHS compliant with exemption

# Specifications and approvals


IEC 61076-2-104

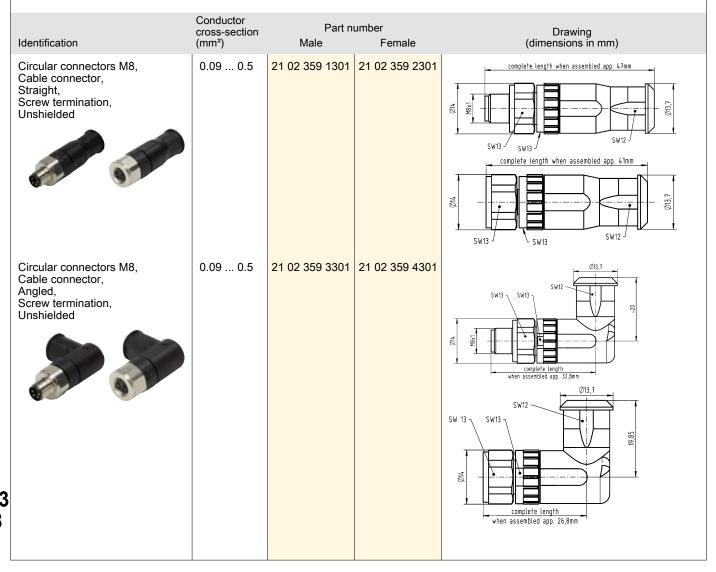

M8

Number of contacts

Screw termination Shielded

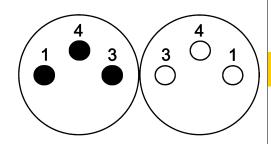

## Technical characteristics

Number of contacts 4 A Rated current Rated voltage 60 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Screw locking

Locking type

Degree of protection acc. to IEC IP67, in locked position

60529

Conductor cross-section 0.09 ... 0.5 mm<sup>2</sup> AWG 28 ... AWG 20 Conductor cross-section

# Technical characteristics

Cable diameter 4 ... 5.5 mm Tightening torque 0.4 Nm Material (insert) Polyamide (PA) Material (hood/housing) Copper-zinc alloy

Material (contacts) Brass Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals


IEC 61076-2-104

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M8, Cable connector, Straight, Screw termination, Shielded	0.09 0.5	21 02 369 1301	21 02 369 2301	complete length when assembled app. 47mm  SW13  SW13  SW13  SW13  SW13  SW13  SW13  SW13



4

HARAX® connection technology Unshielded

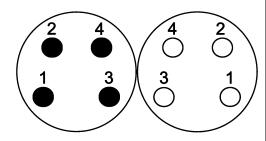

### Technical characteristics

Number of contacts Rated current 4 A Rated voltage 32 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤1.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP67, in locked position

60529

Conductor cross-section 0.14 ... 0.34 mm<sup>2</sup>
Conductor cross-section AWG 26 ... AWG 22

### Technical characteristics

Cable diameter 2.5 ... 5.1 mm
Tightening torque 0.4 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts)

Surface (contacts)

RoHS

Copper alloy

Gold plated

compliant

## Specifications and approvals

IEC 61076-2-104

UL 1977 ECBT2.E102079


CSA-C22.2 No. 182.3 ECBT8.E102079

# Identification Circular connectors M8, M8-S, Cable connector, Straight. HARAX® connection technology, Unshielded O.14 ... 0.34 21 02 151 1405 21 02 151 2405

M8

Number of contacts

Screw termination Unshielded

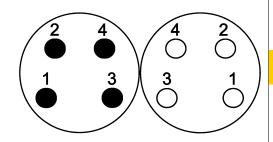

### Technical characteristics

Number of contacts 4 A Rated current Rated voltage 30 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking

Degree of protection acc. to IEC IP67, in locked position

60529

Conductor cross-section 0.09 ... 0.5 mm<sup>2</sup> AWG 28 ... AWG 20 Conductor cross-section

# Technical characteristics

Cable diameter 4 ... 5.5 mm Tightening torque 0.4 Nm Material (insert) Polyamide (PA) Material (hood/housing) Polyamide (PA), Copper-zinc alloy

Material (contacts) Brass Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

IEC 61076-2-104


Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M8, Cable connector, Straight, Screw termination, Unshielded	0.09 0.5	21 02 359 1401	21 02 359 2401	complete length when assembled app. 47mm  SW13 SW13 SW12 SW12  Complete length when assembled app. 41mm  SW13 SW13 SW13
Circular connectors M8, Cable connector, Angled, Screw termination, Unshielded	0.09 0.5	21 02 359 3401	21 02 359 4401	SW13 SW13 SW13 SW13 SW13 SW13 SW13 SW13

# A-coding



Number of contacts

Screw termination Shielded

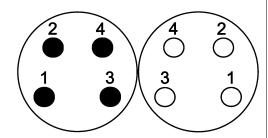

## Technical characteristics

Number of contacts 4 A Rated current Rated voltage 30 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance Mating cycles ≥100

60529

Conductor cross-section Conductor cross-section

≤10 mΩ Locking type Screw locking Degree of protection acc. to IEC IP67, in locked position

> 0.09 ... 0.5 mm<sup>2</sup> AWG 28 ... AWG 20

## Technical characteristics

Cable diameter 4 ... 5.5 mm Tightening torque 0.4 Nm Material (insert) Polyamide (PA) Material (hood/housing) Copper-zinc alloy

Material (contacts) **Brass** Surface (contacts) Gold plated

RoHS compliant with exemption


# Specifications and approvals

Identification	Conductor cross-section (mm²)	Part n	umber Female	Drawing (dimensions in mm)
Circular connectors M8, Cable connector, Straight, Screw termination, Shielded	0.09 0.5	21 02 369 1401	21 02 369 2401	complete length when assembled app. 47mm  SW13  SW13  SW13  SW13  SW13  SW13  SW13
3				

Number of contacts

4

HARAX® connection technology Shielded

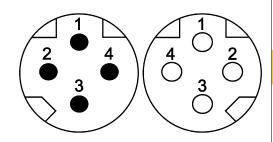

#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & > 10^8 \Omega \\ \text{Contact resistance} & \leq 10 \text{ m}\Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, in locked position

60529

Cable diameter 6.2 ... 6.8 mm

#### Technical characteristics


Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 0.4 Nm Material (insert) Polyamide (PA)

Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts) Copper alloy Surface (contacts) Gold plated


# Specifications and approvals

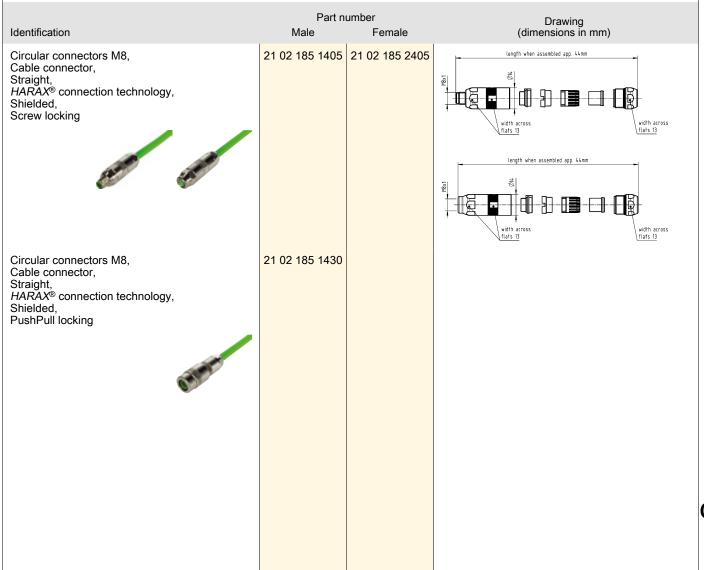



4

HARAX® connection technology Shielded

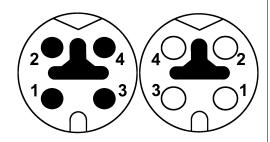

## Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 60 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking, PushPull
Degree of protection acc. to IEC IP65 / IP67, in locked position

60529

Cable diameter 6.2 ... 6.8 mm

#### Technical characteristics

Transmission characteristics Cat. 5, Class D up to 100 MHz


Tightening torque 0.4 Nm Material (insert) Polyamide (PA)

Material (insert) Polyamide (PA)
Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts) Copper alloy

Surface (contacts) Gold plated

# Specifications and approvals

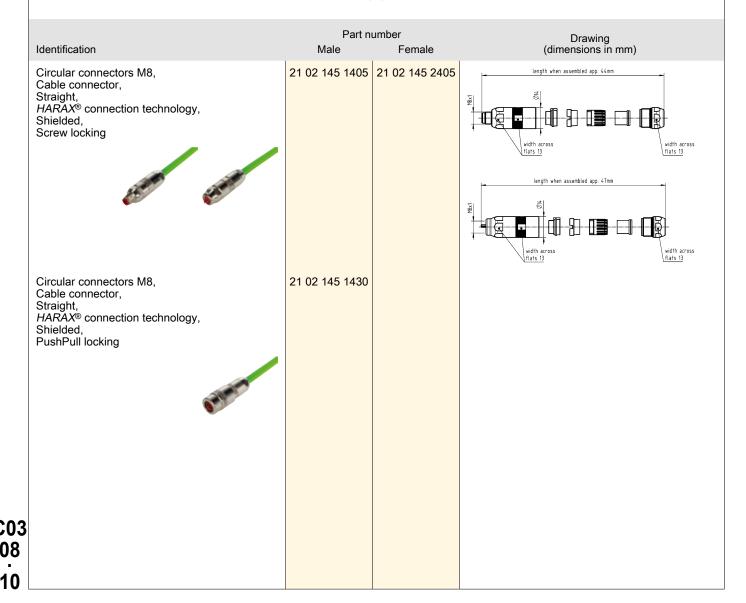

# Accessories




# Technical characteristics

Material (accessories)

Thermoplastic

# Technical characteristics

Colour (accessories) RoHS Black compliant

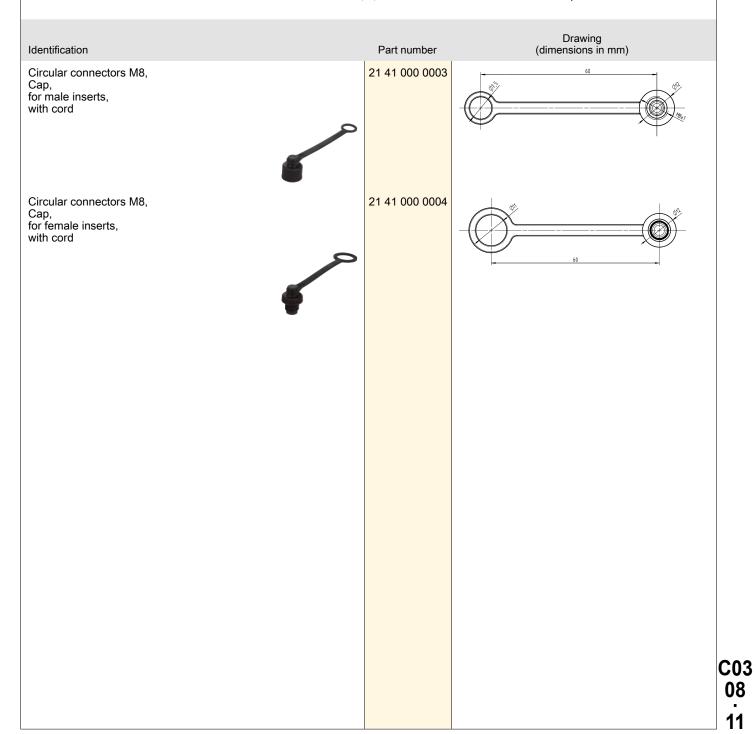

# Technical characteristics

Technical characteristics

Material (accessories)

Thermoplastic

Colour (accessories) RoHS Black, Grey, Transparent compliant

Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Circular connectors M8, M8-XS, Seal, Black	1.9 2.5	21 01 010 2016	
Circular connectors M8, M8-XS, Seal, Grey	2.5 3.5	21 01 010 2008	-12,4- 
Circular connectors M8, M8-XS, Seal, Transparent	4.2 5.4	21 01 010 2005	
Circular connectors M8, M8-S, Set of seals	2.5 5.1	21 01 010 2013	60 25-32 10 32-4,0 10 4,0 -5,1



Contents	Paga
	Page
M12	C03 12.2
preLink® M12	C03 12.32
M12 Slim Design	C03 12.40
M12 PushPull	C03 12.60
M12 Power	C03 12.74
Adapter	C03 12.82
Accessories	C03 12.87


.00

C03 12 1



3

HARAX® connection technology Unshielded

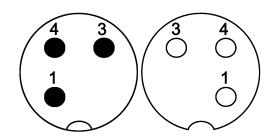

## Technical characteristics

Number of contacts Rated current 4 A Rated voltage 32 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤1.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.14 ... 0.34 mm²
Conductor cross-section AWG 26 ... AWG 22

#### Technical characteristics

Cable diameter 2.9 ... 5.1 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts)

Brass

Cold plated

Surface (contacts) Gold plated compliant

## Specifications and approvals

IEC 61076-2-101


UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

# Identification Conductor cross-section (mm²) Circular connectors M12, M12-S, Cable connector, Straight, HARAX® connection technology, Unshielded 21 03 111 1305 21 03 111 2305 Cable connection technology, Unshielded

Number of contacts

HARAX® connection technology Unshielded



#### Technical characteristics

Number of contacts 3 6 A Rated current Rated voltage 50 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤2.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

0.34 ... 0.75 mm<sup>2</sup> Conductor cross-section AWG 22 ... AWG 18 Conductor cross-section

## Technical characteristics

Cable diameter 6 ... 8 mm Tightening torque 0.6 Nm Material (insert) Polyamide (PA)

Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts) Brass Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079


Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, M12-L, Cable connector, Straight, Deviating contact configuration, 1, 3, 4, HARAX® connection technology, Unshielded	0.34 0.75	21 03 212 1306	21 03 212 2306	app. 52.2
Circular connectors M12, M12-L, Cable connector,	0.34 0.75	21 03 212 1400	21 03 212 2400	SW13
Straight, Deviating contact configuration, 3, 4, 5, HARAX® connection technology, Unshielded				



4

M12

HARAX® connection technology Unshielded

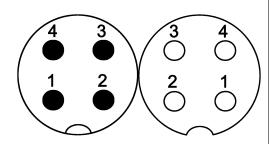

## Technical characteristics

Number of contacts Rated current 4 A Rated voltage 32 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤1.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.14 ... 0.34 mm<sup>2</sup>
Conductor cross-section AWG 26 ... AWG 22

# Technical characteristics

Cable diameter 2.9 ... 5.1 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts)
Surface (contacts)
RoHS
Brass
Gold plated
compliant


## Specifications and approvals

IEC 61076-2-101

UL 1977 ECBT2.E102079

Number of contacts

HARAX® connection technology Unshielded

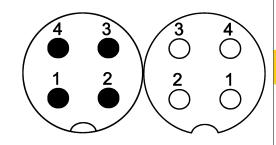

### Technical characteristics

Number of contacts 6 A Rated current Rated voltage 50 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤2.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

0.34 ... 0.75 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 22 ... AWG 18

## Technical characteristics

Cable diameter 6 ... 8 mm, 7 ... 8.8 mm

Tightening torque 0.6 Nm Material (insert) Polyamide (PA)

Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts) Brass Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals


IEC 61076-2-101 UL 1977 ECBT2.E102079

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Unshielded	0.34 0.75	21 03 212 1305	21 03 212 2305	app. 52
				app. 48,9
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Unshielded, Cable-Ø 7 8.8 mm	0.34 0.75	21 03 212 1407	21 03 212 2407	



4

HARAX® connection technology Unshielded

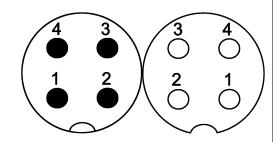

## Technical characteristics

Number of contacts Rated current 4 A 32 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤1.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.25 ... 0.5 mm²
Conductor cross-section AWG 24 ... AWG 20

#### Technical characteristics

Cable diameter 4 ... 5.1 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)

Material (hood/housing) Polyamide (PA), Zinc die-cast


Material (contacts)
Surface (contacts)
RoHS
Brass
Gold plated
compliant

## Specifications and approvals

IEC 61076-2-101


UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

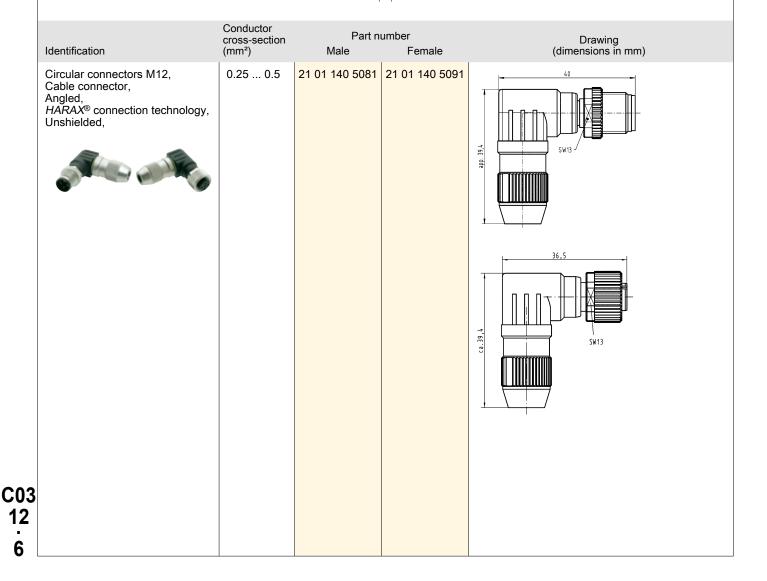

Number of contacts

HARAX® connection technology Shielded

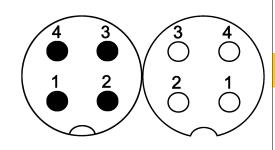

## Technical characteristics

Number of contacts 4 A Rated current Rated voltage 50 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤1.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

0.14 ... 0.34 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 26 ... AWG 22

# Technical characteristics

Cable diameter 4.5 ... 8.8 mm Tightening torque 0.6 Nm, 2 Nm Lock nut Polyamide (PA) Material (insert) Material (hood/housing) Zinc die-cast Material (contacts) Brass Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Shielded	0.14 0.34	21 03 221 1405	21 03 221 2405	complete length when assembled app. 52mm  Complete length when assembled app. 49mm  SW15  SW17  SW15




Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Male Female 21 03 321 1425 21 03 321 2425 Circular connectors M12,  $0.14\ ...\ 0.34$ complete length when assembled app. 51.5mm M12-L,
Cable connector,
Panel feed through,
for rear mounting,
HARAX® connection technology, Shielded

Number of contacts

4

Screw termination Unshielded

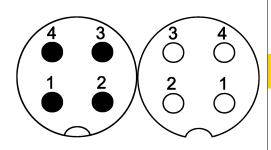

## Technical characteristics

Number of contacts 7.5 A Rated current Rated voltage 250 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type

Locking type Screw locking
Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 1.5 mm² max. Conductor cross-section AWG 16

# Technical characteristics

Cable diameter 4 ... 8 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)

Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals


Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Cable connector, Straight, Screw termination, Unshielded	1.5 max.	21 03 319 1401	21 03 319 2401	complete length when assembled app. 5fmm  Switz  complete length when assembled app. 55mm
				SW18 SW17



Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, Cable connector, Angled, Screw termination, Unshielded 21 03 319 3401 21 03 319 4401 1.5 max. M12×1 complete length when assembled app. 46mm complete length when assembled app. 42mm

4

Screw termination Shielded

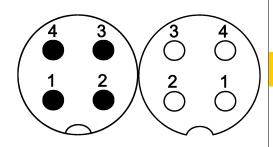

## Technical characteristics

Number of contacts 4 A Rated current Rated voltage 250 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type

Locking type Screw locking
Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 1.5 mm² max. Conductor cross-section AWG 16

# Technical characteristics

Cable diameter 4 ... 8 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption


# Specifications and approvals

Identification	Conductor cross-section (mm²)	Part ni Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded	1.5 max.	21 03 329 1401		complete length when assembled app. 53mm  complete length when assembled app. 53mm  Sw18  Sw19



5

HARAX® connection technology Unshielded

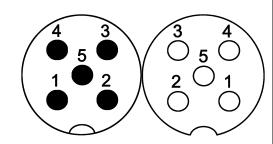

## Technical characteristics

Number of contacts Rated current 4 A 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤2 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.34 ... 0.5 mm²
Conductor cross-section AWG 22 ... AWG 20

#### Technical characteristics

Cable diameter 6 ... 8 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts)

Brass

Surface (contacts) Gold plated RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101

UL 1977 ECBT2.E102079


CSA-C22.2 No. 182.3 ECBT8.E102079

# Conductor Part number cross-section Drawing Identification Female (dimensions in mm) 21 03 272 1505 21 03 272 2505 Circular connectors M12, 0.34 ... 0.5 app. 52, M12-L, Cable connector, Straight, HARAX® connection technology, Unshielded ca.49 SW19 width across flats 13 width across flats 17 width across flats 19

Number of contacts

5

Crimp termination Shielded

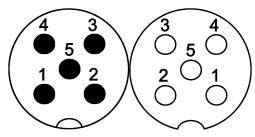

### Technical characteristics

Number of contacts 5
Rated current 4 A
Rated impulse voltage 1.5 kV
Pollution degree 3

Rated voltage 48 V AC, 60 V DC

 Insulation resistance
 >108 Ω

 Contact resistance
 ≤10 mΩ

 Mating cycles
 ≥500

 Wire outer diameter
 ≤2.3 mm

 Locking type
 Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.14 ... 0.75 mm²,

 $\begin{array}{l} 0.09 \; ... \; 0.25 \; mm^2, \\ 0.13 \; ... \; 0.33 \; mm^2, \\ 0.25 \; ... \; 0.52 \; mm^2, \\ 0.33 \; ... \; 0.82 \; mm^2 \end{array}$ 

#### Technical characteristics

Conductor cross-section

AWG 26 ... AWG 24,
AWG 28 ... AWG 24,
AWG 26 ... AWG 22,
AWG 24 ... AWG 20,
AWG 22 ... AWG 18

Cable diameter
Tightening torque
0.6 Nm
Material (insert)
Polyamide (PA)

Zinc die-cast
Material (contacts)
Copper alloy
RoHS

Cable diameter

# Specifications and approvals

IEC 61076-2-101


UL 1977 ECBT2.E102079

		ı	I	
Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Cable connector, with conduit, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.14 0.75	21 03 812 1511	21 03 812 2511	conglete length when assembled ago, 49 finan  width acrosss fluirs 19  complete length when assembled ago, 64 finan  width acrosss fluirs 19  width acrosss fluirs 191
D-Sub, Standard, Crimp contact, Turned contacts	0.13 0.33	09 67 000 7576 09 67 000 5576 09 67 000 8576 09 67 000 3576	09 67 000 5476 09 67 000 8476	Wire gauge Ø Stripping length 0.09-0.25 mm² 0.64 mm 4 mm 0.13-0.33 mm² 0.88 mm 4 mm 0.25-0.52 mm² 1.13 mm 4 mm 0.33-0.82 mm² 1.34 mm 4 mm for stranded wire according IEC 60228 Class 5



5

Screw termination Unshielded

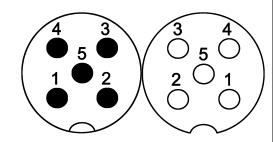

## Technical characteristics

 Number of contacts
 5

 Rated current
 7.5 A

 Rated voltage
 60 V

 Rated impulse voltage
 1.5 kV

 Pollution degree
 3

 Insulation resistance
 >108 Ω

 Contact resistance
 ≤10 mΩ

 Mating cycles
 ≥100

 Locking type
 Screw loc

Locking type Screw locking
Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 1.5 mm² max.
Conductor cross-section AWG 16

#### Technical characteristics

Cable diameter 4 ... 8 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Polyamide (PA), Zinc die-cast


Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant, compliant with

exemption

# Specifications and approvals

IEC 61076-2-101

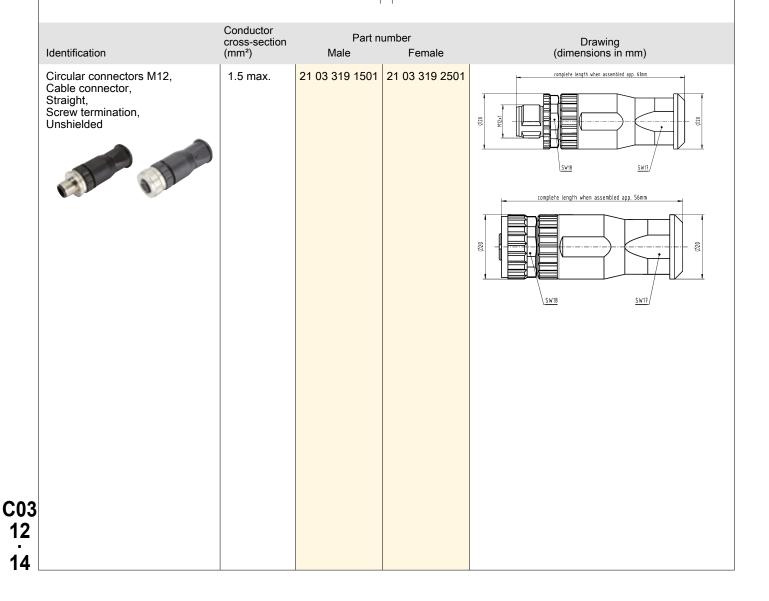




Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Male Female Circular connectors M12, Cable connector, Angled, Screw termination, Unshielded 1.5 max. 21 03 319 3501 21 03 319 4501 complete length when assembled app. 46mm SW18 complete length when assembled app. 42mm



5

Screw termination Shielded

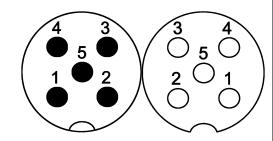

## Technical characteristics

Number of contacts 4 A Rated current Rated voltage 60 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 1.5 mm² max. Conductor cross-section AWG 16

## Technical characteristics

Cable diameter 4 ... 8 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption


# Specifications and approvals

Identification	Conductor cross-section (mm²)	Part n	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded	1.5 max.	21 03 329 1501	21 03 329 2501	complete length when assembled app. S8mm  SW18  SW19
				complete length when assembled app. 53mm  SW19
3				

Number of contacts



IDC termination Shielded

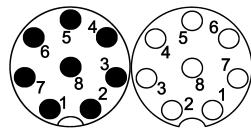

#### Technical characteristics

Number of contacts Rated current 2 A 30 V Rated voltage Rated impulse voltage 0.8 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles Wire outer diameter ≤1.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.14 ... 0.34 mm² Conductor cross-section AWG 26 ... AWG 22


### Technical characteristics

Cable diameter 4 ... 8 mm
Tightening torque 0.4 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant, compliant with


exemption

# Specifications and approvals

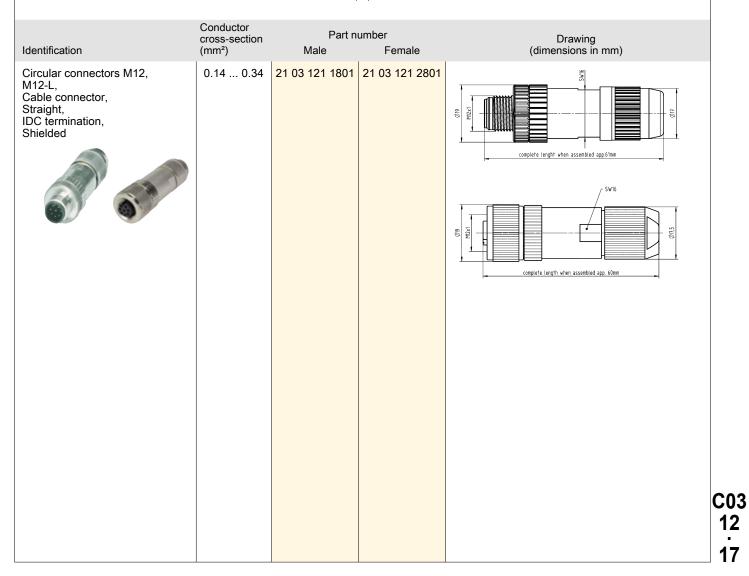



Screw termination Unshielded

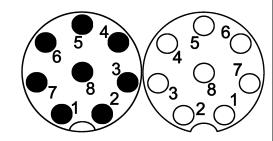

#### Technical characteristics

Number of contacts 2 A Rated current Rated voltage 30 V Rated impulse voltage 0.8 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking

Degree of protection acc. to IEC IP67, when mated 60529

Conductor cross-section 0.5 mm<sup>2</sup> max. AWG 20 Conductor cross-section

## Technical characteristics

Cable diameter 4 ... 8 mm Tightening torque 0.6 Nm Material (insert) Polyamide (PA) Material (hood/housing) Polyamide (PA), Zinc die-cast

Material (contacts) **Brass** Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

Ic	lentification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
C	circular connectors M12, cable connector, traight, crew termination, inshielded	0.5 max.	21 03 319 1801	21 03 319 2801	complete length when assembled app. 61mm
					complete length when assembled app. 56mm  SW18  SW17
3					




Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)	
Circular connectors M12, Cable connector, Angled, Screw termination, Unshielded	0.5 max.	21 03 319 3801	21 03 319 4801	M12x1 SW18  SW17  Complete length when assembled app. 45mm	M12
				SW18 SW18 SW18 SCOmplete length when assembled app. 42mm	
					C03 12

. 19



Screw termination Shielded

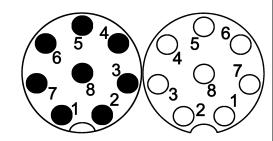

# Technical characteristics

Number of contacts 2 A Rated current Rated voltage 30 V Rated impulse voltage 0.8 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 0.5 mm<sup>2</sup> max. AWG 20 Conductor cross-section

## Technical characteristics

Cable diameter 4 ... 8 mm Tightening torque 0.6 Nm Material (insert) Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) **Brass** Surface (contacts) Gold plated

RoHS compliant with exemption


# Specifications and approvals

IEC 61076-2-101

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded	0.5 max.	21 03 329 1801	21 03 329 2801	Complete length when assembled app. S8mm  SW18  SW18
				complete length when assembled app. 53mm  Sw18
3				

Number of contacts

HARAX® connection technology Shielded

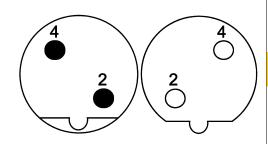

#### Technical characteristics

Number of contacts 4 A Rated current Rated voltage 32 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤2.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

0.25 ... 0.34 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 24 ... AWG 22

## Technical characteristics

Cable diameter 4.5 ... 8.8 mm, 7 ... 8.8 mm Tightening torque 0.6 Nm, 2 Nm Lock nut Material (insert) Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) Brass Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Shielded	0.25 0.34	21 03 241 1301	21 03 241 2301	Gesamtlänge im verschraubten Zustand ca. 58mm complete length when assembled app. 58mm  SW17  Width across flats 17  Gesamtlänge im verschraubten Zustand ca. 54.5mm complete length when assembled app. 54,5mm  SW17  Width across flats 17  SW17  SW15  Vidth across flats 17  SW15  SW15  Flats 15




Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Male Female 21 03 341 1425 21 03 341 2425 Circular connectors M12,  $0.25 \dots 0.34$ M12 complete length when assembled app. 57mm M12-L, Cable connector, Panel feed through, for rear mounting, HARAX® connection technology, Shielded, Cable-Ø 7 ... 8.8 mm complete length when assembled app. 53mm C03 22



5

Crimp termination Shielded

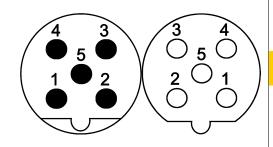

# Technical characteristics

Number of contacts Rated current 4 A 60 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Wire outer diameter ≤2.3 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section

0.14 ... 0.75 mm², 0.09 ... 0.25 mm², 0.13 ... 0.33 mm², 0.25 ... 0.52 mm², 0.33 ... 0.82 mm²

#### Technical characteristics


AWG 26 ... AWG 18, AWG 28 ... AWG 24, Conductor cross-section AWG 26 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18 Cable diameter 4.5 ... 8.8 mm Tightening torque 0.6 Nm, 2 Nm Lock nut Material (insert) Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy RoHS compliant, compliant with exemption

exemption

# Specifications and approvals

IEC 61076-2-101

UL 1977 ECBT2.E102079

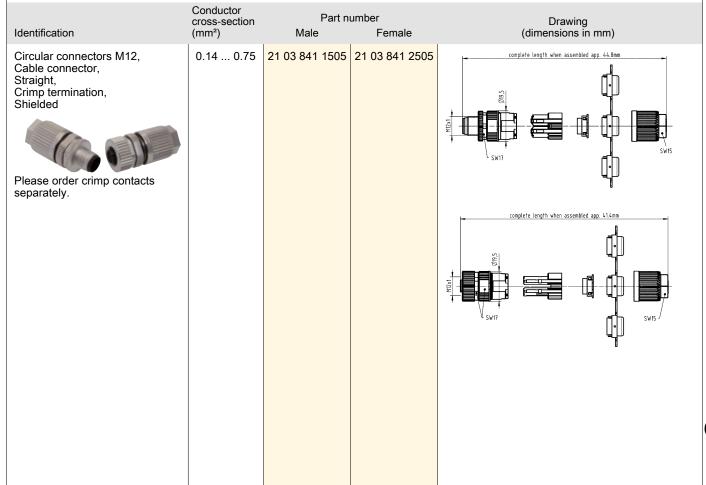

Identification

separately.



M12

Circular connectors M12, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded




21 03 841 1525 21 03 841 2525  $0.14\ ...\ 0.75$ 


Male

Part number

Female




Drawing (dimensions in mm)



D-Sub, Standard, Crimp contact, Turned contacts	0.13 0.33 0.25 0.52	09 67 000 7576 09 67 000 5576 09 67 000 8576 09 67 000 3576	09 67 000 5476 09 67 000 8476
11/			

Conductor

cross-section (mm²)




Wire gauge	Ø	Stripping length			
0.09-0.25 mm <sup>2</sup>	0.64 mm	4 mm			
0.13-0.33 mm <sup>2</sup>	0.88 mm	4 mm			
0.25-0.52 mm <sup>2</sup>	1.13 mm	4 mm			
0.33-0.82 mm <sup>2</sup>	1.34 mm	4 mm			
f					

for stranded wire according IEC 60228 Class 5

Number of contacts

5

Screw termination Shielded

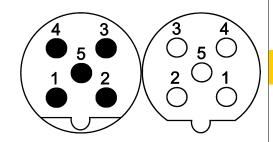

## Technical characteristics

Number of contacts 4 A Rated current Rated voltage 60 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type

Locking type Screw locking
Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 1.5 mm² max.
Conductor cross-section AWG 16

# Technical characteristics

Cable diameter 4 ... 8 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption


# Specifications and approvals

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Identification  Circular connectors M12, Cable connector, Straight, Screw termination, Shielded	cross-section (mm²)  1.5 max.		Female	(dimensions in mm)  complete length when assembled app. 57mm  complete length when assembled app. 53mm  complete length when assembled app. 53mm



4

HARAX® connection technology Shielded

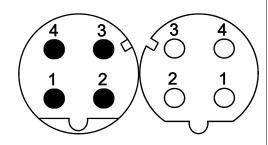

#### Technical characteristics

Number of contacts Rated current 4 A 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Wire outer diameter ≤2 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.14 ... 0.34 mm², 0.34 ... 0.75 mm²

Conductor cross-section AWG 26 ... AWG 22, AWG 22 ... AWG 18

Cable diameter 4.5 ... 8.8 mm

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 0.6 Nm, 2 Nm Lock nut Material (insert) Polyamide (PA)

Technical characteristics

Material (hood/housing)

Material (contacts)

Surface (contacts)

Zinc die-cast
Brass

Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079



#### **Details**

For Fast Ethernet applications only

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, M12-L, Cable connector, Straight, HARAX® connection technology, Shielded	0.14 0.34 0.34 0.75	21 03 281 1405 21 03 282 1405	21 03 281 2405 21 03 282 2405	complete length when assembled app. 52mm SW15
3				complete length when assembled app. 49mm  SW15

**И12** 




Conductor Part number Drawing (dimensions in mm) cross-section Identification (mm²) Male Female 21 03 381 1425 21 03 381 2425 Circular connectors M12,  $0.14 \dots 0.34$ complete length when assembled app. 51.5mm M12-L, Cable connector, Panel feed through, for rear mounting,

HARAX® connection technology, Shielded Gesamtlänge im verschraubten Zustand ca. 48,2mm\_complete length when assembled app. 48,2mm\_15,1\_ width across flats 13 SW17 width across flats 17



Crimp termination Shielded

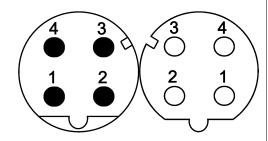

# Technical characteristics

Number of contacts Rated current 4 A Rated impulse voltage 1.5 kV Pollution degree

48 V AC, 60 V DC Rated voltage

>10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Wire outer diameter ≤2.3 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

0.14 ... 0.75 mm², 0.09 ... 0.25 mm², 0.13 ... 0.33 mm², 0.25 ... 0.52 mm², Conductor cross-section

0.33 ... 0.82 mm<sup>2</sup>

Conductor cross-section

AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18

#### Technical characteristics

Cable diameter 4.5 ... 8.8 mm

Transmission characteristics Cat. 5, Class D up to 100 MHz 0.6 Nm

Tightening torque Material (insert) Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101

UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079

#### **Details**

For Fast Ethernet applications only

				•	
	Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
	Circular connectors M12, Cable connector, with conduit, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	0.14 0.75	21 03 882 1411	21 03 882 2411	conglete length when assembled age, 69.55mm  width across filets 172  complete length when assembled age, 63 film
					with across charts 22
3					




Identification	Conductor cross-section (mm²)	Part number Male Female	Drawing e (dimensions in mm)
D-Sub, Standard, Crimp contact, Turned contacts	0.09 0.25 0.13 0.33 0.25 0.52 0.33 0.82	09 67 000 7576 09 67 000 8576 09 67 000 3576 09 67 000 3576 09 67 000 3	5476 8476



4

Screw termination Shielded

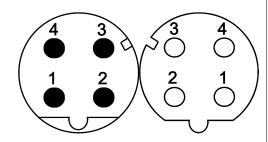

#### Technical characteristics

 $\begin{array}{lll} \text{Number of contacts} & 4 \\ \text{Rated current} & 4 \text{ A} \\ \text{Rated voltage} & 250 \text{ V} \\ \text{Rated impulse voltage} & 1.5 \text{ kV} \\ \text{Pollution degree} & 3 \\ \text{Insulation resistance} & >10^8 \, \Omega \\ \text{Contact resistance} & \leq 10 \, \text{m} \Omega \\ \text{Mating cycles} & \geq 100 \\ \end{array}$ 

Locking type Screw locking
Degree of protection acc. to IEC IP67, when mated

60529

Conductor cross-section 1.5 mm² max.
Conductor cross-section AWG 16
Cable diameter 4 ... 8 mm

Transmission characteristics Cat. 5, Class D up to 100 MHz

0.6 Nm

Conductor

Tightening torque

# Technical characteristics

Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Brass
Surface (contacts) Gold plated

RoHS compliant with exemption

# Specifications and approvals

IEC 61076-2-101

#### **Details**


For Fast Ethernet applications only

Identification	cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Cable connector, Straight, Screw termination, Shielded, IP67	1.5 max.	21 03 389 1402	21 03 389 2402	complete length when assembled app. 57mm  SW18 SW19
				complete length when assembled app. 53mm
3				

Dort number

Number of contacts

Screw termination Shielded



#### Technical characteristics

Number of contacts Rated current 4 A 250 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking Degree of protection acc. to IEC IP65, when mated

60529

Conductor cross-section 1.5 mm<sup>2</sup> max. Conductor cross-section AWG 16 Cable diameter 4.5 ... 8.3 mm

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 0.6 Nm

#### Technical characteristics

Material (insert) Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) Brass Surface (contacts) Gold plated

# Specifications and approvals


IEC 61076-2-101

UL 1977 ECBT2.E102079

CSA-C22.2 No. 182.3 ECBT8.E102079


#### **Details**

For Fast Ethernet applications only

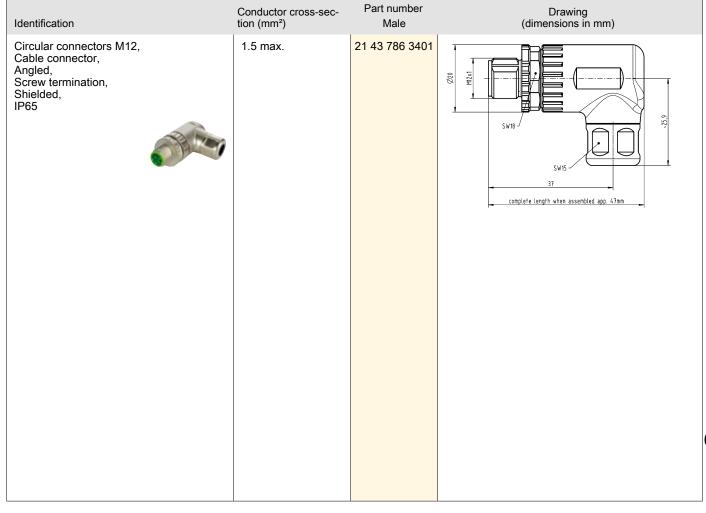



preLink® IDC insulation displacement termination . Shielded



### Technical characteristics

Number of contacts

-40 ... +85 °C Limiting temperature Mating cycles ≥500 Screw locking

Locking type Degree of protection acc. to IEC IP65, IP67

60529

 $\begin{array}{c} 0.1 \; ... \; 0.12 \; mm^2, \\ 0.22 \; ... \; 0.32 \; mm^2 \end{array}$ Conductor cross-section

AWG 27 ... AWG 26, Conductor cross-section AWG 24 ... AWG 22 5 ... 9.5 mm

Cable diameter Cat. 5, Class D up to 100 MHz

Transmission characteristics

Data rate 10 Mbit/s, 100 Mbit/s Zinc die-cast

Material (hood/housing) Surface (hood/housing) Nickel plated

RoHS compliant with exemption

## Specifications and approvals

UL 1863 DUXR2.E470046


CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046 DNV GL

*PPPP* nien

#### **Details**

	Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
	preLink®, Circular connectors M12, Screw mounted housing, Cable connector, preLink® IDC insulation displacement termination, Shielded	0.1 0.12, 0.22 0.32	20 82 005 0001	
	Please order terminal module separately			
3				
2				
2				

preLink® IDC insulation displacement termination



### Technical characteristics

Number of contacts

-40 ... +85 °C Limiting temperature

≥500 Mating cycles

Locking type Screw locking Degree of protection acc. to IEC IP65, IP67

Conductor cross-section

 $\begin{array}{c} 0.1 \; ... \; 0.12 \; mm^2, \\ 0.22 \; ... \; 0.32 \; mm^2 \end{array}$ 

AWG 27 ... AWG 26, Conductor cross-section AWG 24 ... AWG 22

Cable diameter 5 ... 9.5 mm

Cat. 5, Class D up to 100 MHz Transmission characteristics

Data rate 10 Mbit/s, 100 Mbit/s Material (insert) Zinc die-cast, nickel-plated

Material (hood/housing) Zinc die-cast

RoHS compliant with exemption,

compliant

## Specifications and approvals

UL 1863 DUXR2.E470046

CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046

DNV GL

*pppp*° doina

#### **Details**


Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Connector insert, preLink® IDC insulation displacement termination, Shielded	0.1 0.12, 0.22 0.32	20 82 005 1214	
Please order terminal module separately Please order screw mounted housing separately.			
preLink®, Circular connectors M12, Screw mounted housing, Empty housing	0.1 0.12, 0.22 0.32	20 82 000 1210	



4

M12

preLink® IDC insulation displacement termination Shielded



#### **Features**

- · Ethernet data connector suitable for industry
- · Robust design
- 360° shielding
- · Category of transmission Cat. 5
- · Suitable for termination of massive and flexible wires
- · Suitable for all PoE versions
- · Very fast preLink® termination technology

#### Technical characteristics

Number of contacts 4

Limiting temperature -40 ... +85 °C

Mating cycles ≥500

Locking type Screw locking, PushPull

Degree of protection acc. to IEC IP65, IP67

60529

Conductor cross-section 0.1 ... 0.12 mm²,

0.22 ... 0.32 mm<sup>2</sup>

Conductor cross-section AWG 27 ... AWG 26, AWG 24 ... AWG 22

Cable diameter 5 ... 9.5 mm

Transmission characteristics Cat. 5, Class D up to 100 MHz

Data rate 10 Mbit/s, 100 Mbit/s Material (hood/housing) Zinc die-cast

Surface (hood/housing) Zinc die-cast
Nickel plated


RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 DNV GL




#### **Details**

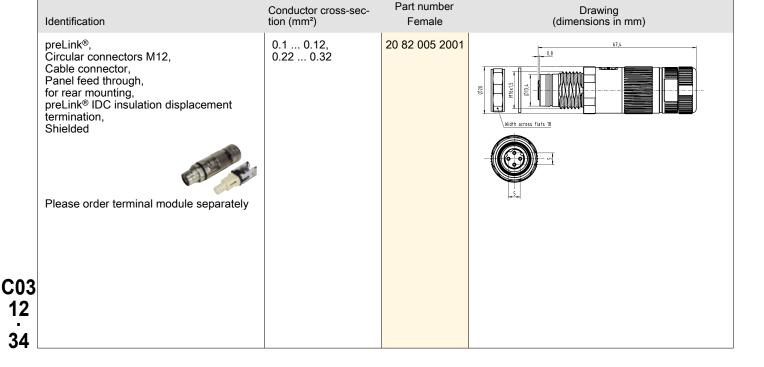





preLink® IDC insulation displacement termination



#### Technical characteristics

Number of contacts

-40 ... +85 °C Limiting temperature

Mating cycles ≥500

Locking type Screw locking Degree of protection acc. to IEC IP65, IP67

60529

0.1 ... 0.12 mm², 0 .22 ... 0.32 mm² Conductor cross-section

AWG 27 ... AWG 26, AWG 24 ... AWG 22 Conductor cross-section

Cable diameter 5 ... 9.5 mm

Transmission characteristics Cat. 6<sub>A</sub>, Class E<sub>A</sub> up to 500

10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 2.5 Gbit/s, 5 Gbit/s, 10 Gbit/s Data rate

Material (hood/housing) Zinc die-cast Surface (hood/housing) Nickel plated

### Technical characteristics

RoHS compliant with exemption

## Specifications and approvals

UL 1863 DUXR2.E470046

CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046

DNV GL



#### **Details**

For Ethernet applications up to 10 Gbit only


Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Screw mounted housing, Cable connector, preLink® IDC insulation displacement termination, Shielded	0.1 0.12, 0.22 0.32	20 82 005 0002	
Please order terminal module separately			

compliant with exemption,



Number of contacts

preLink® IDC insulation displacement termination Shielded



#### Technical characteristics

Number of contacts

-40 ... +85 °C Limiting temperature

Mating cycles ≥500

Locking type Screw locking Degree of protection acc. to IEC IP65, IP67

60529

0.1 ... 0.12 mm², Conductor cross-section

0.22 ... 0.32 mm<sup>2</sup>

AWG 27 ... AWG 26, Conductor cross-section

AWG 24 ... AWG 22

Cable diameter 5 ... 9.5 mm

Transmission characteristics Cat. 6<sub>A</sub>, Class E<sub>A</sub> up to 500

Data rate 10 Mbit/s, 100 Mbit/s, 1 Gbit/s,

2.5 Gbit/s, 5 Gbit/s, 10 Gbit/s Zinc die-cast, nickel-plated

Material (insert) Material (hood/housing) Zinc die-cast

Technical characteristics

compliant

Specifications and approvals

UL 1863 DUXR2.E470046

CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046

DNV GL

RoHS

*<i><b>98999* 


#### **Details**

For Ethernet applications up to 10 Gbit only

Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
preLink®, Circular connectors M12, Connector insert, preLink® IDC insulation displacement termination, Shielded	0.1 0.12, 0.22 0.32	20 82 006 1218	
Please order terminal module separately Please order screw mounted housing separately.			
preLink®, Circular connectors M12, Screw mounted housing, Empty housing	0.1 0.12, 0.22 0.32	20 82 000 1210	
3			



preLink® IDC insulation displacement termination



#### **Features**

- · Ethernet data connector suitable for industry
- · Robust design
- · 360° shielding
- · Category of transmission Cat. 6A
- · Suitable for termination of massive and flexible wires
- · Suitable for all PoE versions
- · Very fast preLink® termination technology

#### Technical characteristics

Number of contacts

-40 ... +85 °C Limiting temperature

Mating cycles ≥500

Locking type Screw locking, PushPull

Degree of protection acc. to IEC IP65, IP67

0.1 ... 0.12 mm², Conductor cross-section

0.22 ... 0.32 mm<sup>2</sup>

AWG 27 ... AWG 26, Conductor cross-section AWG 24 ... AWG 22

5 ... 9.5 mm

Cable diameter

Transmission characteristics Cat. 6<sub>A</sub>, Class E<sub>A</sub> up to 500

MHz

Data rate 10 Mbit/s, 100 Mbit/s, 1 Gbit/s, 2.5 Gbit/s, 5 Gbit/s, 10 Gbit/s

Zinc die-cast

Material (hood/housing) Surface (hood/housing) Nickel plated

RoHS compliant with exemption


## Specifications and approvals

IEC 61076-2-109 **DNV GL** 



## **Details**

For Ethernet applications up to 10 Gbit only

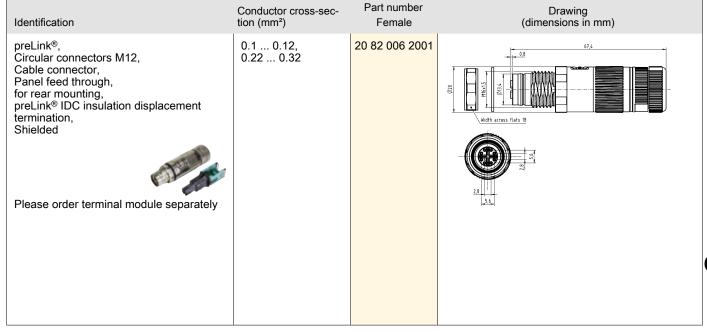

preLink® IDC insulation displacement termination



### Technical characteristics

Limiting temperature -40 ... +85 °C

Mating cycles ≥10

Wire outer diameter 1.3 ... 1.6 mm, 0.8 ... 1.1 mm

Conductor cross-section 0.22 ... 0.32 mm², 0.1 ... 0.12 mm²

Conductor cross-section AWG 24 ... AWG 22,

AWG 24 ... AWG 22, AWG 27 ... AWG 26

Colour (insert) Yellow, White, Black

RoHS compliant

## Specifications and approvals

DNV GL

UL 1863 DUXR2.E470046

CSA-C22.2 No. 182.4, No. 233-09 DUXR8.E470046



Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)
preLink®, Terminal module, 8-pins, preLink® IDC insulation displacement termination, Conductor diameter 1.3 - 1.6 mm, Pack contents: 10 pieces	0.22 0.32	20 82 000 0001	
preLink®.	0.1 0.12	20 82 000 0003	
Terminal module, 8-pins, preLink® IDC insulation displacement termination, Conductor diameter 0.8 - 1.1 mm, Pack contents: 10 pieces			The state of the s
THE BEALTH IN			

# preLink® M12




Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)	
preLink®, Terminal module, 4-pin, AIDA compliant, preLink® IDC insulation displacement termination, Conductor diameter 1.3 - 1.6 mm, Pack contents: 10 pieces	0.22 0.32	20 82 000 0005	9,5	M12
preLink®, Terminal module, 4-pin, AIDA compliant, preLink® IDC insulation displacement termination, Conductor diameter 1.3 - 1.6 mm, Pack contents: 100 pieces	0.22 0.32	20 82 000 0005 XL	9.5 10.6 10.6 10.6 10.6 10.6 10.6 10.6 10.6	C03 12 .39



4

HARAX® connection technology Shielded

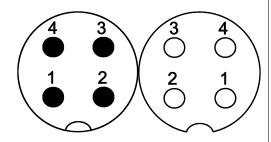

#### Technical characteristics

Number of contacts 4 A Rated current 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Wire outer diameter ≤1.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.34 mm², 0.14 mm Conductor cross-section AWG 22, AWG 26

0.34 mm², 0.14 mm²

### Technical characteristics

Cable diameter 5.7 ... 8.8 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated
RoHS compliant

## Specifications and approvals

IEC 61076-2-101


UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521

Identification	Conductor cross-section (mm²)	Part n	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Slim Design, Cable connector, Straight, HARAX® connection technology, Shielded	0.14 0.34	21 03 322 1410 21 03 322 1400	21 03 322 2410 21 03 322 2400	length when assembled app. 46mm  width across flats 15  Vidth across flats 15
3				length when assembled app. 42mm  width across flats 15  flats 15



Crimp termination Shielded

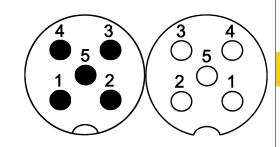

#### Technical characteristics

Number of contacts Rated current 4 A Rated impulse voltage 1.5 kV Pollution degree

48 V AC, 60 V DC Rated voltage

>10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Wire outer diameter ≤2.3 mm

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.13 ... 0.82 mm²,

0.09 ... 0.25 mm<sup>2</sup>, 0.13 ... 0.33 mm<sup>2</sup>, 0.25 ... 0.52 mm², 0.33 ... 0.82 mm<sup>2</sup>

## Technical characteristics

AWG 26 ... AWG 18, AWG 28 ... AWG 24, Conductor cross-section AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18 Cable diameter 5.7 ... 8.8 mm Tightening torque 0.6 Nm, 2 Nm Lock nut Material (insert) Liquid crystal polymer (LCP) Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy

RoHS compliant, compliant with


exemption

## Specifications and approvals

IEC 61076-2-101

UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521

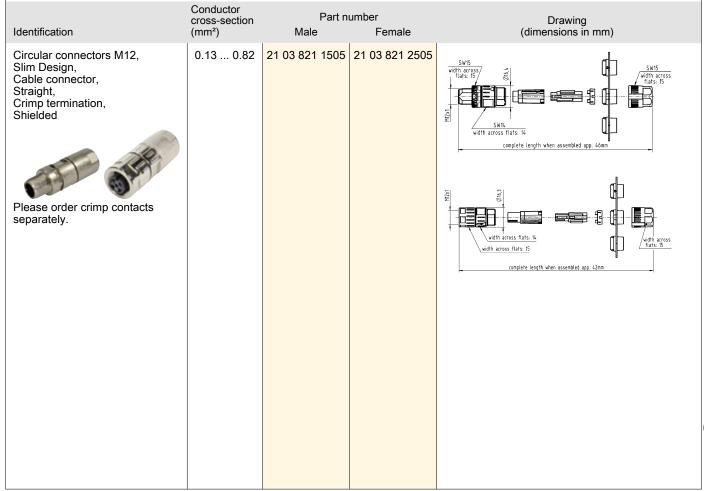



Conductor Part number Drawing cross-section Identification (dimensions in mm) (mm<sup>2</sup>) Male Female Circular connectors M12,  $0.13 \dots 0.82$ 21 03 821 1507 21 03 821 2507 SW15 width across Slim Design, Ø16,4 flats: 15 Cable connector, Straight,
Crimp termination, Shielded, Shield connection with crimp flange width across width across flats: 14 flats: 15 complete length when assembled app. 40,5 SW15 width across Please order crimp contacts separately. Please order crimp flange set separately. SW14 width across flats: 14 width arross flats: 15 complete length when assembled app. 36,5 Circular connectors M12, 0.13 ... 0.82 21 03 821 1525 21 03 821 2525 length when assembled app. 46mm Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded Please order crimp contacts separately. Circular connectors M12, 0.13 ... 0.82 21 03 821 2527 Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, width aci flat:15 flat:19 Shielded, Shield connection with crimp flange Please order crimp contacts separately. Please order crimp flange set separately.

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)	
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 0.82	21 03 821 3505	21 03 821 4505	length when assembled app. 55  width across flats: 15  width across flats: 15  width across flats: 16	M12
				length when assembled app. 51 width across flats: 15 width across flats: 15 width across flats: 15	
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange	0.13 0.82	21 03 821 3507	21 03 821 4507	length when assembled app. 54  SW15 SW15 SW16 SW16 SW16 SW16 SW16 SW16 SW16 SW16	
Please order crimp contacts separately. Please order crimp flange set separately.				SW15 SW15 width across flats: 15 SW16 width across flats: 15 SW16 Width across flats: 16 SW16 SW16 SW16 SW16 SW16 SW16 SW16 SW	
D-Sub, Standard, Crimp contact, Turned contacts	0.09 0.25 0.13 0.33 0.25 0.52 0.33 0.82	09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476 09 67 000 3476	Wire gauge Ø Stripping length 0.09-0.25 mm² 0.64 mm 4 mm 0.13-0.33 mm² 0.88 mm 4 mm 0.25-0.52 mm² 1.13 mm 4 mm 0.33-0.82 mm² 1.34 mm 4 mm for stranded wire according IEC 60228 Class 5	
					C03 12 43

## M12 Slim Design


## A-coding



Conductor Part number Drawing (dimensions in mm) cross-section Identification Male Female (mm<sup>2</sup>) 21 01 010 00xx Circular connectors M12, 21 01 010 00xx M12 Slim Design, Crimp flange set D2 D1 D3 D4 D5 HARTING offers to test and define the best crimp flange and 21 01 010 0017 3.5 4.5 6.0 6.5 7.5 ferrule combination for customer specific cables. 21 01 010 0018 5.5 7.5 8.5 4.5 6.6 5.5 6.8 21 01 010 0019 4.5 8.0 9.0 21 01 010 0020 5.0 6.0 7.8 9.0 10.0 21 01 010 0021 10.0 10.8 6.5 7.5 8.0 6.0 10.0 21 01 010 0022 5.0 7.4 9.0 21 01 010 0024 6.5 8.8 10.0 10.8



Crimp termination Shielded

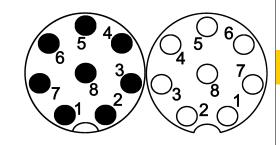

#### Technical characteristics

Number of contacts 8 Rated current 2 A Rated impulse voltage 0.8 kV Pollution degree

30 V AC, 30 V DC Rated voltage

>10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Wire outer diameter ≤1.65 mm

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

0.13 ... 0.33 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 26 ... AWG 22 Cable diameter 5.7 ... 8.8 mm

#### Technical characteristics

Tightening torque 0.6 Nm, 2 Nm Lock nut Material (insert) Liquid crystal polymer (LCP)

Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Gold plated Surface (contacts)

compliant, compliant with exemption RoHS

## Specifications and approvals

IEC 61076-2-101 UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521

Identification  Conductor cross-section (mm³)  Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.  Please order crimp contacts  Part number Male Female  21 03 821 2805  21 03 821 2805  21 03 821 2805  Conglete length when assembled app 44mm assembled app 44mm arranged language for the connector and the connector arranged language for the connector arranged la					
Slim Design, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts separately.	Identification	cross-section			Drawing (dimensions in mm)
width across flats: 14 width across flats: 15	Slim Design, Cable connector, Straight, Crimp termination, Shielded  Please order crimp contacts	0.13 0.33	21 03 821 1805	21 03 821 2805	width across flats: 15  Width across flats: 15  Width across flats: 15
					width across flats: 14 width across flats: 15



Conductor Part number Drawing (dimensions in mm) cross-section Identification (mm<sup>2</sup>) Male Female 21 03 821 1807 Circular connectors M12,  $0.13 \dots 0.33$ 21 03 821 2807 SW15 width across Slim Design, Ø16,4 flats: 15 Cable connector, Straight,
Crimp termination, Shielded, Shield connection with crimp flange SW14 SW15 width across width across flats: 15 complete length when assembled app. 40,5 Please order crimp contacts separately. Please order crimp flange set flats: 15 separately. SW14 SW15 complete length when assembled app. 36,5 Circular connectors M12, 0.13 ... 0.33 21 03 821 1825 21 03 821 2825 Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded width acros Please order crimp contacts separately. Circular connectors M12, 21 03 821 2827 0.13 ... 0.33 Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded, complete length when assembled app. 36,5 Shield connection with crimp flange Please order crimp contacts separately. Please order crimp flange set separately.

۸.	1	4	
I۷	Ц	ı	١

	Conductor	Port n	umber		
Identification	cross-section (mm²)	Male	Female	Drawing (dimensions in mm)	
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded  Please order crimp contacts separately.	0.13 0.33	21 03 821 3805	21 03 821 4805	length when assembled app. 55  vidth across flats: 15  Vidth across flats: 15  Vidth across flats: 16	M12
				length when assembled app. 51  Width across flats: 15  Width across flats: 15  Width across flats: 16	
Circular connectors M12, Slim Design, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange	0.13 0.33	21 03 821 3807	21 03 821 4807	length when assembled app. 54.  SW15 Width across flats: 15  Width across flats: 15  Width across flats: 15	
Please order crimp contacts separately. Please order crimp flange set separately.				length when assembled app. 51  SW15  width across flats: 15  Flats: 16  SW15  width across flats: 15	
Circular connectors M12, Crimp contact, Turned contacts	0.13 0.33	21 01 100 9020	21 01 100 9025	91(6)	
				5,8	
					C03 12 47

## M12 Slim Design

M12


## A-coding



Conductor Part number Drawing (dimensions in mm) cross-section Identification Male Female (mm<sup>2</sup>) 21 01 010 00xx Circular connectors M12, 21 01 010 00xx Slim Design, Crimp flange set D2 D1 D3 D4 D5 HARTING offers to test and define the best crimp flange and 21 01 010 0017 3.5 4.5 6.0 6.5 7.5 ferrule combination for customer specific cables. 21 01 010 0018 5.5 7.5 8.5 4.5 6.6 6.8 21 01 010 0019 4.5 5.5 8.0 9.0 21 01 010 0020 5.0 6.0 7.8 9.0 10.0 21 01 010 0021 10.0 10.8 6.5 7.5 8.0 6.0 10.0 21 01 010 0022 5.0 7.4 9.0 21 01 010 0024 6.5 8.8 10.0 10.8

4

HARAX® connection technology Shielded

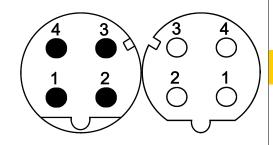

#### Technical characteristics

Number of contacts 4 A Rated current 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500 Wire outer diameter ≤1.6 mm Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.34 mm², 0.14 mm²
Conductor cross-section AWG 22, AWG 26
Cable diameter 5.7 ... 8.8 mm

Transmission characteristics Cat. 5, Class D up to 100 MHz

Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast

#### Technical characteristics

Material (contacts) Copper alloy Surface (contacts) Gold plated compliant

## Specifications and approvals

IEC 61076-2-101 UL 2238 CYJV2.E302521 CSA-C22.2 No. 182.3 CYJV8.E302521




#### **Details**

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Slim Design, Cable connector, Straight, HARAX® connection technology, Shielded	0.14 0.34	21 03 382 1410 21 03 382 1400	21 03 382 2410 21 03 382 2400	46mm 5W15 SW15
				42mm SW15



Crimp termination Shielded

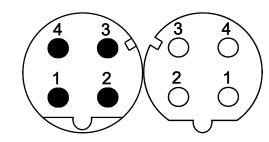

#### Technical characteristics

Number of contacts Rated current 4 A Rated impulse voltage 1.5 kV Pollution degree

48 V AC, 60 V DC Rated voltage

>10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500 Wire outer diameter <2.3 mm

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529 Conductor cross-section 0.13 ... 0.82 mm²,

0.09 ... 0.25 mm<sup>2</sup>, 0.13 ... 0.33 mm<sup>2</sup>, 0.25 ... 0.52 mm², 0.33 ... 0.82 mm² AWG 26 ... AWG 18,

Conductor cross-section AWG 28 ... AWG 24, AWG 26 ... AWG 22,

AWG 24 ... AWG 20, AWG 22 ... AWG 18

Cable diameter 5.7 ... 8.8 mm

### Technical characteristics

Transmission characteristics Tightening torque Material (insert) Material (hood/housing) Material (contacts)

RoHS

Cat. 5, Class D up to 100 MHz 0.6 Nm, 2 Nm Lock nut Liquid crystal polymer (LCP)

Zinc die-cast Copper alloy

compliant, compliant with

exemption

## Specifications and approvals


IEC 61076-2-101 UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521



#### **Details**

For Fast Ethernet applications only

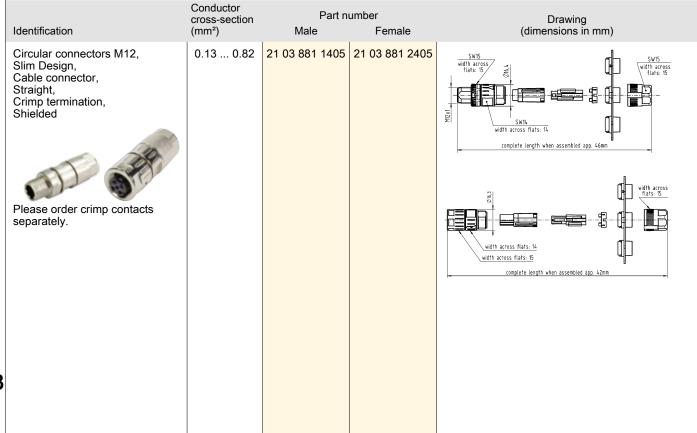

C03 12 51

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 0.82	21 03 881 1407	21 03 881 2407	SW15 width across flats: 15 flats: 15  SW14 width across flats: 14  complete length when is assembled app. 40,5  SW15 width across flats: 15  width across flats: 15  complete length when assembled app. 36,5
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded	0.13 0.82	21 03 881 1426	21 03 881 2425	length when assembled app. 46mm  Width across flats 19 (flats 19 )
Please order crimp contacts separately.				with across that 5 consider length when assembled ago, 42 mm
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded, Shield connection with crimp flange	0.13 0.82		21 03 881 2427	SW19 width across flat-18  SW19 width across flat-19  Complete Length when assembled app. 36,5
Please order crimp contacts separately. Please order crimp flange set separately.				



Conductor Part number Drawing cross-section Identification (dimensions in mm) (mm<sup>2</sup>) Male Female Circular connectors M12,  $0.13 \dots 0.82$ 21 03 881 3405 21 03 881 4405 length when assembled app. 55 Slim Design, Cable connector, Angled, Crimp termination, Shielded Please order crimp contacts separately. length when assembled app. 51 Circular connectors M12, 0.13 ... 0.82 21 03 881 3407 21 03 881 4407 Slim Design, length when assembled app. 51 Cable connector, SW15 width across flats: 15 Angled, width across flats: 15 Crimp termination, Shielded, Shield connection with crimp flange SW16 width across flats: 16 Please order crimp contacts separately. Please order crimp flange set separately. 09 67 000 7576 09 67 000 5576 D-Sub. 0.09 ... 0.25 09 67 000 7476 13,6 09 67 000 5476 Standard,  $0.13 \dots 0.33$ 09 67 000 8576 09 67 000 8476 Crimp contact,  $0.25 \dots 0.52$ Turned contacts  $0.33 \dots 0.82$ 09 67 000 3576 09 67 000 3476 Wire gauge Stripping length 0.09-0.25 mm<sup>2</sup> 0.64 mm 4 mm 0.13-0.33 mm<sup>2</sup> 0.88 mm 4 mm 0.25-0.52 mm<sup>2</sup> 1.13 mm 4 mm 0.33-0.82 mm<sup>2</sup> 1.34 mm 4 mm for stranded wire according IEC 60228 Class 5

## M12 Slim Design




Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Female Male 21 01 010 00xx 21 01 010 00xx Circular connectors M12, Slim Design, Crimp flange set D1 D2 D3 D4 HARTING offers to test and D5 define the best crimp flange and ferrule combination for customer 21 01 010 0017 3.5 4.5 6.0 6.5 7.5 21 01 010 0018 5.5 6.6 7.5 8.5 4.5 specific cables. 21 01 010 0019 4.5 5.5 6.8 9.0 8.0 21 01 010 0020 5.0 6.0 7.8 9.0 10.0 21 01 010 0021 10.0 10.8 6.5 7.5 8.0 21 01 010 0022 10.0 5.0 6.0 7.4 9.0 21 01 010 0024 5.5 6.5 8.8 10.0 10.8 C03



8

Crimp termination Shielded

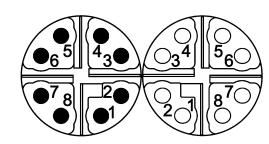

#### Technical characteristics

Number of contacts Rated current 0.5 A Rated voltage 48 V Rated impulse voltage 0.8 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500 Wire outer diameter ≤1.4 mm

Locking type Screw locking, PushPull Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.08 ... 0.25 mm², 0.13 ... 0.25 mm², 0.08 ... 0.22 mm²

Conductor cross-section AWG 28 ... AWG 23, AWG 26 ... AWG 23, AWG 28 ... AWG 24

Cable diameter 5.7 ... 8.8 mm

Transmission characteristics Cat. 6<sub>A</sub>, Class E<sub>A</sub> up to 500 MHz

Tightening torque 0.6 Nm, 2 Nm Lock nut

#### Technical characteristics

Material (insert)

Material (hood/housing)

Material (contacts)

Surface (contacts)

Liquid crystal polymer (LCP)

Zinc die-cast

Copper alloy

Gold plated

RoHS compliant, compliant with

exemption

## Specifications and approvals

IEC 61076-2-109 UL 2238 CYJV2.E302521 CSA-C22.2 No. 182.3 CYJV8.E302521



#### **Details**

For Ethernet applications up to 10 Gbit only

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded	0.08 0.25	21 03 881 1805	21 03 881 2805	complete length when assembled app. 4.6mm  SW15  width across flats: 15  SW14  width across flats: 14
Please order crimp contacts separately.				complete length when assembled app. 42mm  width across flats: 14  width across flats: 15
3				

M12

C03

N	v	п	1	
п	۷	н	-	

C03 12 . 55

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange	0.08 0.25	21 03 881 1807	21 03 881 2807	complete length when assembled app. 40,5  SW15  Width across flats: 15  SW16  Width across flats: 15  Complete length when assembled app. 36,5  SW15  SW15  SW15
separately. Please order crimp flange set separately.				width across flats: 15  SW14 width across flats: 14  Length when assembled age. L6mm
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded	0.08 0.25	21 03 881 1825	21 03 881 2825	vidih across fiats 19  complete Length when assembled app. 42 mm
Please order crimp contacts separately.  Circular connectors M12,	0.08 0.25		21 03 881 2827	width across flats: 19    Indicate   Indicat
Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded, Shield connection with crimp flange				SW18 width across flats:18 SW15 SW15 SW15 SW15 Identification Width across
Please order crimp contacts separately. Please order crimp flange set separately.				



56

Conductor Part number Drawing cross-section (dimensions in mm) Identification (mm<sup>2</sup>) Male Female 0.08 ... 0.25 Circular connectors M12, 21 03 881 3805 21 03 881 4805 length when assembled app. 55 Slim Design, Cable connector, Angled, Crimp termination, Shielded width across flats: 15 Please order crimp contacts separately. length when assembled app. 51 21 03 881 3807 21 03 881 4807 Circular connectors M12, 0.08 ... 0.25 Slim Design, length when assembled app. 51 Cable connector, SW 15 width across Angled, flats: 15 Crimp termination, SW 15 width acros flats: 15 Shielded, Shield connection with crimp flange \$ Please order crimp contacts separately. Please order crimp flange set separately. 0.08 ... 0.22 0.13 ... 0.25 21 01 100 9014 21 01 100 9023 21 01 100 9019 21 01 100 9021 har-speed, Crimp contact, Turned contacts

## M12 Slim Design





Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Female Male 21 01 010 00xx 21 01 010 00xx Circular connectors M12, Slim Design, Crimp flange set D1 D2 D3 D4 HARTING offers to test and D5 define the best crimp flange and ferrule combination for customer 21 01 010 0017 3.5 4.5 6.0 6.5 7.5 21 01 010 0018 5.5 6.6 7.5 8.5 4.5 specific cables. 21 01 010 0019 4.5 5.5 6.8 9.0 8.0 21 01 010 0020 5.0 6.0 7.8 9.0 10.0 21 01 010 0021 10.0 10.8 6.5 7.5 8.0 21 01 010 0022 10.0 5.0 6.0 7.4 9.0 21 01 010 0024 5.5 6.5 8.8 10.0 10.8


M12

C03



8

4 Power + 4 Data Crimp termination Shielded

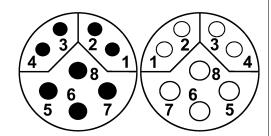

#### Technical characteristics

Number of contacts 6 A Rated current 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree Rated current (data) 0.5 A Insulation resistance >108 Ω ≤10 mΩ Contact resistance Mating cycles ≥100

Locking type PushPull, Screw locking Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.33 ... 0.82 mm², 0.13 ... 0.25 mm²,

0.08 ... 0.22 mm<sup>2</sup>

Conductor cross-section AWG 22 ... AWG 18,

AWG 26 ... AWG 23, AWG 28 ... AWG 24

### Technical characteristics

Cable diameter 5.7 ... 8.8 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-113

#### **Details**

For Fast Ethernet applications only

	Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
	Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, PushPull locking Please order crimp contacts separately.		21 03 861 1830		
	Circular connectors M12, Slim Design, Cable connector, Straight, Crimp termination, Shielded, Screw locking Please order crimp contacts separately.		21 03 861 1814	21 03 861 2805	complete length when assembled app. 40  width across flats 15  complete length when assembled app. 42 mm  width across flats 15  width across flats 15  width across flats 15  width across flats 15
3					



Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Slim Design, Cable connector, Panel feed through, for rear mounting, Crimp termination, Shielded Please order crimp contacts separately.		21 03 861 1825	21 03 861 2825	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.13 0.25 0.33 0.82	21 01 100 9982 21 01 100 9981	21 01 100 9984 21 01 100 9983	17 S
har-speed, Crimp contact, Turned contacts	0.08 0.22 0.13 0.25	21 01 100 9014 21 01 100 9019	21 01 100 9023 21 01 100 9021	
				22
				5
				11.5


C03 12 . 59



4

M12

HARAX® connection technology Shielded



### Technical characteristics

Number of contacts Rated current 4 A 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500 Wire outer diameter ≤1.6 mm Locking type **PushPull** 

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.34 mm², 0.14 mm² Conductor cross-section AWG 22, AWG 26

#### Technical characteristics

Cable diameter 5.7 ... 8.8 mm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101


UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521

#### Part number Drawing (dimensions in mm) Conductor cross-sec-Identification tion (mm²) Male 0.14 21 03 322 1411 Circular connectors M12, 21 03 322 1401 PushPull, 0.34 Cable connector, Straight, HARAX® connection technology, Shielded

Number of contacts

Crimp termination Shielded



#### Technical characteristics

Number of contacts Rated current 4 A 1.5 kV Rated impulse voltage Pollution degree

48 V AC, 60 V DC Rated voltage

>10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Wire outer diameter ≤2.3 mm Locking type **PushPull** 

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

0.13 ... 0.82 mm², Conductor cross-section

0.09 ... 0.25 mm<sup>2</sup>, 0.13 ... 0.33 mm<sup>2</sup>, 0.25 ... 0.52 mm<sup>2</sup>, 0.33 ... 0.82 mm<sup>2</sup>

#### Technical characteristics

AWG 26 ... AWG 18, AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18 Conductor cross-section

Cable diameter 5.7 ... 8.8 mm

Material (insert) Liquid crystal polymer (LCP)

Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy

RoHS compliant with exemption

## Specifications and approvals


IEC 61076-2-101

UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521


Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded	0.13 0.82	21 03 821 1530		complete length when assembled app. 46mm  vidth across flats: 14  vidth across flats: 14
Please order crimp contacts separately.				
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange  Please order crimp contacts separately. Please order crimp flange set separately.	0.13 0.82	21 03 821 1533		SW14 SW15 width across flats: 14 complete length when assembled app. 41



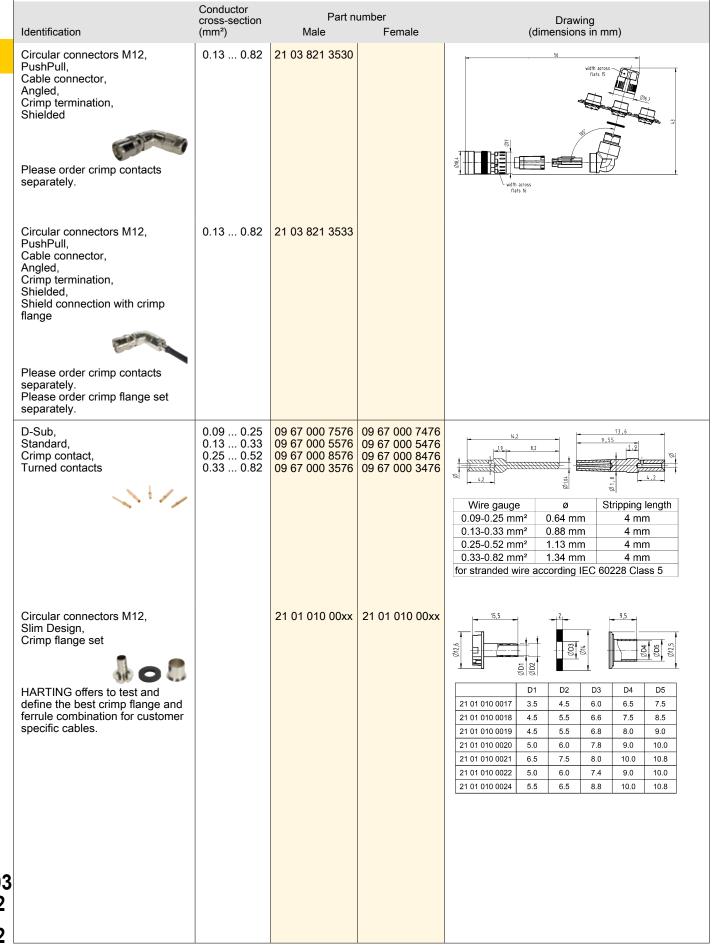



Crimp termination Shielded



#### Technical characteristics

Number of contacts8Rated current2 ARated impulse voltage0.8 kVPollution degree3

Rated voltage 30 V AC, 30 V DC

 $\begin{array}{lll} \text{Insulation resistance} & > 10^8 \ \Omega \\ \text{Contact resistance} & \leq 10 \ \text{m}\Omega \\ \text{Mating cycles} & \geq 500 \\ \text{Wire outer diameter} & \leq 1.65 \ \text{mm} \\ \text{Locking type} & \text{PushPull} \\ \end{array}$ 

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.13 ... 0.33 mm² Conductor cross-section AWG 26 ... AWG 22

#### Technical characteristics

Cable diameter 5.7 ... 8.8 mm

Material (insert) Liquid crystal polymer (LCP)

Material (hood/housing)

Material (contacts)

Zinc die-cast
Copper alloy
Surface (contacts)

Gold plated

RoHS compliant with exemption

## Specifications and approvals


IEC 61076-2-101

UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521


Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded	0.13 0.33	21 03 821 1830		complete length when assembled app. 46mm  vidth across flats: 14
Please order crimp contacts separately.  Circular connectors M12, PushPull, Cable connector,	0.13 0.33	21 03 821 1833		complete length when assembled app. 41
Straight, Crimp termination, Shielded, Shield connection with crimp flange				SW14 width across flats: 14
Please order crimp contacts separately.				
Please order crimp flange set separately.				



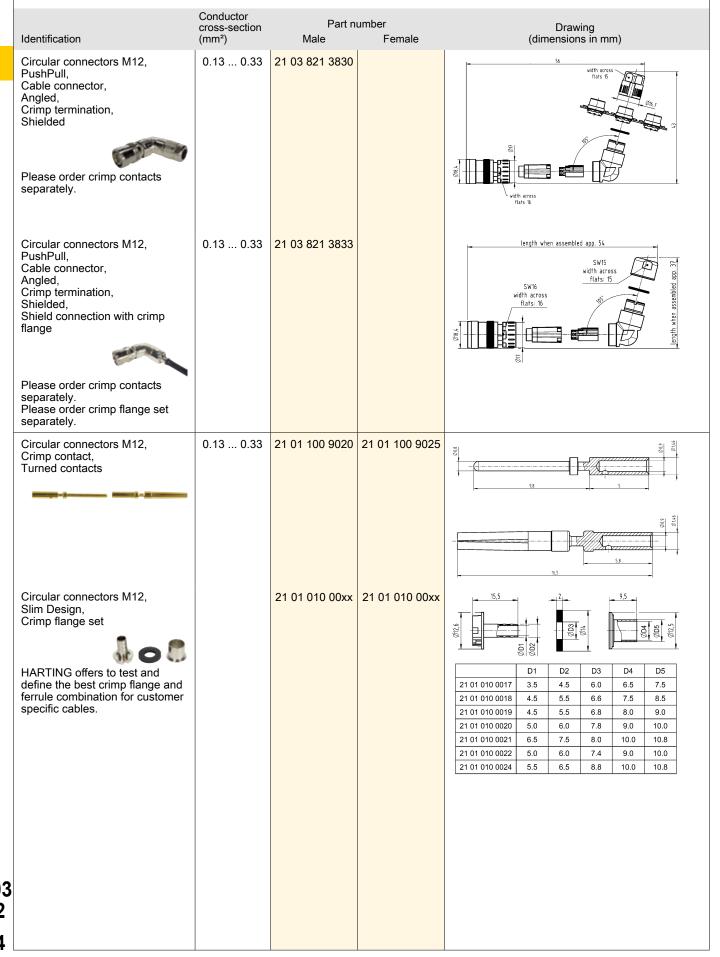

Number of contacts

HARAX® connection technology



#### Technical characteristics

Number of contacts 4 A Rated current 50 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500 Wire outer diameter ≤1.6 mm Locking type **PushPull** 

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

0.34 mm<sup>2</sup>, 0.14 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 22, AWG 26 Cable diameter 5.7 ... 8.8 mm

Transmission characteristics

Material (insert) Material (hood/housing) Cat. 5, Class D up to 100 MHz

Polyamide (PA) Zinc die-cast

#### Technical characteristics

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521



#### **Details**


Identification	Conductor cross-section (mm²)	Part number Male	Drawing (dimensions in mm)
Circular connectors M12, PushPull, Cable connector, Straight, HARAX® connection technology, Shielded	0.14 0.34	21 03 382 1411 21 03 382 1401	46mm 5W15



4

M12

Crimp termination Shielded



## Technical characteristics

Number of contacts 4
Rated current 4 A
Rated impulse voltage 1.5 kV
Pollution degree 3

Rated voltage 48 V AC, 60 V DC

 Insulation resistance
 >108 Ω

 Contact resistance
 ≤10 mΩ

 Mating cycles
 ≥500

 Wire outer diameter
 ≤2.3 mm

 Locking type
 PushPull

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.13 ... 0.82 mm², 0.09 ... 0.25 mm²,

0.13 ... 0.33 mm², 0.25 ... 0.52 mm², 0.33 ... 0.82 mm²

Conductor cross-section AWG 26 ... AWG 18,

AWG 28 ... AWG 24, AWG 26 ... AWG 22, AWG 24 ... AWG 20, AWG 22 ... AWG 18

#### Technical characteristics

Cable diameter 5.7 ... 8.8 mm

Transmission characteristics Cat. 5, Class D up to 100 MHz Material (insert) Liquid crystal polymer (LCP)

Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy

RoHS compliant with exemption

## Specifications and approvals

IEC 61076-2-101 UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521




#### **Details**

For Fast Ethernet applications only

		· ·	·	
Identification	Conductor cross-section (mm²)	Part ni Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded	0.13 0.82	21 03 881 1430		complete length when assembled app. 46mm  special printing  SW14  width across flats: 14  width across flats: 15
Please order crimp contacts separately.				
Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange	0.13 0.82	21 03 881 1433		
Please order crimp contacts separately. Please order crimp flange set separately.				

C0:

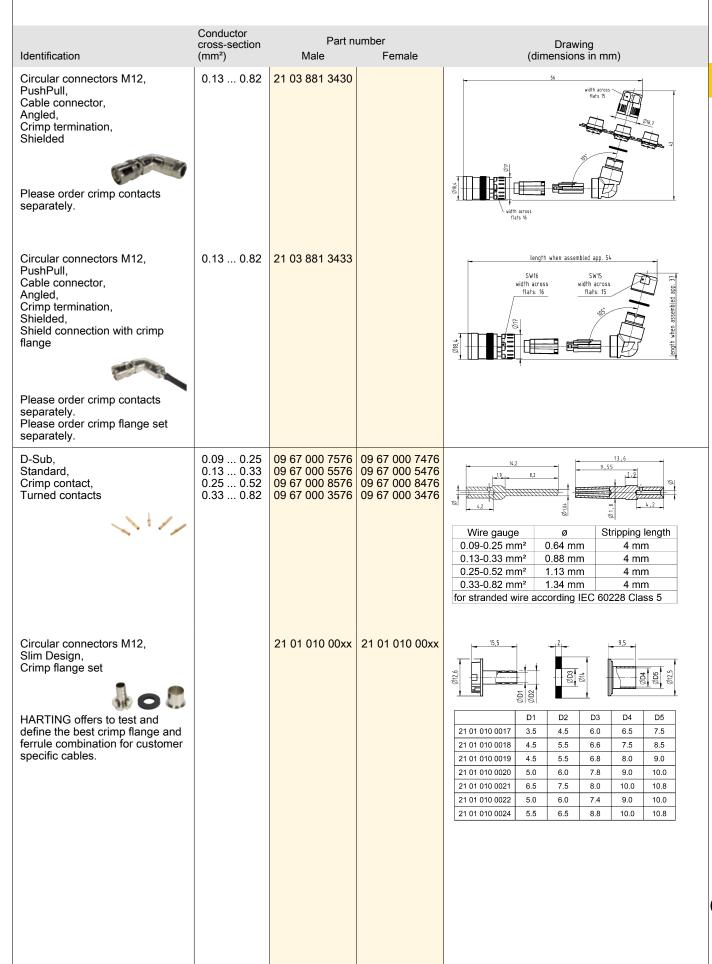




8

M12

Crimp termination Shielded



### Technical characteristics

Number of contacts Rated current 0.5 A Rated voltage 48 V Rated impulse voltage 0.8 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500 Wire outer diameter ≤1.4 mm Locking type **PushPull** 

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.08 ... 0.25 mm², 0.13 ... 0.25 mm²,

0.08 ... 0.22 mm<sup>2</sup>

Conductor cross-section AWG 28 ... AWG 23,

AWG 26 ... AWG 23, AWG 28 ... AWG 24

Cable diameter 5.7 ... 8.8 mm

 $\label{eq:Cat.6A} Transmission characteristics \qquad \text{Cat. 6A, Class E}_{A} \text{ up to 500 MHz}$ 

#### Technical characteristics

Material (insert) Liquid crystal polymer (LCP)

Material (hood/housing)

Material (contacts)

Surface (contacts)

Zinc die-cast
Copper alloy

Gold plated

RoHS compliant with exemption

# Specifications and approvals

IEC 61076-2-109 UL 2238 CYJV2.E302521

CSA-C22.2 No. 182.3 CYJV8.E302521



#### **Details**

For Ethernet applications up to 10 Gbit only

	Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
	Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded	0.08 0.25	21 03 881 1830		complete length when assembled app. 46mm  SW15  SW15  width across flats: 14
	Please order crimp contacts separately.				
	Circular connectors M12, PushPull, Cable connector, Straight, Crimp termination, Shielded, Shield connection with crimp flange	0.08 0.25	21 03 881 1833		complete length when assembled app. 41  SW14 width across flats: 14  SW5 Flats: 15
3	Please order crimp contacts separately. Please order crimp flange set separately.				

C03 12 68



Conductor Part number Drawing cross-section (dimensions in mm) Identification (mm²) Male Female 21 03 881 3830 Circular connectors M12,  $0.08 \dots 0.25$ PushPull, Cable connector, Angled, Crimp termination, Shielded Please order crimp contacts separately. Circular connectors M12, 0.08 ... 0.25 21 03 881 3833 PushPull, Cable connector, Angled, Crimp termination, Shielded, Shield connection with crimp flange Please order crimp contacts separately.
Please order crimp flange set separately. 21 01 100 9014 21 01 100 9023 21 01 100 9019 21 01 100 9021  $0.08 \dots 0.22$ har-speed, 0.13 ... 0.25 Crimp contact, Turned contacts Circular connectors M12, 21 01 010 00xx 21 01 010 00xx Slim Design, Crimp flange set D1 D2 D3 D4 D5 HARTING offers to test and define the best crimp flange and 21 01 010 0017 3.5 4.5 6.0 6.5 7.5 ferrule combination for customer 21 01 010 0018 7.5 4.5 5.5 6.6 8.5 specific cables. 21 01 010 0019 4.5 5.5 6.8 8.0 9.0 21 01 010 0020 6.0 7.8 9.0 10.0 5.0 21 01 010 0021 8.0 10.8 6.5 7.5 10.0 21 01 010 0022 5.0 6.0 7.4 9.0 10.0 21 01 010 0024 5.5 6.5 10.0 10.8 8.8









#### Technical characteristics

Number of contacts Rated current 12 A 630 V Rated voltage Rated impulse voltage 6 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Locking type PushPull

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section

0.5 ... 2.5 mm², 2.5 mm², 1.5 mm², 0.75 mm², 0.5 mm²

#### Technical characteristics

Conductor cross-section AWG 20 ... AWG 14, AWG 14, AWG 16, AWG 19, AWG 21

Cable diameter 5.8 ... 13.5 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated

### Specifications and approvals


IEC 61076-2-111

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, PushPull, Cable connector, Straight, Crimp termination, Shielded, PushPull locking	0.5 2.5	21 03 896 1525	21 03 896 2525	camplete length when assembled upp \$27mm  seal insert, red  Ottom  width across flats 17  Seal insert, green  Otto, Simm  seal insert, black  Øren
Please order crimp contacts separately.				
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents:	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9939	
50 pieces				(21,80).)
3				8°-02 0,9°-0,55 0,2 0,0 0,0 0,0 0,0 0,0 0,0 0,0 0,0 0,0
				12,346,65

Number of contacts

4

Crimp termination Shielded

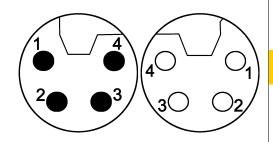

#### Technical characteristics

Number of contacts 16 A Rated current Rated voltage 63 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500 Locking type PushPull

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 2.5 mm², 1.5 mm², 0.75 mm²,

0.5 mm<sup>2</sup>

Conductor cross-section AWG 14, AWG 16, AWG 19,

AWG 21

A . . . . . . . . .

# **Technical characteristics**

Cable diameter 5.8 ... 13.5 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated

### Specifications and approvals




Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, PushPull, Cable connector, Straight, Crimp termination, Shielded, PushPull locking Please order crimp contacts separately.		21 03 896 1420	21 03 896 2420	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938		73.4 73.6







Crimp termination Shielded



#### Technical characteristics

Number of contacts 16 A Rated current Rated voltage 63 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Locking type PushPull

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section

2.5 mm<sup>2</sup>, 1.5 mm<sup>2</sup>, 0.75 mm<sup>2</sup>,

0.5 mm<sup>2</sup>

Conductor cross-section AWG 14, AWG 16, AWG 19,

AWG 21

#### Technical characteristics

Cable diameter5.8 ... 13.5 mmTightening torque0.6 NmMaterial (insert)Polyamide (PA)Material (hood/housing)Zinc die-castMaterial (contacts)Copper alloySurface (contacts)Gold plated


### Specifications and approvals



Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, PushPull, Cable connector, Straight, Crimp termination, Shielded, PushPull locking Please order crimp contacts separately.		21 03 896 1520	21 03 896 2520	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9964 21 01 100 9965 21 01 100 9939 21 01 100 9940	25. (2) (3) (3) (4) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4

3+ 🖶

Crimp termination Shielded

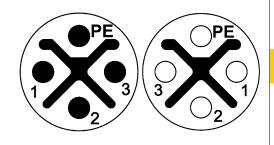

#### Technical characteristics

Number of contacts 3 Rated current 12 A Rated voltage 630 V Rated impulse voltage 6 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500 Locking type PushPull

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 2.5 mm², 1.5 mm², 0.75 mm²,

0.5 mm<sup>2</sup>

### Technical characteristics

Conductor cross-section AWG 14, AWG 16, AWG 19,

AWG 21

Cable diameter 5.8 ... 13.5 mm

Tightening torque 0.6 Nm

Material (insert)Polyamide (PA)Material (hood/housing)Zinc die-castMaterial (contacts)Copper alloySurface (contacts)Gold plated

### Specifications and approvals


Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, PushPull, Cable connector, Straight, Crimp termination, Shielded, PushPull locking Please order crimp contacts separately.		21 03 896 1425	21 03 896 2425	complete length when assembled app. 52mm  Seal insert, blue  Only Thin Seal insert, green  Only Thin Seal insert, blue  Only Thin Seal insert, green  Only Thin Seal insert, green
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9963	21 01 100 9964 21 01 100 9965 21 01 100 9939 21 01 100 9940	21 8 8 6 1 5 6 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1







Crimp termination Shielded

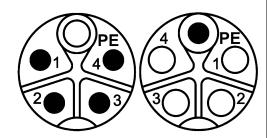

#### Technical characteristics

Locking type Screw locking
Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.5 ... 2.5 mm², 2.5 mm²,

1.5 mm<sup>2</sup>, 0.75 mm<sup>2</sup>, 0.5 mm<sup>2</sup>

#### Technical characteristics

Conductor cross-section AWG 20 ... AWG 14, AWG 14, AWG 16, AWG 19, AWG 21

Cable diameter 5.8 ... 13.5 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated


# Specifications and approvals

IEC 61076-2-111

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, Cable connector, Straight, Crimp termination, Shielded, Screw locking	0.5 2.5	21 03 896 1515	21 03 896 2515	cample's length when assentled app 52mm  Seal insert, red  With across flats 17 seal insert, green  With across flats 18 seal insert, black  with across flats 18 seal insert, black
Please order crimp contacts separately.				SW18 Øffen
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9965 21 01 100 9939	
				(21,8m) (21,8m) (31,5 <sub>4,0</sub> ) (41,5 <sub>4,0</sub> ) (51,5 <sub>4,0</sub> ) (61,5 <sub>4,0</sub> ) (71,5 <sub>4,0</sub> )
3				0,8 12,349,85 12,349,85

Number of contacts

HARAX® connection technology Shielded

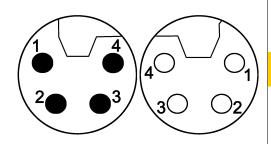

#### Technical characteristics

Number of contacts 12 A Rated current Rated voltage 63 V Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥100 Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.75 ... 1.5 mm<sup>2</sup> AWG 18 ... AWG 16 Conductor cross-section Cable diameter 5.8 ... 13.5 mm 0.6 Nm

Tightening torque

### Technical characteristics

Material (insert) Polyamide (PA) Colour (insert) Black Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Gold plated Surface (contacts) RoHS compliant

### Specifications and approvals




Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, Cable connector, Straight, HARAX® connection technology, Shielded	0.75 1.5	21 03 296 1506	21 03 296 2506	SOURCE LINES NOT ANABOLIS SO 3300
				1000/CT angly, then averaged on 1200



4

Crimp termination Shielded

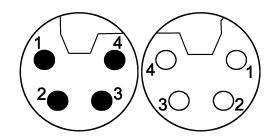

#### Technical characteristics

 Number of contacts
 4

 Rated current
 16 A

 Rated voltage
 63 V

 Rated impulse voltage
 1.5 kV

 Pollution degree
 3

 Insulation resistance
 >108 Ω

 Contact resistance
 ≤10 mΩ

 Mating cycles
 ≥500

 Locking type
 Screw locking

Locking type Screw locking
Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 2.5 mm², 1.5 mm², 0.75 mm²,

0.5 mm<sup>2</sup>

Conductor cross-section AWG 14, AWG 16, AWG 19,

AWG 21

### Technical characteristics

Cable diameter 5.8 ... 13.5 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated

### Specifications and approvals


IEC 61076-2-111



Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, Cable connector, Straight, Crimp termination, Shielded, Screw locking Please order crimp contacts separately.		21 03 896 1410	21 03 896 2410	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9965	17.3 Halls (1) 18.4 (



HARAX® connection technology Shielded

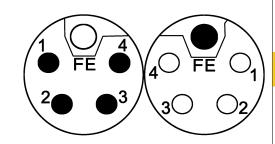

#### Technical characteristics

Number of contacts 12 A Rated current 63 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥100 Mating cycles

Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 0.75 ... 1.5 mm<sup>2</sup> AWG 18 ... AWG 16 Conductor cross-section Cable diameter 5.8 ... 13.5 mm

Tightening torque 0.6 Nm

#### Technical characteristics

Material (insert) Polyamide (PA) Colour (insert) Grey Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Gold plated Surface (contacts) **RoHS** compliant


### Specifications and approvals

IEC 61076-2-111




# Conductor Part number cross-section Drawing Identification (dimensions in mm) (mm<sup>2</sup>) Male Female Circular connectors M12, 0.75 ... 1.5 21 03 296 1505 21 03 296 2505 Power, Cable connector, Straight, *HARAX*® connection technology, Shielded





Crimp termination Shielded

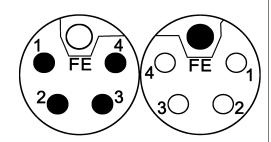

#### Technical characteristics

Number of contacts 16 A Rated current 63 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section

0.5 ... 2.5 mm<sup>2</sup>, 2.5 mm<sup>2</sup>, 1.5 mm², 0.75 mm², 0.5 mm²

Conductor cross-section

AWG 20 ... AWG 14, AWG 14, AWG 16, AWG 20, AWG 21

5.8 ... 13.5 mm Cable diameter 0.6 Nm

Tightening torque

#### Technical characteristics

Material (insert) Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant, compliant with

exemption

### Specifications and approvals

IEC 61076-2-111 UL 2238 CYJV2.E302521 CSA-C22.2 No. 182.3 CYJV8.E302521



Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, Cable connector, Straight, Crimp termination, Shielded	0.5 2.5	21 03 896 1505	21 03 896 2505	conplete length when assembled app. 53mm  SW17  SW20  SW17
Please order crimp contacts separately.				complete length when assembled approx. 52mm
Circular connectors M12, Power, Crimp contact, 23.2 mm length, Turned contacts	0.5 0.75 1.5 2.5	21 01 100 9923 21 01 100 9924 21 01 100 9925 21 01 100 9926	21 01 100 9932 21 01 100 9933	23,2

# M12 Power

L-coding




Conductor cross-section (mm²) Part number Drawing (dimensions in mm) Identification Male Female 0.5 0.75 1.5 2.5 21 01 100 9927 21 01 100 9928 21 01 100 9929 21 01 100 9930 Circular connectors M12, Power, Crimp contact, FE contact, 24.8 mm length, Turned contacts 24,8 use with M12 Power female contacts





Crimp termination Shielded

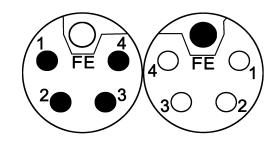

#### Technical characteristics

Number of contacts 16 A Rated current Rated voltage 63 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ ≥500 Mating cycles Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section

2.5 mm<sup>2</sup>, 1.5 mm<sup>2</sup>, 0.75 mm<sup>2</sup>,

0.5 mm<sup>2</sup>

Conductor cross-section AWG 14, AWG 16, AWG 19,

AWG 21

### Technical characteristics

Cable diameter 5.8 ... 13.5 mm
Tightening torque 0.6 Nm
Material (insert) Polyamide (PA)
Material (hood/housing) Zinc die-cast
Material (contacts) Copper alloy
Surface (contacts) Gold plated

### Specifications and approvals


IEC 61076-2-111



Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, Cable connector, Straight, Crimp termination, Shielded, Screw locking Please order crimp contacts separately.		21 03 896 1510	21 03 896 2510	
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents: 50 pieces	0.5 0.75 1.5 2.5	21 01 100 9962 21 01 100 9963 21 01 100 9937 21 01 100 9938	21 01 100 9965	78.4.2 (3).5.4.3.5 (3).5.5.5 (3).5.5 (3).5.5 (3).5.5 (3).5.5 (3).5.5 (3).5.5 (3).5.5 (3).5

Number of contacts

Crimp termination Shielded

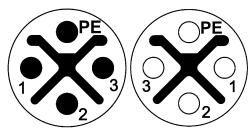

#### Technical characteristics

Number of contacts 3 Rated current 12 A Rated voltage 630 V Rated impulse voltage 6 kV Pollution degree 3 >10<sup>8</sup> Ω Insulation resistance Contact resistance ≤10 mΩ Mating cycles ≥500

Locking type Screw locking

Degree of protection acc. to IEC IP65 / IP67, when mated

60529

Conductor cross-section 2.5 mm<sup>2</sup>, 1.5 mm<sup>2</sup>, 0.75 mm<sup>2</sup>,

0.5 mm<sup>2</sup>

### Technical characteristics

Conductor cross-section AWG 14, AWG 16, AWG 19,

AWG 21

Cable diameter 5.8 ... 13.5 mm Tightening torque 0.6 Nm

Material (insert)

Polyamide (PA) Material (hood/housing) Zinc die-cast Material (contacts) Copper alloy Surface (contacts) Gold plated

### Specifications and approvals

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M12, Power, Cable connector, Straight, Crimp termination, Shielded, Screw locking		21 03 896 1415	21 03 896 2415	condicte length when asserthind ago 52en soil insert, filtra Sit insert, stata with across flats 18 Set insert, green 29(3) the Set insert, green 29(3) the
Please order crimp contacts separately.				voth across flats 18  with across flats 19  with across flats 19
Circular connectors M12, Power, Crimp contact, Turned contacts, Pack contents:	0.5 0.75 1.5 2.5	21 01 100 9963 21 01 100 9937	21 01 100 9964 21 01 100 9965 21 01 100 9939 21 01 100 9940	
50 pieces				(21,841)
				0.8 4.25 1.1 1.9 94.05 2.3 2.2 2.3 3.3 3.3 3.3 3.3 3.3 3.3 3.3
				12,349.85

# Technical characteristics


Mating cycles Locking type ≥100 PushPull

compliant, compliant with exemption RoHS

# Specifications and approvals



Identification	Part nu Male	mber Female	Drawing (dimensions in mm)
Circular connectors M12, M12-male moving load, A-coding	21 03 030 1400		42
Circular connectors M12, Unshielded, T-splitter, A-coding	21 03 319 9501		5 10 2 M 2 10 M 2 M 2 M 2 M 2 M 2 M 2 M 2 M 2 M 2 M
Circular connectors M12, Unshielded, Y-splitter, A-coding	21 03 321 9400		45

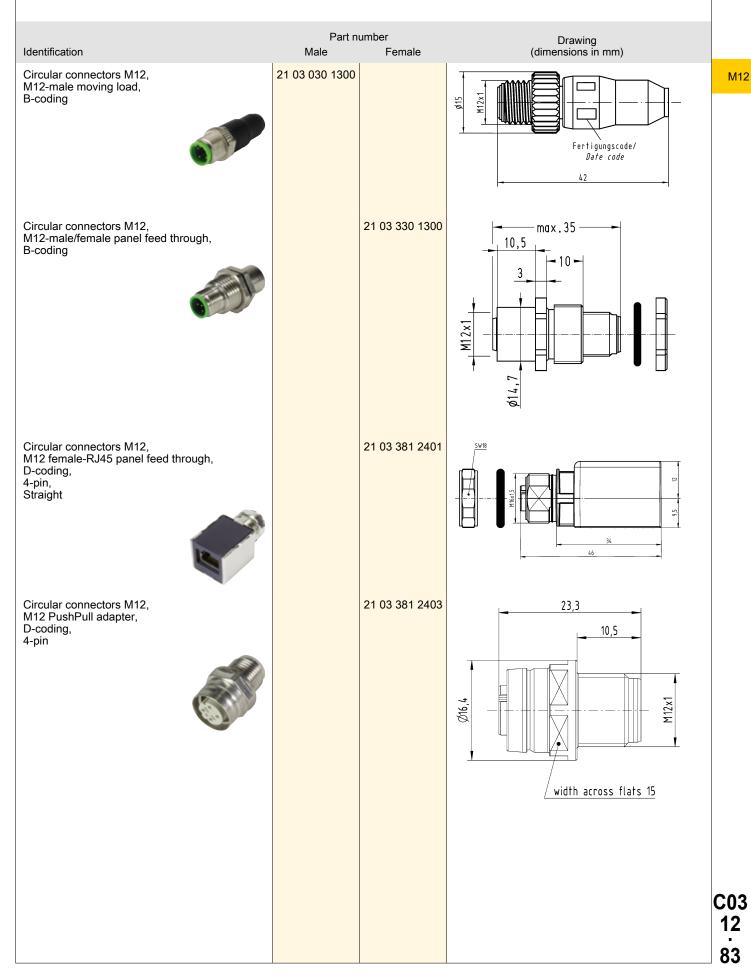

# Adapter



	Identification	Part number Male Female	Drawing (dimensions in mm)
M12	Circular connectors M12, M12 female-RJ45 panel feed through, D-coding, 4-pin, Angled	21 03 381 4401	SW18  50 34
	Circular connectors M12, har-speed M12 adapter M12-RJ45, X-coding, Straight, Cat. 6 <sub>A</sub>	21 03 381 2800	SW18 width across flats
	Circular connectors M12, har-speed M12 adapter M12-RJ45, X-coding, Angled, Cat. 6A	21 03 381 4800	SW18  SW18
C03 12 84			

#### Technical characteristics

Locking type Material (accessories) Colour (accessories)

RoHS

PushPull, Screw locking Thermoplastic Black


compliant

compliant with exemption,

# Specifications and approvals

UL 2238 CYJV2.E302521 CSA-C22.2 No. 182.3 CYJV8.E302521



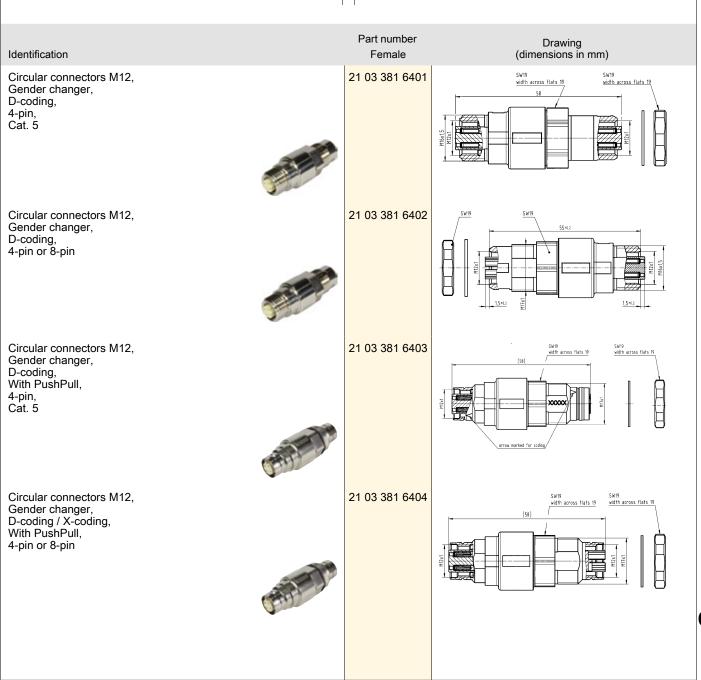

# Adapter

M12



Part number Drawing (dimensions in mm) Identification Female Circular connectors M12, Gender changer, X-coding, Cat. 6<sub>A</sub> 21 03 381 6815 \SW19 <u>SW19</u> Circular connectors M12, Gender changer, 21 03 381 6816 X-coding, With PushPull, Cat. 6<sub>A</sub> Circular connectors M12, Panel mounting parts 21 01 000 0036 (50) C03 86

### Technical characteristics

RoHS

compliant with exemption

#### Identification


Circular connectors M12, Slim Design, Crimp flange set



HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.

#### Part number

# Drawing (dimensions in mm)



	D1	D2	D3	D4	D5
21 01 010 0017	3.5	4.5	6.0	6.5	7.5
21 01 010 0018	4.5	5.5	6.6	7.5	8.5
21 01 010 0019	4.5	5.5	6.8	8.0	9.0
21 01 010 0020	5.0	6.0	7.8	9.0	10.0
21 01 010 0021	6.5	7.5	8.0	10.0	10.8
21 01 010 0022	5.0	6.0	7.4	9.0	10.0
21 01 010 0024	5.5	6.5	8.8	10.0	10.8

### Technical characteristics

Material (accessories)

Thermoplastic

# Technical characteristics

Colour (accessories) RoHS Black compliant

Circular connectors M12, M12-S, Seal, Unshielded  Circular connectors M12, M2-L, Seal, Unshielded  Circular connectors M12, M3-L, Seal, Unshielded  Circular connectors M12, M3-L, Seal, Seal, Shielded  Circular connectors M12, M3-L, Seal, Shielded  Circular connectors M12, M3-L, Seal, Shielded  4.5 8.8  21 01 010 2017	Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Seal, Unshielded  6 8  21 01 010 2007  Circular connectors M12, M12-L, Set of seals, Shielded  4.5 8.8  21 01 010 2017	M12-S, Seal,	2.9 4 4 5.1	21 01 010 2011 21 01 010 2001	12
Circular connectors M12, M12-L, Set of seals, Shielded  4.5 8.8  21 01 010 2017	M12-L, Seal,	4.7 6 6 8	21 01 010 2015 21 01 010 2007	
M12-L, Set of seals, Shielded				10,7
	M12-L, Set of seals,	4.5 8.8	21 01 010 2017	

# Accessories



Drawing (dimensions in mm) Identification Cable diameter (mm) Part number Circular connectors M12, Slim Design, Set of seals, Shielded 4.5 ... 8.8 5.7 ... 8.8 21 01 010 2038 21 01 010 2028 67,5 C03


M12

. 89

### Technical characteristics

### Technical characteristics

Material (accessories) Colour (accessories) RoHS Thermoplastic Black compliant

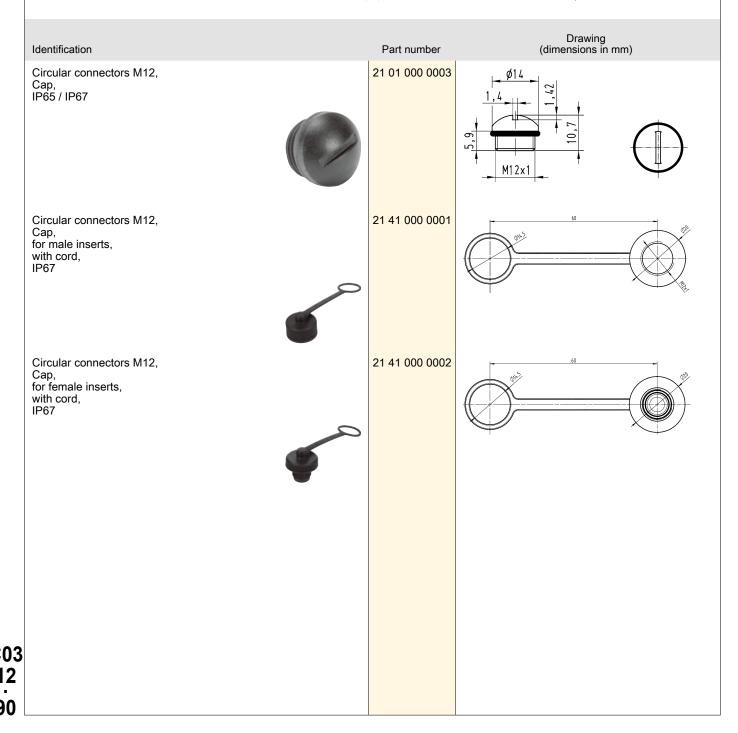

# Technical characteristics

Degree of protection acc. to IEC IP65 / IP67 60529

# Technical characteristics

Material (accessories) RoHS Metal compliant with exemption

Identification	Part number	Drawing (dimensions in mm)
Circular connectors M12, Cap, for female inserts, with cord	21 01 000 0030	S (5)
Circular connectors M12, Cap, for female inserts, with cable clip	21 01 000 0031	19a
Circular connectors M12, Cap, for male inserts, with cord	21 01 000 0033	(6.1)
Circular connectors M12, Cap, for male inserts, with cable clip	21 01 000 0038	50.1 The state of



Contents	Page	
M23 Signal inserts	C03 23.2	ı
M23 Signal contacts	C03 23.16	
M23 Signal Hoods/Housings	C03 23.17	
M23 Power inserts	C03 23.20	
M23 Power contacts	C03 23.25	
M23 Power Hoods/Housings	C03 23.26	
		C( 2
		;


C03 23 1



Number of contacts



Crimp termination

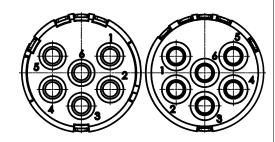

### Technical characteristics

Conductor cross-section 0.75 ... 2.5 mm² Material (insert) Polyamide (PA)

### Technical characteristics

Colour (insert) White Material flammability class acc. V-0

to UL 94

RoHS compliant

# Specifications and approvals

UL 1977 ECBT2.E235076


Waterial (moort)	r oryannae (r 71)	l	ı		
Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawii (dimensions	ng s in mm)
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 6x 2 mm	0.75 2.5	09 15 106 3001	1	20,1	Ø17 —



Number of contacts



Solder termination

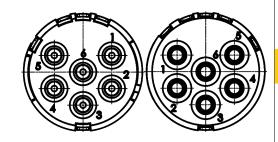

### Technical characteristics

Number of contacts 20 A Rated current Rated voltage 300 V Rated impulse voltage  $2.5 \, kV$ Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles Conductor cross-section 2.5 mm² max. Material (insert) Polyamide (PA) Colour (insert) White

### Technical characteristics

Material (contacts) Copper alloy Gold plated Surface (contacts) Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

# Specifications and approvals

UL 1977 ECBT2.E235076


Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in	mm)
Circular connectors M23, Signal, Inserts, Solder termination	2.5 max.	09 15 106 2602	09 15 106 2702	7,5	Ø17 —
				(22,2) 18,5 3,7	Ø17 —



Number of contacts

7

Crimp termination

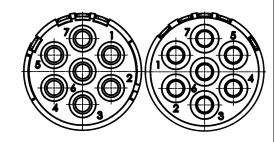

### Technical characteristics

Conductor cross-section 0.75 ... 2.5 mm²
Material (insert) Polyamide (PA)

### Technical characteristics

Colour (insert) White Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

### Specifications and approvals

UL 1977 ECBT2.E235076


iviaterial (ilisert)	Folyamide (FA)	ı	I		
Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Draw (dimension	ing s in mm)
Circular connectors M23, Signal, Inserts, Crimp termination	0.75 2.5	09 15 107 3001	09 15 107 3101	11,6 -	Ø17 —
Please order crimp contacts separately. 7x 2 mm				20,1	Ø17 —
3					



Number of contacts

7

Solder termination

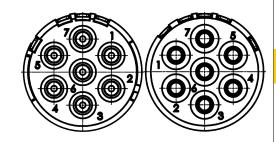

#### Technical characteristics

Number of contacts 20 A Rated current 300 V Rated voltage Rated impulse voltage 2.5 kV Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C Mating cycles ≥500 Conductor cross-section 2.5 mm<sup>2</sup> max. Material (insert) Polyamide (PA) Colour (insert) White

### Technical characteristics

Material (contacts)

Surface (contacts)

Gold plated


Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

### Specifications and approvals

UL 1977 ECBT2.E235076

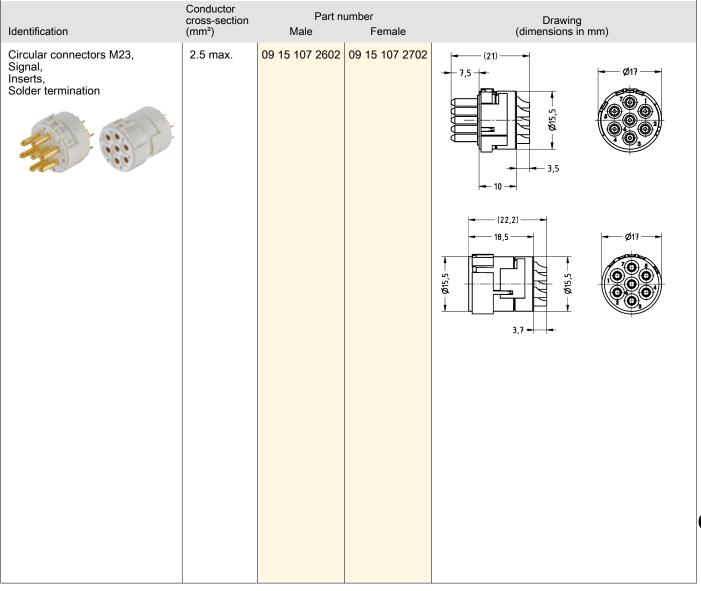




Number of contacts

8

+ 1 additional special contact Crimp termination

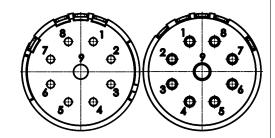

#### Technical characteristics

Number of contacts

Additional contacts + 1 additional special contact

Rated current 8 A
Rated voltage 200 V
Rated impulse voltage 2.5 kV
Pollution degree 3
Rated current (special contact) 20 A
Rated voltage (special contact) 200 V
Rated impulse voltage (special 2.5 kV contact)

Pollution degree (special

contact)

Insulation resistance  $>10^{10} \Omega$ 

### Technical characteristics

Limiting temperature -40 ... +125 °C

Mating cycles ≥500

Conductor cross-section 0.08 ... 1.5 mm² Material (insert) Polyamide (PA)

Colour (insert) White Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

# Specifications and approvals

UL 1977 ECBT2.E235076


Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawi (dimension:	ng s in mm)
Circular connectors M23, Signal, Inserts, Crimp termination	0.08 1.5	09 15 109 3001	09 15 109 3101	12	Ø17  • • • • • • • • • • • • • • • • • • •
Please order crimp contacts separately. 8x 1 mm 1x 2 mm				20 - 5'5'8	Ø17  2
3					



Number of contacts

8

+ 1 additional special contact Solder termination

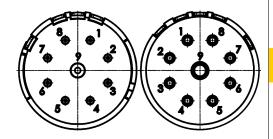

#### Technical characteristics

Number of contacts

Additional contacts + 1 additional special contact

Rated current 8 A
Rated voltage 200 V
Rated impulse voltage 2.5 kV
Pollution degree 3
Rated current (special contact) 20 A
Rated voltage (special contact) 200 V
Rated impulse voltage (special contact) 2.5 kV
contact)

Pollution degree (special

contact)

Insulation resistance  $>10^{10} \Omega$ Limiting temperature  $-40 \dots +125 ^{\circ} C$ 

#### Technical characteristics

Mating cycles≥500Conductor cross-section1 mm² max.Material (insert)Polyamide (PA)Colour (insert)WhiteMaterial (contacts)Copper alloy


Surface (contacts) Gold plated
Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

### Specifications and approvals

UL 1977 ECBT2.E235076

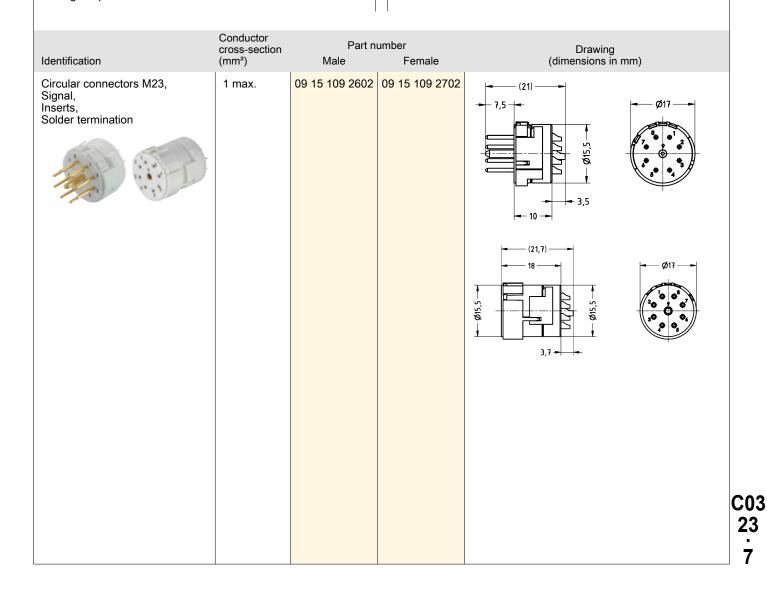




Number of contacts

11+ 😩

Crimp termination

M23

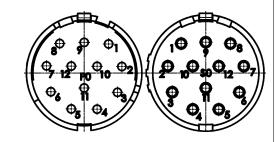

#### Technical characteristics

Conductor cross-section 0.08 ... 1.5 mm²
Material (insert) Polyamide (PA)

Conductor

cross-section (mm²)

0.08 ... 1.5

### Technical characteristics

Colour (insert) Grey Material flammability class acc. V-0

to UL 94

Female

Part number

Male


RoHS compliant with exemption


### Specifications and approvals

UL 1977 ECBT2.E235076

Identification
Circular connectors M23, Signal, Inserts, Crimp termination





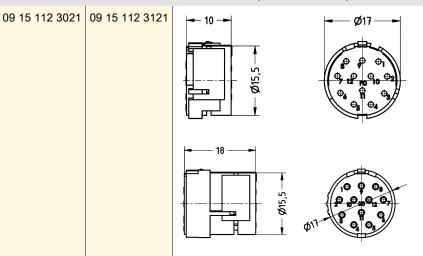

Drawing


(dimensions in mm)

# M23 Signal inserts



Number of contacts

Solder termination

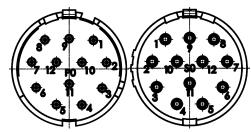

### Technical characteristics

Number of contacts Rated current 8 A Rated voltage 200 V Rated impulse voltage 2.5 kV Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C ≥500 Mating cycles Conductor cross-section 1 mm² max. Material (insert) Polyamide (PA) Grey

Colour (insert)

### Technical characteristics

Material (contacts) Copper alloy Gold plated Surface (contacts)

Material flammability class acc.

to UL 94

RoHS compliant with exemption

# Specifications and approvals


UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in t	mm)
Identification  Circular connectors M23, Signal, Inserts, Solder termination	1 max.	Male 09 15 112 2622		(dimensions in 1	Ø17



Number of contacts

Crimp termination

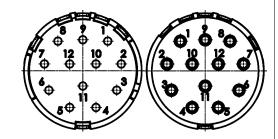

### Technical characteristics

Number of contacts 8 A Rated current Rated voltage 200 V Rated impulse voltage 2.5 kV Pollution degree Insulation resistance  $>10^{10} \Omega$ -40 ... +125 °C Limiting temperature ≥500 Mating cycles

Conductor cross-section 0.08 ... 1.5 mm<sup>2</sup> Material (insert) Polyamide (PA)

### Technical characteristics

Colour (insert) White Material flammability class acc. V-0 to UL 94

RoHS compliant with exemption,

compliant

# Specifications and approvals

UL 1977 ECBT2.E235076


Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawii (dimensions	ng in mm)
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 12x 1 mm	0.08 1.5	09 15 112 3001	09 15 112 3101	19,6	Ø17
Circular connectors M23, Signal, Inserts, Marking in opposite direction, Crimp termination Please order crimp contacts separately. 12x 1 mm	0.08 1.5	09 15 112 3011	09 15 112 3111		



Number of contacts

12

Solder termination

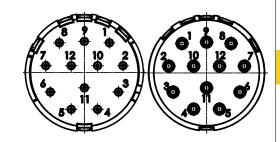

#### Technical characteristics

Number of contacts 12 Rated current 8 A 200 V Rated voltage Rated impulse voltage 2.5 kV Pollution degree  $>10^{10} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C Mating cycles ≥500 Conductor cross-section 1 mm<sup>2</sup> max. Material (insert) Polyamide (PA) Colour (insert) White

### Technical characteristics

Material (contacts)

Surface (contacts)

Gold plated

Material flammability class acc. V-0


to UL 94

RoHS compliant with exemption,

compliant

# Specifications and approvals


UL 1977 ECBT2.E235076

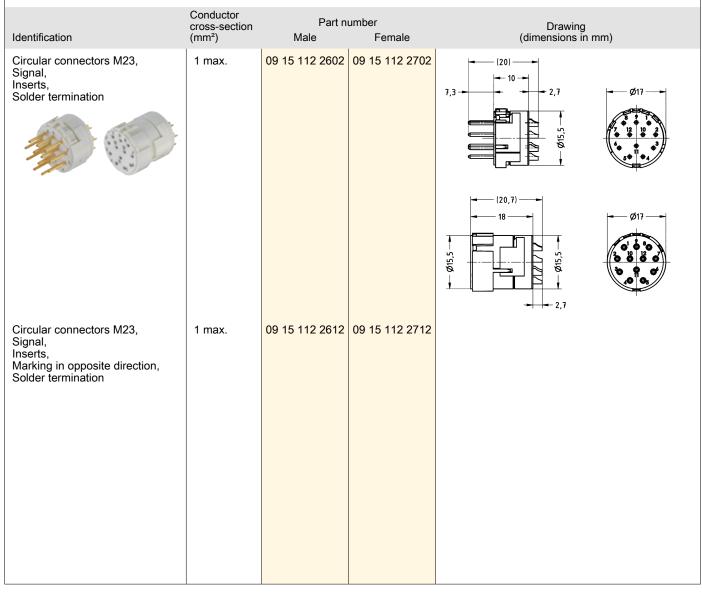



Number of contacts

Crimp termination

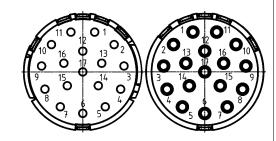

### Technical characteristics

Number of contacts 8 A Rated current Rated voltage 160 V Rated impulse voltage 1.5 kV Pollution degree >10<sup>6</sup> Ω Insulation resistance -40 ... +125 °C Limiting temperature ≥500 Mating cycles

Conductor cross-section 0.08 ... 1.5 mm<sup>2</sup> Material (insert) Polyamide (PA)

### Technical characteristics

Colour (insert) White Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

### Specifications and approvals

UL 1977 ECBT2.E235076


Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M23, Signal, Inserts, Crimp termination  Please order crimp contacts separately. 17x 1 mm	0.08 1.5	09 15 117 3001	09 15 117 3101	917 917 918 919 919 919 919 919 919 919
17x 1 mm				19,6 — Ø17 —



Number of contacts

17

Solder termination

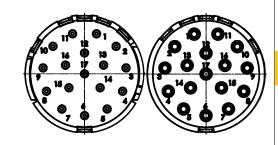

#### Technical characteristics

Number of contacts 8 A Rated current 160 V Rated voltage Rated impulse voltage 1.5 kV Pollution degree 3 >10<sup>6</sup> Ω Insulation resistance Limiting temperature -40 ... +125 °C Mating cycles ≥500 Conductor cross-section 1 mm<sup>2</sup> max. Material (insert) Polyamide (PA) Colour (insert) White

### Technical characteristics

Material (contacts)

Surface (contacts)


Gold plated

Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

### Specifications and approvals

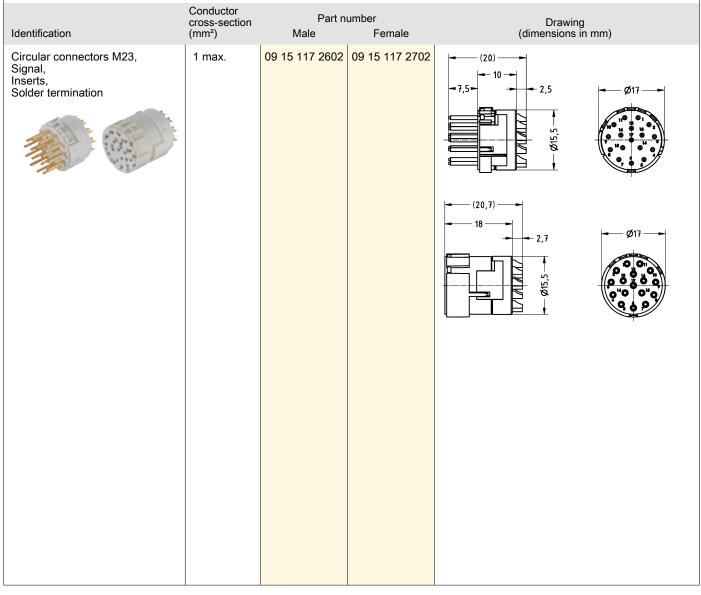


### M23 Signal inserts



Number of contacts

16

+ 3 additional special contacts Crimp termination

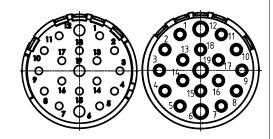

#### Technical characteristics

Number of contacts 16

Additional contacts + 3 additional special contacts

Rated current 8 A
Rated voltage 100 V
Rated impulse voltage 1.5 kV
Pollution degree 3
Rated current (special contact) 10 A
Rated voltage (special contact) 100 V
Rated impulse voltage (special 5 kV contact)

Pollution degree (special

contact)

Insulation resistance  $>10^6 \Omega$ 

#### Technical characteristics

Limiting temperature -40 ... +125 °C

Mating cycles ≥500

Conductor cross-section 0.08 ... 1.5 mm² Material (insert) Polyamide (PA)

Colour (insert) White Material flammability class acc. V-0

to UL 94

RoHS compliant with exemption

### Specifications and approvals

UL 1977 ECBT2.E235076


Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawir (dimensions	ng in mm)
Circular connectors M23, Signal, Inserts, Crimp termination	0.08 1.5	09 15 119 3001	09 15 119 3101	- 11,6 - 5'5'8	Ø17  10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
Please order crimp contacts separately. 16x 1 mm 3x 1.5 mm				19,6	Ø17  Ø17  Ø00000000000000000000000000000
3 3					

M23



Number of contacts

+ 3 additional special contacts Solder termination

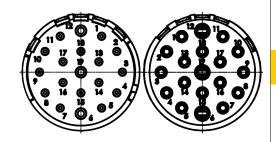

#### Technical characteristics

Number of contacts

+ 3 additional special contacts Additional contacts

Rated current 8 A Rated voltage 100 V Rated impulse voltage 1.5 kV Pollution degree 3 Rated current (special contact) 10 A Rated voltage (special contact) 100 V Rated impulse voltage (special 1.5 kV contact) 3

Pollution degree (special

contact)

Insulation resistance >10<sup>6</sup> Ω Limiting temperature -40 ... +125 °C

#### Technical characteristics


≥500 Mating cycles Conductor cross-section 1 mm² max. Material (insert) Polyamide (PA) Colour (insert) White Material (contacts) Copper alloy Surface (contacts) Gold plated

Material flammability class acc.

to UL 94

RoHS compliant with exemption

### Specifications and approvals

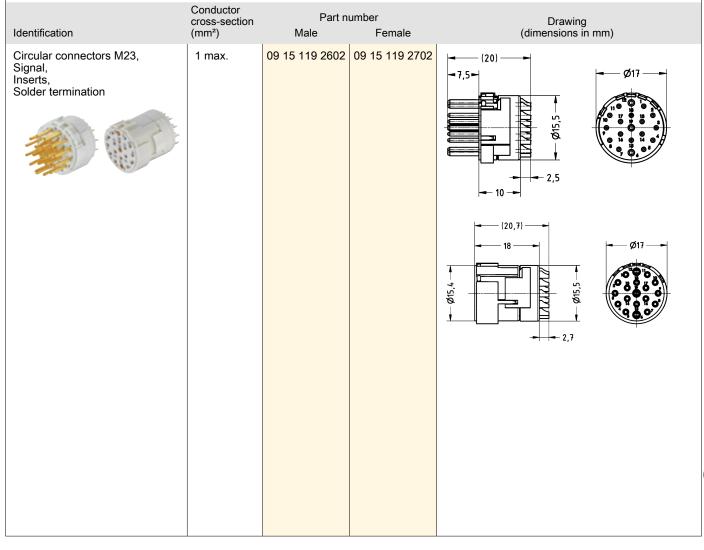

#### **Technical characteristics**

 $\begin{array}{lll} \text{Contact resistance} & \leq 3 \ \text{m}\Omega \\ \text{Conductor cross-section} & 0.08 \dots 0.56 \ \text{mm}^2, \, 0.14 \dots 1 \ \text{mm}^2, \\ 0.75 \dots 1.5 \ \text{mm}^2, \, 0.75 \dots 2.5 \ \text{mm}^2, \\ 0.34 \dots 1 \ \text{mm}^2, \, 0.14 \dots 0.56 \ \text{mm}^2, \\ 0.56 \dots 1 \ \text{mm}^2 \\ \text{Conductor cross-section} & AWG 28 \dots AWG 20, \\ AWG 28 \dots AWG 17, \\ AWG 19 \dots AWG 16, \\ AWG 19 \dots AWG 17, \\ AWG 22 \dots AWG 17, \\ AWG 26 \dots AWG 20, \\ AWG 20 \dots AWG 17 \\ \end{array}$ 


#### Technical characteristics

Material (contacts) Copper alloy Surface (contacts) Gold plated

RoHS compliant with exemption

#### Specifications and approvals

EN 60664-1 IEC 61984

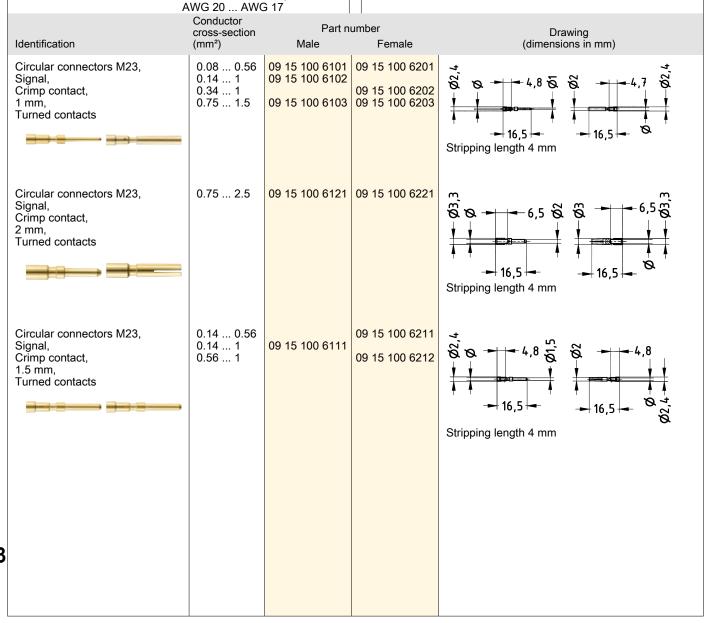

#### **Features**

- · Screw locking
- · ComLock rapid locking
- ComLock-S rapid locking (Compatible to Speedtec from TE)

#### Technical characteristics

Limiting temperature -40 ... +125 °C

Screw locking, ComLock Locking type

rapid locking, ComLock-S rapid

locking


Degree of protection acc. to IEC IP67, in locked position, IP69 / 60529 IPX9K acc. to ISO 20653

Material (hood/housing) Copper-zinc alloy Surface (hood/housing) Nickel plated

Material (seal) Colour (seal) Black

RoHS compliant with exemption

### Specifications and approvals

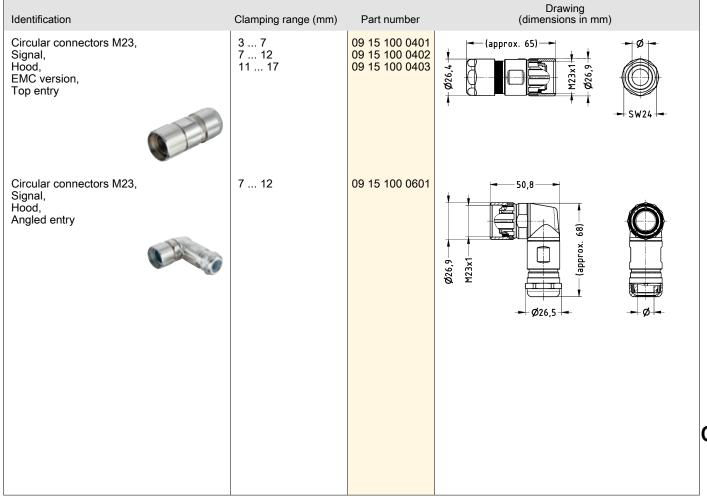

### M23 Signal Hoods/Housings



Drawing (dimensions in mm) Identification Clamping range (mm) Part number Circular connectors M23, 7 ... 12 09 15 100 0602 Signal, Hood, EMC version, Angled entry Ø26,4 👆 09 15 100 0603 Circular connectors M23, 7 ... 12 60 Signal, Hood, EMC version, Rotatable, Angled entry (approx. Ø26 M23x1-🗕 ø26,5 👆 3 ... 7 7 ... 12 Circular connectors M23, 09 15 100 0491 (approx. 68) --Signal, Hood, EMC version, 09 15 100 0492 09 15 100 0493 Top entry, ComLock rapid locking **→** Ø28 • 09 15 100 0481 Circular connectors M23, 3 ... 7 (aprrox. 69) Signal, Hood, 7 ... 12 11 ... 17 09 15 100 0482 09 15 100 0483 EMC version, Top entry, ComLock-S rapid locking SW24+ Compatible to Speedtec (TE) 3 ... 7 7 ... 12 11 ... 17 09 15 100 0701 Circular connectors M23, -(approx. 67)-Signal, 09 15 100 0702 Cable to cable housing, EMC version, 09 15 100 0703 Top entry **C03** 

M23

## M23 Signal Hoods/Housings




Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)	
Circular connectors M23, Signal, Cover, for hoods, With chain (100 mm)		09 15 100 9103	## d26,2	M23
Not compatible to ComLock				
Circular connectors M23, Signal, Cover, for bulkhead mounted housings, for cable to cable housing		09 15 100 9101	12 - XECK - 11 - XECK - 11 - XECK - 11 - XECK - XEC	
Circular connectors M23,		09 15 100 9102	<del> </del> 12 <del>  -</del> -	
Signal, Cover, for bulkhead mounted housings, for cable to cable housing, With chain (70 mm)			Ø26,2 (14,7)	
				C03
				_ 19


### M23 Power inserts



Number of contacts



Crimp termination

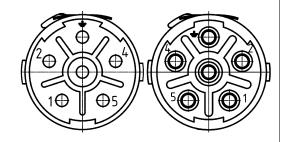

#### Technical characteristics

 Number of contacts
 5

 Rated current
 28 A

 Rated voltage
 600 V

 Rated impulse voltage
 4 kV

 Pollution degree
 3

 Insulation resistance
 >10<sup>13</sup> Ω

 Limiting temperature
 -40 ... +125 °C

 Mating cycles
 ≥500

 Conductor cross-section
 0.14 ... 4 mm²

Conductor cross-section 0.14 ... 4 mm²
Material (insert) Polyamide (PA)

Conductor

### Technical characteristics

Colour (insert) Blue Material flammability class acc. V-0 to UL 94

RoHS compliant

## Specifications and approvals

UL 1977 ECBT2.E235076

Identification		Conductor cross-section (mm²)	Part no Male	umber Female	(dime	Drawing nsions in mm)
Circular conne Power, Inserts, Crimp termina		0.14 4	09 15 606 3001	09 15 606 3101	Ø21	30,2
Please order of separately. 6x 2 mm	crimp contacts				8'619	30,2
3						


**M23** 



Number of contacts

3+ 🖶

+ 4 additional signal contacts Crimp termination

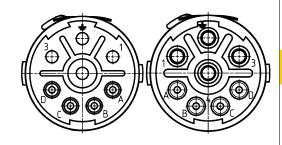

#### Technical characteristics

Number of contacts 3

Additional contacts + 4 additional signal contacts

Rated current 28 A Rated voltage 600 V Rated impulse voltage 4 kV Pollution degree 3 Rated current (signal) 8 A 300 V Rated voltage (signal) Rated impulse voltage (signal) 2.5 kV Pollution degree (signal)  $>10^{13} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C

#### Technical characteristics

Mating cycles ≥500


Conductor cross-section 0.14 ... 4 mm² Material (insert) Polyamide (PA)

Colour (insert) Blue Material flammability class acc. V-0

to UL 94

RoHS compliant

### Specifications and approvals

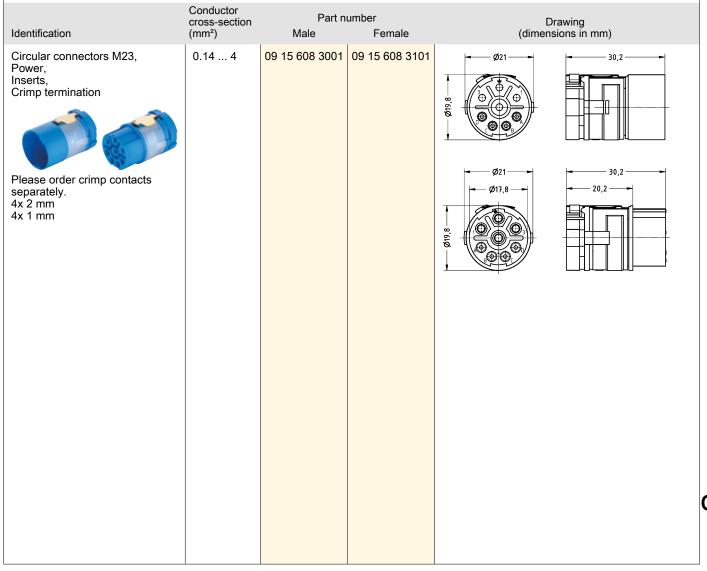

#### M23 Power inserts




Number of contacts

3+



+ 5 additional signal contacts Crimp termination

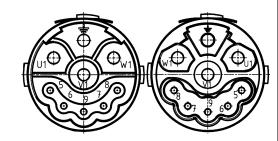

#### Technical characteristics

Number of contacts

Additional contacts + 5 additional signal contacts

Rated current 28 A Rated voltage 630 V Rated impulse voltage 4 kV Pollution degree Rated current (signal) 10 A Rated voltage (signal) 250 V Rated impulse voltage (signal) 2.5 kV Pollution degree (signal)  $>10^{13} \Omega$ Insulation resistance

Insulation resistance  $>10^{13} \Omega$ Limiting temperature  $-40 \dots +125 ^{\circ}$ C

#### Technical characteristics

Mating cycles≥500Conductor cross-section0.14 ... 4 mm²Material (insert)Polyamide (PA)

Colour (insert) Blue Material flammability class acc. V-0 to UL 94

RoHS compliant

### Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M23, Power, Inserts, Mating face (A), Crimp termination  Please order crimp contacts separately. 4x 2 mm 5x 1 mm	0.14 4	09 15 609 3001	09 15 609 3101	32,4 30 32,4 31 32,4 30 32,4 30 30 30 30 30 30 30 30 30 30


**M23** 



Number of contacts

3+ 😩

+ 5 additional signal contacts Crimp termination

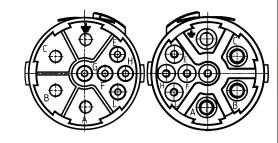

#### Technical characteristics

Number of contacts 3

Additional contacts + 5 additional signal contacts

Rated current 28 A Rated voltage 630 V Rated impulse voltage 4 kV Pollution degree 3 Rated current (signal) 10 A Rated voltage (signal) 250 V Rated impulse voltage (signal) 2.5 kV Pollution degree (signal)  $>10^{13} \Omega$ Insulation resistance Limiting temperature -40 ... +125 °C

#### Technical characteristics

Mating cycles ≥500


Conductor cross-section 0.14 ... 4 mm²
Material (insert) Polyamide (PA)

Colour (insert) Blue Material flammability class acc. V-0


to UL 94

RoHS compliant


### Specifications and approvals

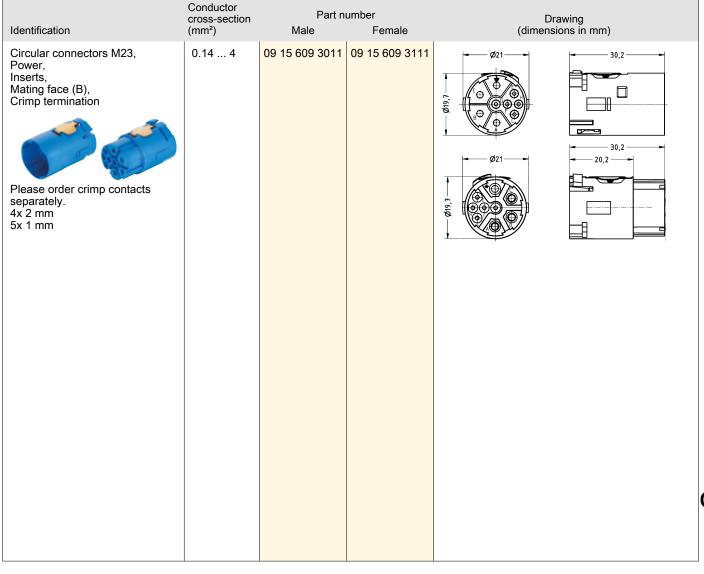

Number of contacts



+ 4 additional signal contacts + 4 Data Crimp termination

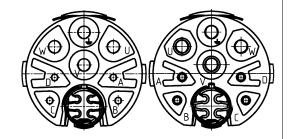

#### Technical characteristics

Number of contacts Additional contacts + 4 additional signal contacts, + 4 Data Rated current 28 A 630 V Rated voltage Rated impulse voltage 4 kV 3 Pollution degree Rated current (signal) 8 A Rated voltage (signal) 300 V 2.5 kV Rated impulse voltage (signal) Pollution degree (signal) 3 Rated current (data) 2 A Rated voltage (data) 60 V Rated impulse voltage (data) 0.5 kV


#### Technical characteristics

Pollution degree (data) Limiting temperature -40 ... +125 °C Mating cycles ≥500 Conductor cross-section 0.08 ... 4 mm<sup>2</sup> Material (insert) Polyamide (PA) Colour (insert) Blue Material flammability class acc. to UL 94

RoHS

compliant

### Specifications and approvals

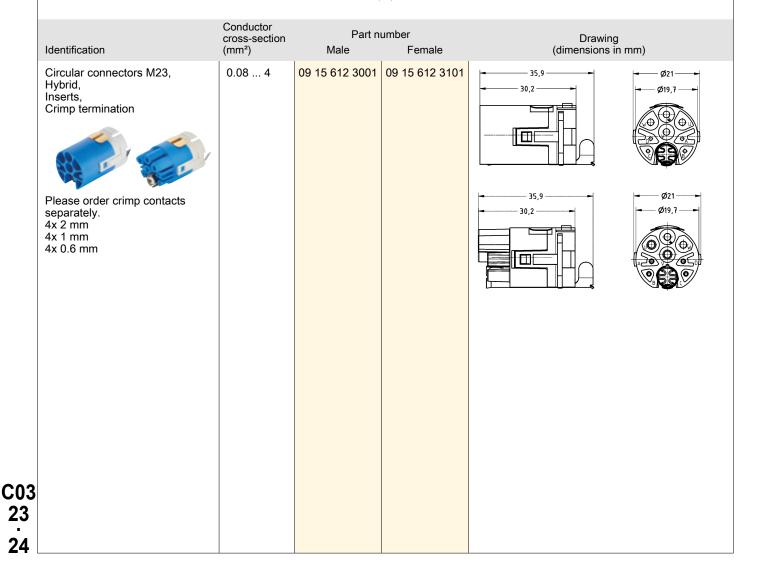



### Technical characteristics

Contact resistance

Conductor cross-section

Material (contacts) Surface (contacts) RoHS

≤3 mΩ

0.08 ... 0.34 mm², 0.14 ... 1 mm², 0.75 ... 2.5 mm², 2.5 ... 4 mm²

Copper alloy

Gold plated compliant, compliant with exemption

## Specifications and approvals

EN 60664-1 IEC 61984

		l	I	
Identification	Conductor cross-section (mm²)	Part n Male	umber Female	Drawing (dimensions in mm)
Circular connectors M23, Power, Crimp contact, 0.6 mm, Turned contacts	0.08 0.34	09 15 600 6191	09 15 600 6291	4,5 % 4,5 % 5 17,9 % Stripping length 4 mm
Circular connectors M23, Power, Crimp contact, 1 mm, Turned contacts	0.14 1	09 15 600 6101	09 15 600 6201	Stripping length 4 mm
Circular connectors M23, Power, Crimp contact, 2 mm, Turned contacts	0.75 2.5 2.5 4	09 15 600 6121 09 15 600 6122	09 15 600 6221 09 15 600 6222	7,8 % 7,8 % % 7,8 % % 7,8 % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % 7,8 % % % % 7,8 % % % 7,8 % % % % 7,8 % % % % 7,8 % % % % 7,8 % % % % 7,8 % % % % 7,8 % % % % 7,8 % % % % % 7,8 % % % % % 7,8 % % % % % 7,8 % % % % % % 7,8 % % % % % % 7,8 % % % % % % % 7,8 % % % % % % % % % % % % % % % % % % %

#### **Features**

- · Screw locking
- · ComLock rapid locking
- ComLock-S rapid locking (Compatible to Speedtec from TE)

#### Technical characteristics

Limiting temperature

Locking type

-40 ... +125 °C

Screw locking, ComLock

rapid locking, ComLock-S rapid IP67 / IP69 / IPX9K acc. to ISO

locking

Degree of protection acc. to IEC

20653, in locked position

Material (hood/housing) Surface (hood/housing)

Copper-zinc alloy Nickel plated

Material (seal) Colour (seal)


**NBR** Black

RoHS

compliant with exemption,

compliant

### Specifications and approvals

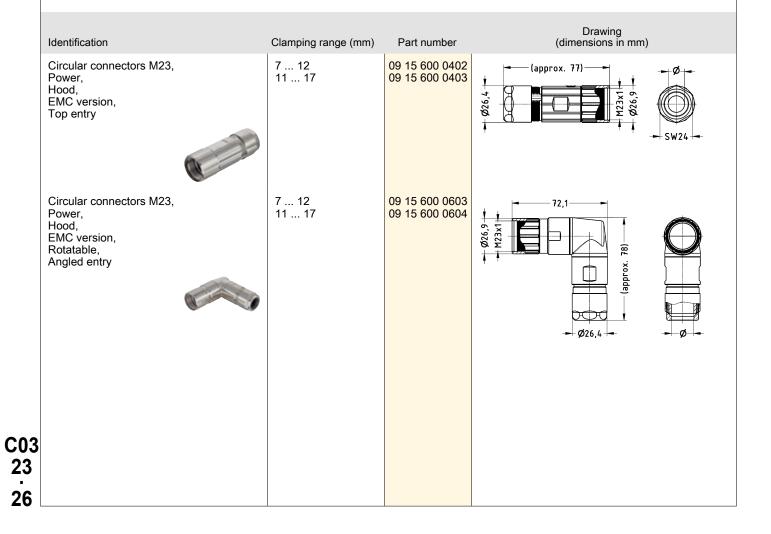

## M23 Power Hoods/Housings




Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)	
Circular connectors M23, Power, Hood, EMC version, Top entry, ComLock rapid locking	7 12 11 17	09 15 600 0492 09 15 600 0493	(approx. 77)	M23
Circular connectors M23, Power, Hood, EMC version, Top entry, ComLock-S rapid locking  Compatible to Speedtec (TE)	7 12 11 17	09 15 600 0482 09 15 600 0483	(approx. 80)  SW24  Ø28	
Circular connectors M23, Power, Cable to cable housing, EMC version, Top entry	7 12 11 17	09 15 600 0702 09 15 600 0703	(approx. 72)	
Circular connectors M23, Power, Cover, for hoods, With chain (100 mm)		09 15 600 9103	926 19,5	
Circular connectors M23, Power, Cover, for bulkhead mounted housings, for cable to cable housing, With chain (70 mm)		09 15 600 9102	Ø26 11 XX CX XX	
				C03 23

7/8" HARAX®	HARTING	
Contents	Page	
Contents 7/8" HARAX®	C03 35.2	7/8
		C03 35 1



Number of contacts

HARAX® connection technology Unshielded

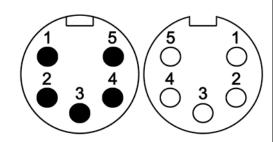

#### Technical characteristics

Number of contacts Rated current 10 A 230 V Rated voltage conductor-earth Rated voltage conductor-con-400 V ductor 4.8 kV Rated impulse voltage Pollution degree 3 Insulation resistance >108 Ω Contact resistance ≤10 mΩ ≥100 Mating cycles Wire outer diameter ≤2.8 mm Locking type Screw locking

#### Technical characteristics

Degree of protection acc. to IEC IP65 / IP67, when mated

0.75 ... 1.5 mm<sup>2</sup> Conductor cross-section Conductor cross-section AWG 18 ... AWG 16 Cable diameter 6.8 ... 12.5 mm Tightening torque 1.5 Nm

Polyamide (PA), Thermoplastic polyurethane (TPU) Material (insert)

Material (hood/housing) Polyamide (PA), Zinc die-cast,

Thermoplastic polyurethane

(TPU)

Copper alloy Material (contacts) Surface (contacts) Gold plated

RoHS compliant with exemption

	Identification	Conductor cross-section (mm²)	Part no Male	umber Female	Drawing (dimensions in mm)
	Circular connectors 7/8", Cable connector, Straight, HARAX® connection technology, Unshielded	0.75 1.5	21 04 116 1505	21 04 116 2505	Gesantlänge im verschraublen Zusland ca, 73mm complete lenght when assembled app. 73mm  W-N327 width across 1/als 22
					Gesont länge im verschraubten Zustand co. 70mm complete length when assembled app. 70mm  Width across 11ots 22
3					

## Cable assemblies



Contents	Page
M8 system cables	CAB 03.02
M8 system cables D-coding	CAB 03.04
M12 system cables A-coding	CAB 03.06
M12 system cables B-coding	CAB 03.12
M12 system cables D-coding	CAB 03.14
M12 system cables X-coding	CAB 03.22
M12 system cables L-coding	CAB 03.30
7/8" system cables	CAB 03.32
M23 system cables, signal	CAB 03.34
M23 system cables, power	CAB 03.36

Cable

## M8 system cables




Cable



#### Technical characteristics

System cables with M8 circular connectors without PE

	3 p	oles	4 p	oles
	PVC	PUR	PVC	PUR
Rated voltage	max. 60 V AC/DC	max. 60 V AC/DC	max. 30 V AC/DC	max. 30 V AC/DC
Rated currrent / contact	max. 3 A @ +40 °C			
Screw locking	M8x1, self securing	M8x1, self securing	M8x1, self securing	M8x1, self securing
Recommended torque	0.4 Nm	0.4 Nm	0.4 Nm	0.4 Nm
Temperature range (working and storage)	-30 °C +80 °C			
Degree of protection	IP67	IP67	IP67	IP67
Number of wires / wire gauge	3 x 0.25 mm <sup>2</sup>			
Conductor insulation	PVC (bn, bu, bk)	PVC (bn, bu, bk)	PVC (bn, wh, bu, bk)	PVC (bn, wh, bu, bk)
Arrangement of insulated strands	32 x Ø 0.1 mm			
Sheath	PVC	PUR (UL, CSA)	PVC	PUR (UL, CSA)
Sheath colour	grey	black	grey	black
Outer diameter	Ø 4.40 ± 0.15 mm	Ø 4.40 ± 0.15 mm	Ø 4.70 ± 0.15 mm	Ø 4.40 ± 0.15 mm
Useable as trailing cable	no	yes	no	yes
Halogen free acc. to	_	DIN VDE 0472 part 815	_	DIN VDE 0472 part 815
Flame retardant acc. to	DIN EN 60 332-2-2	cUL20549	DIN EN 60332-2-2	cUL20549
Oil-resistant	_	DIN EN 60811-2-1	_	_

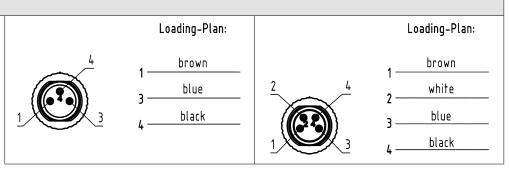

#### M8 system cables Male, 3 poles Male, 4 poles Female, 3 poles Female, 4 poles Part number definition 2 1 3 4 Χ Χ Χ Χ Χ Χ Χ Χ Χ Χ Connector 1 80 Male straight 81 Female straight 82 Male angled 83 Female angled **Connector 2** 00 No connector 80 Male straight 81 Female straight 82 Male angled 83 Female angled **Number of contacts** 3 3 poles 4 4 poles Cable material 80 PVC (3 poles) 81 PVC (4 poles) 88 PUR (3 poles) 89 PUR (4 poles) Preferred length\* 005 0.5 m 1.0 m 010 015 1.5 m

020

050

075

2.0 m


5.0 m

7.5 m 100 10.0 m Cable

<sup>\*</sup> Other cable lengths on request!



Cable






#### Technical characteristics

System cables with M8 circular connectors shielded, D-coding

	4 poles	4 poles
	PVC	PUR
Rated voltage	max. 50 V AC/60 V DC	max. 50 V AC/60 V DC
Rated currrent / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C
Screw locking	M8x1, self securing	M8x1, self securing
Recommended torque	0.4 Nm	0.4 Nm
Temperature range (working and storage)	-30 °C +70 °C	-30 °C +70 °C
Degree of protection	IP67	IP67
Number of wires / wire gauge	4 x AWG22	4 x AWG22
Conductor insulation	PE (wh, ye, bu, or)	PE (wh, ye, bu, or)
Arrangement of insulated strands	7 x Ø 0.25 mm	7 x Ø 0.25 mm
Sheath	PVC	PUR
Sheath colour	green	green
Outer diameter	Ø 6.20 ± 0.20 mm	Ø 6.20 ± 0.20 mm
Useable as trailing cable	no	yes
Halogen free acc. to	-	IEC 60754
Flame retardant acc. to	UL 1685	IEC 60332-1-2 and UL 2556 VW1
Oil-resistant	IEC 60811-2-1	IEC 60 811-2-1 and UL13

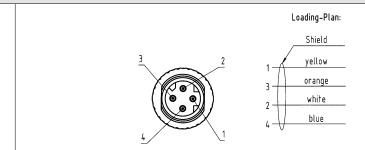

#### M8 system cables D-coding Male, 4 poles Female, 4 poles Part number definition 2 1 3 4 Χ Χ Χ Χ Χ Χ Χ Χ Χ Χ Connector 1 C1 Male straight D1 Female straight Connector 2 00 No connector C7 Male straight D7 Female straight **Number of contacts** 4 4 poles Cable material 05 PVC 77 PUR Preferred length\* 005 0.5 m 010 1.0 m 1.5 m 015 020 2.0 m 050 5.0 m 7.5 m 075 100 10.0 m

Cable

CAB

<sup>\*</sup> Other cable lengths on request!




Cable



#### Technical characteristics

System cables with M12 circular connectors without PE, A-coding


	3 pc	oles	4 poles		
	PVC	PUR	PVC	PUR	
Rated voltage	max. 250 V AC/DC				
Rated currrent / contact	max. 4 A @ +40 °C				
Screw locking	M12x1, self securing	M12x1, self securing	M12x1, self securing	M12x1, self securing	
Recommended torque	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm	
Temperature range (working and storage)	-30 °C +80 °C				
Degree of protection	IP67	IP67	IP67	IP67	
Number of wires / wire gauge	3 x 0.34 mm <sup>2</sup>	3 x 0.34 mm <sup>2</sup>	4 x 0.34 mm <sup>2</sup>	4 x 0.34 mm <sup>2</sup>	
Conductor insulation	PVC (bn, bu, bk)	PP (bn, bu, bk)	PVC (bn, wh, bu, bk)	PP (bn, wh, bu, bk)	
Arrangement of insulated strands	42 x Ø 0.1 mm				
Sheath	PVC	PUR (UL, CSA)	PVC	PUR (UL, CSA)	
Sheath colour	grey	black	grey	black	
Outer diameter	Ø 4.4 ± 0.15 mm	Ø 4.4 ± 0.15 mm	Ø 4.7 ± 0.15 mm	Ø 4.7 ± 0.15 mm	
Useable as trailing cable	no	yes	no	yes	
Halogen free acc. to	-	DIN VDE 0472 part 815	-	DIN VDE 0472 part 815	
Flame retardant acc. to	DIN EN 60332-2-2	cUL20549	DIN EN 60332-2-2	cUL20549	
Oil-resistant	_	_	_	DIN EN 60811-2-1	

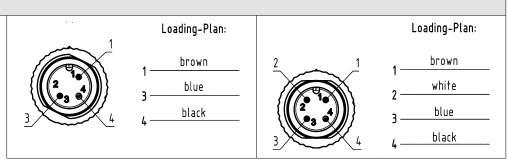





#### Part number definition

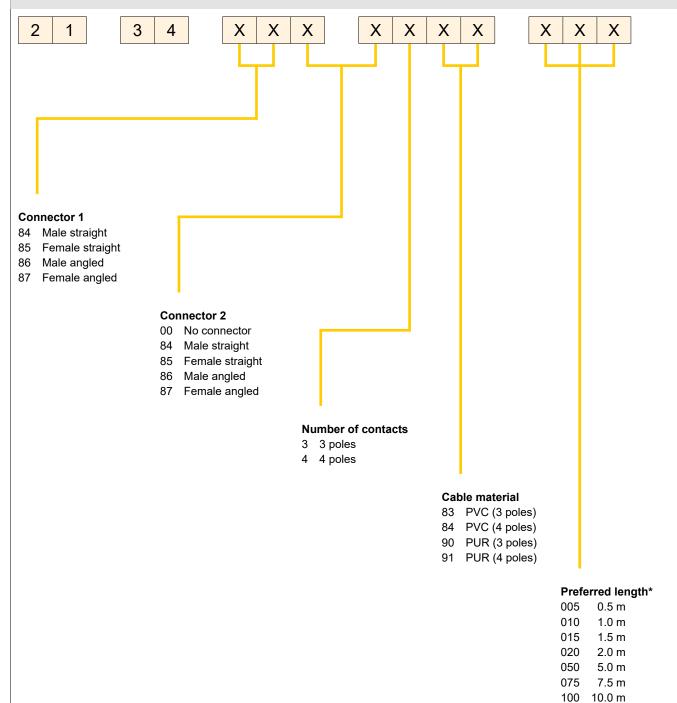

<sup>\*</sup> Other cable lengths on request!

03




Cable



#### Technical characteristics

System cables with M12 circular connectors without PE, A-coding

	5 poles	5 poles	8 poles	8 poles
	PVC	PUR	PVC	PUR
Rated voltage	max. 60 V AC/DC	max. 60 V AC/DC	max. 30 V AC/DC	max. 30 V AC/DC
Rated currrent / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C	max. 2 A @ +40 °C	max. 2 A @ +40 °C
Screw locking	M12x1, self securing	M12x1, self securing	M12x1, self securing	M12x1, self securing
Recommended torque	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm
Temperature range (working and storage)	-30 °C +80 °C	-30 °C +80 °C	-30 °C +80 °C	-30 °C +80 °C
Degree of protection	IP67	IP67	IP67	IP67
Number of wires / wire gauge	5 x 0.34 mm <sup>2</sup>	5 x 0.34 mm <sup>2</sup>	8 x 0.25 mm <sup>2</sup>	8 x 0.25 mm <sup>2</sup>
Conductor insulation	PVC (bn, wh, bu, bk, gn/ye)	PP (bn, wh, bu, bk, gn/ye)	PVC (wh, bn, gn, ye, gy, pk, bu, rd)	PP (wh, bn, gn, ye, gy, pk, bu, rd)
Arrangement of insulated strands	42 x Ø 0.1 mm	42 x Ø 0.1 mm	32 x Ø 0.1 mm	32 x Ø 0.1 mm
Sheath	PVC	PUR	PVC	PUR
Sheath colour	grey	black	grey	black
Outer diameter	Ø 5.2 ± 0.15 mm	Ø 5.1 ± 0.15 mm	Ø 6.2 ± 0.2 mm	Ø 6.0 ± 0.2 mm
Useable as trailing cable	no	yes	no	yes
Halogen free acc. to	_	DIN VDE 0472 part 815	_	DIN VDE 0472 part 815
Flame retardant acc. to	DIN EN 60 332-2-2	cULus 20549	DIN EN 60332-2-2	cULus 20549
Oil-resistant	_	DIN EN 60811-2-1	_	DIN EN 60811-2-1

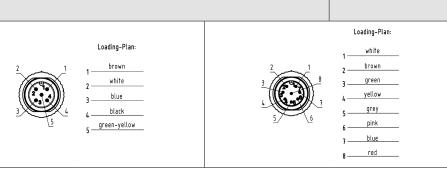








#### Part number definition

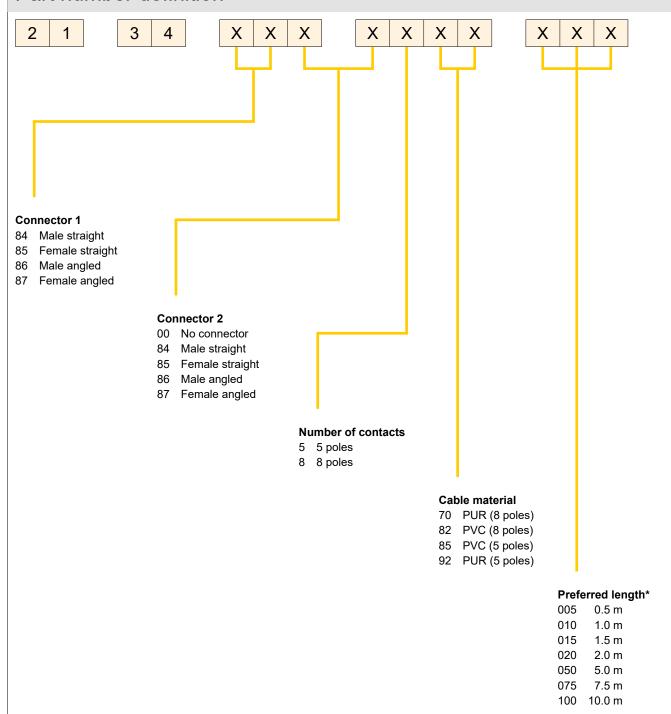


<sup>\*</sup> Other cable lengths on request!

CAB 03



Cable






#### Technical characteristics

System cables with M12 circular connectors without PE, A-coding


	12 p	12 poles		
	PVC	PUR		
Rated voltage	max. 30 V AC/DC	max. 30 V AC/DC		
Rated currrent / contact	max. 1.5 A @ +40 °C	max. 1.5 A @ +40 °C		
Screw locking	M12x1, self securing	M12x1, self securing		
Recommended torque	0.6 Nm	0.6 Nm		
Temperature range (working and storage)	-30 °C +80 °C	-30 °C +80 °C		
Degree of protection	IP67	IP67		
Number of wires / wire gauge	12 x 0.14 mm <sup>2</sup>	12 x 0.14 mm²		
Conductor insulation	PVC (wh, bu, bn, gy, rd, bk, ye, pk, gn, vt, rd/bu, gy/pk)	PP (wh, bu, bn, gy, rd, bk, ye, pk, gn, vt, rd/bu, gy/pk)		
Arrangement of insulated strands	18 x Ø 0.1 mm	18 x Ø 0.1 mm		
Sheath	PVC	PUR (UL, CSA)		
Sheath colour	grey	black		
Outer diameter	Ø 6.2 ± 0.2 mm	Ø 6.1 ± 0.2 mm		
Useable as trailing cable	no	yes		
Halogen free acc. to	-	DIN VDE 0472 part 815		
Flame retardant acc. to	DIN EN 60332-1-2	cUL20549		
Oil-resistant	DIN EN 60811-2-1	_		



03



Cable




Male, 12 poles



Female, 12 poles



#### Part number definition

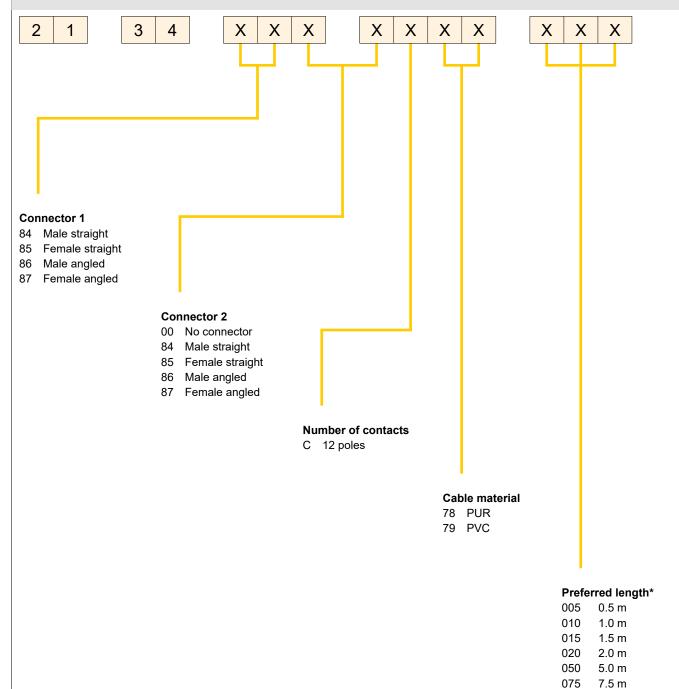

<sup>\*</sup> Other cable lengths on request!

CAB 03

100 10.0 m




Cable



#### Technical characteristics

System cables with M12 circular connectors shielded, B-coding

	4 poles		
	PVC	PUR	
Rated voltage	max. 160 V AC/DC	max. 160 V AC/DC	
Rated currrent / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C	
Screw locking	M12x1, self securing	M12x1, self securing	
Recommended torque	0.6 Nm	0.6 Nm	
Temperature range (working and storage)	-30 °C +80 °C	-30 °C +80 °C	
Degree of protection	IP67	IP67	
Number of wires / wire gauge	2 x AWG 22	2 x AWG 24	
Conductor insulation	PVC (rd, gn)	PE (rd, gn)	
Arrangement of insulated strands	1 x Ø 0.65 mm	19 x Ø 0.14 mm	
Sheath	PVC	PUR (UL, CSA)	
Sheath colour	violet	violet	
Outer diameter	Ø 8.0 ± 0.4 mm	Ø 8.5 ± 0.4 mm	
Useable as trailing cable	no	yes	
Halogen free acc. to	– DIN VDE 0472 par		
Flame retardant acc. to	DIN EN 60 332-1-2	DIN EN 60 332-1-2 DIN EN 60 332-1-2	
Oil-resistant	IEC 80811-2-1 (4h/60°C)	DIN EN 60811-2-1	

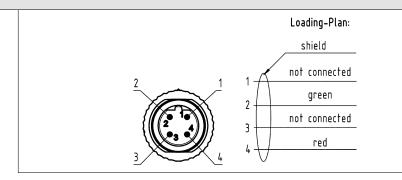

CAB 03 .

#### M12 system cables B-coding Male, 4 poles Female, 4 poles Part number definition 2 1 3 4 Χ Χ Χ Χ Χ Χ Χ Χ Χ Χ Connector 1 88 Male straight 89 Female straight 90 Male angled 91 Female angled **Connector 2** 00 No connector 88 Male straight 89 Female straight 90 Male angled 91 Female angled **Number of contacts** 4 4 poles Cable material 86 PVC 87 PUR Preferred length\* 005 0.5 m 1.0 m 010 015 1.5 m 020 2.0 m CAB 050 5.0 m 075 7.5 m 100 10.0 m

Cable

<sup>\*</sup> Other cable lengths on request!




Cable



#### Technical characteristics

System cables with M12 circular connectors shielded, D-coding

	4 poles		
	PVC	PUR	
Rated voltage	max. 160 V AC/DC	max. 160 V AC/DC	
Rated currrent / contact	max. 4 A @ +40 °C	max. 4 A @ +40 °C	
Screw locking	M12x1, self securing	M12x1, self securing	
Recommended torque	0.6 Nm	0.6 Nm	
Temperature range (working and storage)	-30 °C +80 °C	-30 °C +80 °C	
Degree of protection	IP67	IP67	
Number of wires / wire gauge	4 x AWG 22	4 x AWG 22	
Conductor insulation	PE (ye, wh, og, bu)	PE (ye, wh, og, bu)	
Arrangement of insulated strands	7 x Ø 0.25 mm (AWG 22)	7 x Ø 0.25 mm (AWG 22)	
Sheath	PVC	PUR (UL, CSA)	
Sheath colour	green	green	
Outer diameter	Ø 6.5 ± 0.2 mm	Ø 6.5 ± 0.2 mm	
Useable as trailing cable	no	yes	
Halogen free acc. to	-	IEC 60754	
Flame retardant acc. to	UL 1685 (CSA FT4)	IEC 60332-1-2 und UL 2556 VW1	
Oil-resistant	IEC 80811-2-1 (4h/70°C)	IEC 60811-2-1 und UL13	





#### M12 system cables D-coding Cable Male, 4 poles Female, 4 poles Part number definition 2 1 3 4 Χ Χ Χ Χ Χ Χ Χ Χ Χ Χ Connector 1 92 Male straight 93 Female straight 94 Male angled 95 Female angled **Connector 2** 00 No connector 92 Male straight 93 Female straight 94 Male angled 95 Female angled **Number of contacts** 4 4 poles Cable material 05 PVC 77 PUR Preferred length\* 005 0.5 m 1.0 m 010 015 1.5 m 020 2.0 m CAB 050 5.0 m 075 7.5 m 100 10.0 m

<sup>\*</sup> Other cable lengths on request!



Cable

# HARTING M12 system cable, 4-wire, straight resp. angled

#### **Features**

• Connector types M12 D-coding,

connector straight resp. angled

• Category Cat. 5

Number of wires

• Wiring 1:1

• Sheath material Elastomer,

electron beam cross-linked

#### **Application**

- For harsh industrial environments
- · For installation in railway applications

#### **Benefits**

- · Robust design
- Protection degree IP65/IP67
- Fire protection acc. to EN 45545-1, -2 and -5

#### Technical characteristics

Connector types HARTING M12 D-coding,

overmoulded

Railway cords type 4 x AWG 22/7, stranded

Sheath material Elastomer,

electron beam cross-linked

Wiring 4 pole, 1:1

Transmission performance Class D up to 100 MHz

acc. to ISO/IEC 11801,

EN 50 173-1

Transmission rate 10/100 Mbit/s

Shielding Fully shielded,

360° shielding contact

Operating temperature range

fix operation -40 °C ... +85 °C

Colour Black or blue





Cable

January of the bulk of the bul

HARTING M12 system cable, 4-wire, straight resp. angled


Identification	Part number	Drawing	Dimensions in mm
HARTING M12 system cable, 4-wire, straight one side assembled  Length 0.5 m 1.0 m 2.0 m 2.5 m 5.0 m	Black  09 48 220 0011 005  09 48 220 0011 010  09 48 220 0011 020  09 48 220 0011 025  09 48 220 0011 050	making face acc. IEC 61076-2-101	Ø 6,656)2
7.5 m 10.0 m 15.0 m 20.0 m	09 48 220 0011 075 09 48 220 0011 100 09 48 220 0011 150 09 48 220 0011 200	plastic-ovidth across  X schematic di	flats 13
	Blue	3 - 1	= 3 or/08 = 4 bl/88
Length 0.5 m 1.0 m 2.0 m 2.5 m 5.0 m 7.5 m 10.0 m 15.0 m 20.0 m	21 33 390 0413 005 21 33 390 0413 010 21 33 390 0413 020 21 33 390 0413 025 21 33 390 0413 075 21 33 390 0413 100 21 33 390 0413 100 21 33 390 0413 150 21 33 390 0413 200		
both sides assembled			
Length 0.5 m 1.0 m 2.0 m 2.5 m 5.0 m 7.5 m 10.0 m 15.0 m 20.0 m	Black  09 48 222 2011 005  09 48 222 2011 010  09 48 222 2011 020  09 48 222 2011 050  09 48 222 2011 075  09 48 222 2011 100  09 48 222 2011 150  09 48 222 2011 150  09 48 222 2011 200	width across flats 13  RJI Cable ArAMG 22/7, railway, (Ra-VIS Ether)  scheatic diagram  and railway, (Ra-VIS Ether)  2  3  4  1  2  3  4  1  4  1  1	Plastic-overmoulding  Y  Maring face acc. IEC 61076-2-10  3 - 2  3 - 4

CAE 03



Cable

# HARTING M12 system cable, 4-wire, straight resp. angled

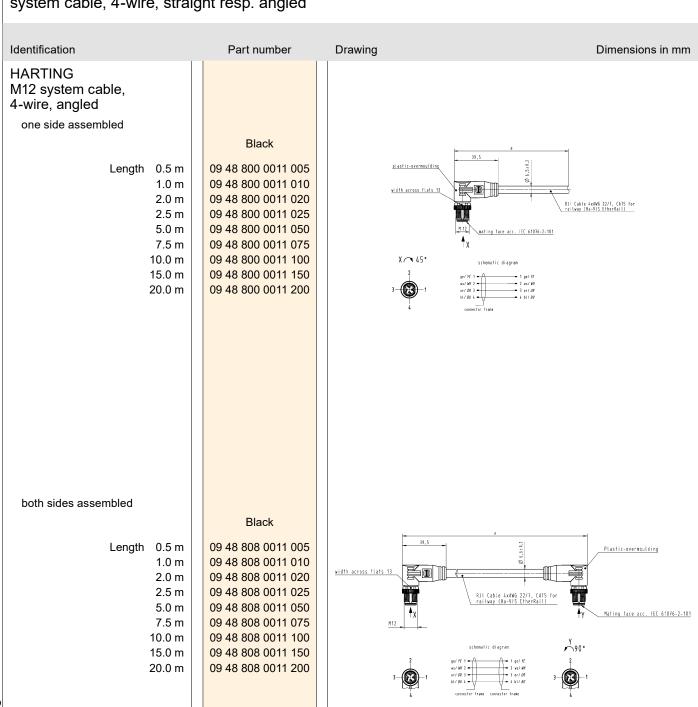

03

Other cable lengths on request!





HARTING M12/RJ45 system cable, 4-wire, straight

Identification Part number Drawing Dimensions in mm **HARTING** M12/RJ45 system cable, 4-wire both sides assembled Black Length 1.0 m 09 48 022 2011 010 1.5 m 09 48 022 2011 015 2.0 m 09 48 022 2011 020 3.0 m 09 48 022 2011 030 Mating face RJ45 acc. to IEC 60603-7 5.0 m 09 48 022 2011 050 7.5 m 09 48 022 2011 075 10.0 m 09 48 022 2011 100 15.0 m 09 48 022 2011 150 20.0 m 09 48 022 2011 200

CAB 03 19



Cable



# HARTING M12 system cable, 4-wire, straight, PushPull Press & Go

# Features Technical characteristics

Connector types M12 D-coding PushPull
 Category Cat. 5

• Number of wires 4

• Wiring 1:1

• Sheath material Elastomer,

electron beam cross-linked

## **Application**

- For harsh industrial environments
- For installation in railway applications

## **Benefits**

- · Robust design
- Protection degree IP65/IP67
- Fire protection acc. to EN 45545-1, -2 and -5
- M12 PushPull for a fast and vibration-free connection

Connector types HARTING M12 D-coding PushPull

Railway cords type 4 x AWG 22/7, stranded

Sheath material Elastomer,

electron beam cross-linked

Wiring 4 pole, 1:1

Transmission performance Class D up to 100 MHz

acc. to ISO/IEC 11801,

EN 50 173-1

Transmission rate 10/100 Mbit/s

Shielding Fully shielded,

360° shielding contact

Operating temperature range

fix operation -40 °C ... +85 °C

Colour Black

Iden	tification	Part number	Drawing	Dimensions in mm
M12	RTING 2 system cable, 4-wire oth sides assembled			
		Black		
	Length 1.0 m 1.5 m 2.0 m 3.0 m 5.0 m	21 33 232 3401 010 21 33 232 3401 015 21 33 232 3401 020 21 33 232 3401 030 21 33 232 3401 050	165 F22 F22 F23 F23 F23 F23 F23 F23 F23 F23	
3	10.0 m	21 33 232 3401 100	Mating face acc. to IEC 61076-2-101	M12 PushPull crimp male 4-pole O-coded/

Notes	HARTING	
		Cab
		CAI
		CAI 03

В

. 21



Cable

Press & Go M12 system cable, 8-wire, Cat. 6<sub>A</sub>

M12 X-coding

Cat. 6<sub>A</sub>

PVC/PUR

1:1

## Technical characteristics

Connector types Press & Go M12 connector

X coding acc. to IEC 61076-2-109

The same

Cable types PVC: 4 x 2 x AWG 26/7, cat. 6<sub>A</sub>,

S/FTP, shielded PUR: 4 x 2 x AWG 26/7, cat. 7,

S/FTP, shielded

Sheath material PVC/PUR

Wiring 8 pole, 1:1

Transmission performance Category 6<sub>A</sub>,

Class E<sub>A</sub> up to 500 MHz acc. to ISO/IEC 11801,

EN 50 173-1

Transmission rate 10/100 Mbit/s

1/ 10 Gbit/s

Shielding Fully shielded,

360° shielding contact

Operating

temperature range -40 °C ... +70 °C

Colour Yellow

## **Application**

**Features** 

Connector types

· Number of wires

· Sheath material

Category

Wiring


- Industrial cabling IP65/IP67
- Transmission up to 10 Gbit/s
- · Camera systems


## **Benefits**

- Very robust metal housing M12 with degree of protection IP65/IP67
- Vibration proof crimp connection
- Maximum data rates through the configuration of the contacts in conformance with Ethernet technology
- Minimal interaction and perfect shielding through paired shielding of the contacts
- Fault proof connection through coding of the connector face. A connection error with other 8 pole M12's is impossible
- PROFINET compliant Type X mating face
- Oil proof acc. to EN 60811-2-1 (PUR)



Cable



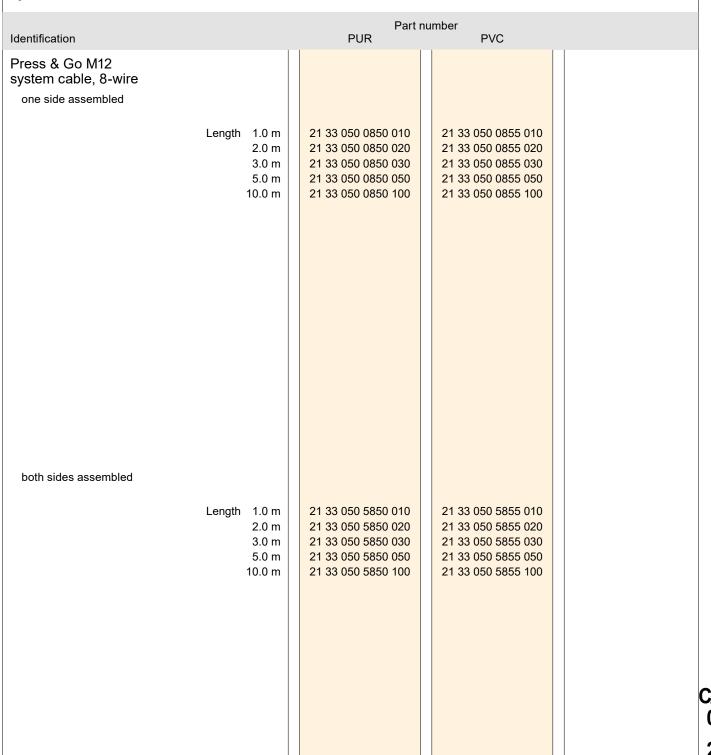



Cable



M12/RJ45 system cable, 8-wire, Cat. 6<sub>A</sub>

## **Features**

Connector types M12 X-coding to RJ45
 Category Cat. 6<sub>A</sub>

Number of wires 8Wiring 1:1

• Sheath material PVC/PUR

## **Application**

- Industrial cabling IP65/IP67
- Transmission up to 10 Gbit/s
- · Camera systems

## **Benefits**

- Very robust metal housing M12 with degree of protection IP65
- · Vibration proof crimp connection
- Maximum data rates through the configuration of the contacts in conformance with Ethernet technology
- Minimal interaction and perfect shielding through paired shielding of the contacts
- Fault proof connection through coding of the connector face.
   A connection error with other 8 pole M12's is impossible
- PROFINET compliant Type X mating face

## Technical characteristics

Connector types har-speed M12 connector

X coding acc. to IEC 61076-2-109

and RJ45 Gigalink

Cable types 4 x 2 x AWG 26/7, cat. 6<sub>A</sub>,

S/FTP, shielded

Sheath material PVC/PUR

Wiring 8 pole, 1:1

Transmission performance Category 6A,

Class  $E_A$  up to 500 MHz acc. to ISO/IEC 11801,

EN 50173-1

Transmission rate 10/100 Mbit/s

1/ 10 Gbit/s

Shielding Fully shielded,

360° shielding contact

Operating

temperature range

-40 °C ... +70 °C

Colour Yellow

Part number Identification PUR PVC									
M12/RJ45 system cable, 8-wire	Yellow	Yellow							
Length 0.5 m	09 48 932 3756 005	09 48 932 3757 005							
1.0 m	09 48 932 3756 010	09 48 932 3757 010							
1.5 m	09 48 932 3756 015	09 48 932 3757 015							
2.0 m	09 48 932 3756 020	09 48 932 3757 020							
2.5 m	09 48 932 3756 025	09 48 932 3757 025							
5.0 m	09 48 932 3756 050	09 48 932 3757 050							
7.5 m	09 48 932 3756 075	09 48 932 3757 075							
10.0 m	09 48 932 3756 100	09 48 932 3757 100							
			I .						

CAB 03 . 24





## har-speed M12 Panel feed-throughs with cable



Identification	Part number	Drawing	Dimensions in mm
nar-speed M12 PFT with cable		width across	viith across flats 19
with 0.3 m cable "Cat. $7_A$ (2 x AWG 27/7) PIMF". Other lengths on request	21 33 080 0850 003		
with 0.3 m cable "HA-VIS EtherRail Cat. 7 4 x (2 x AWG 24/7)". Other lengths on request	21 33 070 0853 003		

Other cable lengths on request!

Cable



Cable



# HARTING M12 system cable, 8-wire, straight

## **Features**

Category 6<sub>A</sub>Number of wires 8

• Wire design AWG 24/7

• Wire diameter  $(8.1 \pm 0.4) \text{ mm}$ 

• Sheath material Elastomer,

electron beam cross-linked

## **Application**

- For harsh industrial environments
- · For installation in railway applications

## **Benefits**

- Transmission of Gigabit and 10 Gigabit Ethernet acc. IEEE 802.3 and multimedia services
- Fire protection acc. EN 45545-1, -2 and -5, flame retardant and heat resistant acc. DIN 5510 (1-4) and EN 50264-1
- UV resistant, RoHS conform, halogen free LSZH

## Technical characteristics

Connector types HARTING M12 X-coding

Cable structure 4 x 2, Twisted Pair, shielded, PIMF

Railway cords type 4 x 2 x AWG 24/7

Category 7, Class F up to 600 MHz acc. to ISO/IEC 11 801 and EN 50 173-1

Sheath material Elastomer, electron beam,

cross-linked

Cable sheath diameter  $(8.1 \pm 0.4)$  mm

Transmission performance Category 6A, Class EA

up to 500 MHz acc. to ISO/IEC 11801 and EN 50173-1

Transmission rate 1/10 Gbit/s

Shielding Paired shielded with additional

cable shield

Operating

temperature range -40 °C ... +80 °C

Colour Black





HARTING M12 system cable, 8-wire, straight

Identification Part number Drawing Dimensions in mm HARTING M12 system cable, 8-wire, Slim Design both sides assembled Black 21 33 010 1853 005 Length 0.5 m 21 33 010 1853 010 1.0 m 2.0 m 21 33 010 1853 020 Mating face acc. to IEC 61076-2-109 21 33 010 1853 025 2.5 m 5.0 m 21 33 010 1853 050 7.5 m 21 33 010 1853 075 Loading-Plan 10.0 m 21 33 010 1853 100 15.0 m 21 33 010 1853 150 20.0 m 21 33 010 1853 200 HARTING M12 system cable, 8-wire, Press & Go one side assembled Black Length 0.5 m 21 33 050 0853 005 1.0 m 21 33 050 0853 010 2.0 m 21 33 050 0853 020 2.5 m 21 33 050 0853 025 5.0 m 21 33 050 0853 050 7.5 m 21 33 050 0853 075 10.0 m 21 33 050 0853 100 21 33 050 0853 150 15.0 m 20.0 m 21 33 050 0853 200 both sides assembled Black Length 0.5 m 21 33 050 5853 005 1.0 m 21 33 050 5853 010 2.0 m 21 33 050 5853 020 2.5 m 21 33 050 5853 025 5.0 m 21 33 050 5853 050 7.5 m 21 33 050 5853 075 10.0 m 21 33 050 5853 100 15.0 m 21 33 050 5853 150 21 33 050 5853 200 20.0 m



Cable

# HARTING M12 system cable, 8-wire, straight, PushPull Press & Go

## **Features**

Category 6<sub>A</sub>Number of wires 8

• Wire design AWG 24/7

• Wire diameter  $(8.1 \pm 0.4) \text{ mm}$ 

• Sheath material Elastomer,

electron beam cross-linked

## **Application**

- For harsh industrial environments
- · For installation in railway applications

## **Benefits**

- Transmission of Gigabit and 10 Gigabit Ethernet acc. IEEE 802.3 and multimedia services
- Fire protection acc. EN 45545-1, -2 and -5, flame retardant and heat resistant acc. DIN 5510 (1-4) and EN 50264-1
- UV resistant, RoHS conform, halogen free LSZH
- M12 PushPull for a fast and vibration-free connection

## Technical characteristics

Connector types HARTING M12 X-coding PushPull

Cable structure 4 x 2, Twisted Pair, shielded, PIMF

Railway cords type 4 x 2 x AWG 24/7

Category 7, Class F up to 600 MHz acc. to ISO/IEC 11801 and EN 50173-1

Sheath material Elastomer, electron beam,

cross-linked

Cable sheath diameter  $(8.1 \pm 0.4)$  mm

Transmission performance Category 6<sub>A</sub>, Class E<sub>A</sub>

up to 500 MHz acc. to ISO/IEC 11801 and EN 50173-1

Transmission rate 1/10 Gbit/s

Shielding Paired shielded with additional

cable shield

Operating


temperature range -40 °C ... +80 °C

Colour Black




Cable



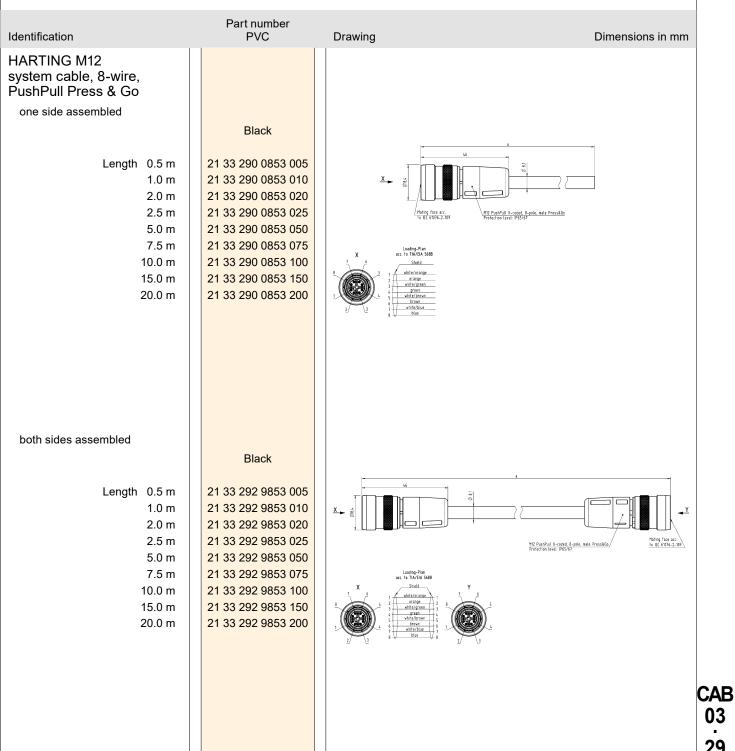



Cable








## Technical characteristics


System cables with M12 circular connectors with FE, L-coding

	5 poles	5 poles	5 poles	5 poles
	PVC	PVC	PVC shielded	PVC shielded
Rated voltage	max. 63 V AC/DC			
Rated currrent / contact	max. 16 A	max. 16 A	max. 16 A	max. 16 A
Screw locking	M12x1, self securing	M12x1, self securing	M12x1, self securing	M12x1, self securing
Recommended torque	0.6 Nm	0.6 Nm	0.6 Nm	0.6 Nm
Temperature range connector (working and storage)	-5 °C +50 °C			
Degree of protection	IP67	IP67	IP67	IP67
Number of wires / wire gauge	5 x 1.5 mm <sup>2</sup>	5 x 2.5 mm <sup>2</sup>	5 x 1.5 mm <sup>2</sup>	5 x 2.5 mm <sup>2</sup>
Conductor insulation	PVC	PVC	PVC	PVC
Sheath	PVC	PVC	PVC	PVC
Sheath colour	grey	grey	grey	grey
Outer diameter	Ø 8.3 mm	Ø 10.1 mm	Ø 9.2 mm	Ø 11.0 mm
Temperature range cable (flexible / fixed)	-15 °C +80 °C -40 °C +80 °C	-15 °C +80 °C -40 °C +80 °C	-10 °C +80 °C -40 °C +80 °C	-10 °C +80 °C -40 °C +80 °C
Useable as trailing cable	no	no	no	no
Halogen free acc. to	no	no	no	no
Flame retardant acc. to	IEC 60332-1-2	IEC 60332-1-2	IEC 60332-1-2	IEC 60 332-1-2
Oil-resistant	yes	yes	yes	yes









03






Male, 4 + FE



Female, 4 + FE



## Part number definition

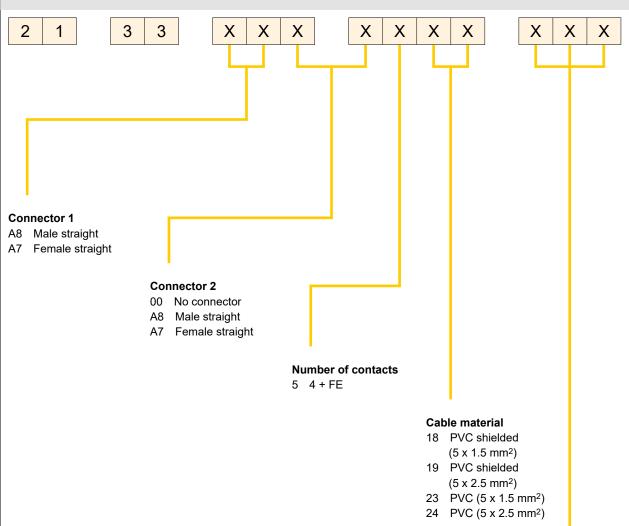

## Preferred length\*

005 0.5 m 010 1.0 m 015 1.5 m 020 2.0 m 050 5.0 m 075 7.5 m 100 10.0 m

<sup>\*</sup> Other cable lengths on request!

# 7/8" system cables



Cable



Male, 2 + PE



Female, 2 + PE





Female, 4 poles





Female, 4 + PE



## Technical characteristics

## 7/8" system cables

	3 poles	(2+PE)	4 p	oles	5 poles (4+PE)		
	PVC PUR		PVC	PUR	PVC	PUR	
Rated voltage	max. 300 V AC/DC	max. 300 V AC/DC	max. 300 V AC/DC	max. 300 V AC/DC	max. 300 V AC/DC	max. 300 V AC/DC	
Rated currrent / contact	max. 10 A @ +40 °C	max. 10 A @ +40 °C	max. 10 A @ +40 °C	max. 10 A @ +40 °C	max. 10 A @ +40 °C	max. 10 A @ +40 °C	
Screw locking	7/8", self securing	7/8", self securing	7/8", self securing	7/8", self securing	7/8", self securing	7/8", self securing	
Temperature range (working and storage)	-30 °C +80 °C	-30 °C +80 °C	-30 °C +80 °C	-30 °C +80 °C	-30 °C +80 °C	-30 °C +80 °C	
Degree of protection	IP67	IP67	IP67	IP67	IP67	IP67	
Number of wires / wire gauge	3 x 1.5 mm <sup>2</sup>	3 x 1.5 mm <sup>2</sup>	4 x 1.5 mm <sup>2</sup>	4 x 1.5 mm <sup>2</sup>	5 x 1.5 mm <sup>2</sup>	5 x 1.5 mm <sup>2</sup>	
Conductor insulation	PVC (bn, bu, gn/ye)	PP (bn, bu, gn/ye)	PVC (bn, wh, bu, bk)	PP (bn, wh, bu, bk)	PVC (bu, bk, wh, bn, gn/ye)	PP (bu, bk, wh, bn, gn/ye)	
Arrangement of insulated strands	84 x Ø 0.15 mm	84 x Ø 0.15 mm	84 x Ø 0.15 mm	84 x Ø 0.15 mm	84 x Ø 0.15 mm	84 x Ø 0.15 mm	
Sheath	PVC	PUR (UL, CSA)	PVC	PUR (UL, CSA)	PVC	PUR (UL, CSA)	
Sheath colour	grey	black	grey	black	grey	black	
Outer diameter	Ø 7.0 ± 0.2 mm	Ø 7.0 ± 0.2 mm	Ø 7.8 ± 0.2 mm	Ø 7.1 ± 0.2 mm	Ø 8.5 ± 0.2 mm	Ø 7.8 ± 0.2 mm	
Useable as trailing cable	no	yes	no	yes	no	yes	
Halogen free acc. to	-	DIN VDE 0472 part 815	_	DIN VDE 0472 part 815	-	DIN VDE 0472 part 815	
Flame retardant acc. to	DIN EN 60332-1-2	DIN EN 60332-1-2	DIN EN 60332-1-2	cUL20549	DIN EN 60332-1-2	cUL20549	
Oil-resistant	IEC 60811-2-1	DIN EN 60811-2-1	_	-	-	_	
	3 PE	Loading-Plan: PE——green-yellow—— 2 ——brown——— 3 ——blue	2 4	Loading-Plan:  1	5 1 1 1 PE	Loading-Plan:  1	

## 7/8" system cables





Male, 2 + PE



Female, 2 + PE



Male, 4 poles



Female, 4 poles




Male, 4 + PE



Female, 4 + PE



## Part number definition

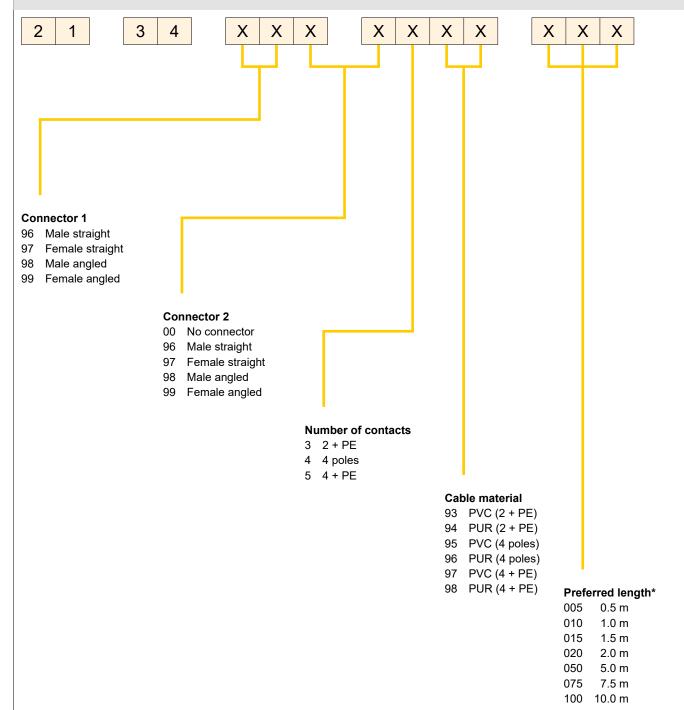

<sup>\*</sup> Other cable lengths on request!

## M23 system cables, signal



Cable

## M23 signal encoder cable, straight, screw, ComLock, ComLock-S

#### Technical characteristics **Features**

 Connector type M23 signal D-Sub male, angled Screw Locking type ComLock ComLock-S

• Number of contacts M23: 12 D-Sub: 9

• Degree of protection IP65 / IP67 when mated

## **Application**

- For harsh industrial environments
- For servo drives
- Standard in acc. to Lenze

## **Benefits**

- 360° shielding
- · Cables suitable for industry
- Drag chain compatible
- Fast lock technology ComLock-S compatible with Speedtec locking
- EMC conform

Cable structure	Copper conductor in acc. to DIN
	VDE 0205 d. 6

Fine wire BS 6360 cl. 6 IEC 60 228 cl. 6

Core structure 3 x (2 x 0.14) mm<sup>2</sup> + (2 x 0.5) mm<sup>2</sup>

Sheath material **PUR** 

Cable sheath diameter 9.8 mm

4 shielded pairs Shielding

Temperature range

-30 °C ... +80 °C moved fixed -40 °C ... +80 °C

Bending radius


10 x cable diameter moved fixed 6 x cable diameter


Colour Black

Lenze System



Cable



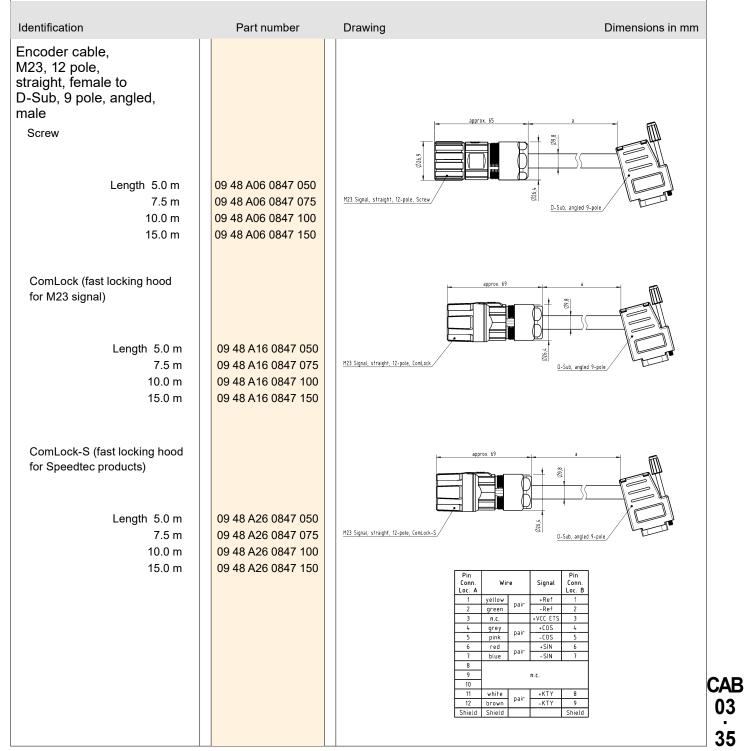

## M23 system cables, power



Cable



## M23 power motor cable, straight, screw, ComLock, ComLock-S

ComLock-S

**Application** 

For servo drives

• Standard in acc. to Lenze

• Drag chain compatible

locking

#### Technical characteristics **Features**

Connector type	M23 power	Cable structure	Copper conductor in acc. to DIN VDE 0295 cl. 6
Locking type	Screw Coml ock		Fine wire IEC 60228 cl. 6

			Core structure	(4 x 1.5 + (2 x 0.5)) mm <sup>2</sup>
Number of contacts	5 + PE			

**PUR** Sheath material • Degree of protection IP65 / IP67 when mated

Cable sheath diameter 11.5 mm

Shielding Shielded pair for the control • For harsh industrial environments

unit and additional overall cable

shielding

Temperature range

moved **Benefits** fixed

-30 °C ... +80 °C -40 °C ... +90 °C • 360° shielding

7.5 x cable diameter moved · Cables suitable for industry fixed 6 x cable diameter

Bending radius

Colour • Fast lock technology ComLock-S compatible with Speedtec Orange

• EMC conform System Lenze



Cable



M23 power motor cable, straight, screw, ComLock, ComLock-S

Identification	Part number	Drawing	Dimensions in mm
Motor cable, M23, 5 + PE, straight, female		approx. 77 -   - a	
Length 5.0 m 7.5 m 10.0 m 15.0 m	21 37 010 0637 050 21 37 010 0637 075 21 37 010 0637 100 21 37 010 0637 150	M23 Power straight, 6-pole, Screw	Copper foil
ComLock (fast locking hood for M23 signal)  Length 5.0 m 7.5 m 10.0 m 15.0 m	21 37 020 0637 050 21 37 020 0637 075 21 37 020 0637 100 21 37 020 0637 150	approx. 77  a  M23 Power straight, 6-pole, ComLock	30 Copper foil
ComLock-S (fast locking hood for Speedtec products)  Length 5.0 m 7.5 m 10.0 m 15.0 m	21 37 030 0637 050 21 37 030 0637 075 21 37 030 0637 100 21 37 030 0637 150	1 white BD1+ 0.2 L622 2 brown BD- 0.2 L622 4622	Copper foil  Pin Conn. Loc. B minal DIN 8-4 0.5 m/r minal DIN 8-4 0.5 m/r Pinal DIN 8-5
		5 2 V 0.2 4622 6 3 W 0.2 1et 0.5 3) consequence BE 0.22 Tet	minal DIN Pase 4. 15mm² rminal DIN Pase 4. 15mm² rminal DIN Pase 4. 15mm² rminal DIN Pase 4. 15mm² Pase 4. 15mm²



# Tools



Page
TOO 03.2
TOO 03.6
TOO 03.7
Т

00

ງວ 1



Tools

## Technical characteristics

RoHS

compliant

Identification	Conductor cross-section (mm²)	Part number	
Crimping tool, for turned male and female contact, 4 indent crimp in acc. to MIL 22 520/2-0	0.09 0.82	09 99 000 0501	
Locator, for single D-Sub standard contacts		09 99 000 0531	
Locator, for part number 09 99 000 0501 and Data- und Power contacts Y-coding		09 99 000 0618	
Locator, for <i>har</i> -speed M12 male contacts		09 99 000 0525	
Locator, for <i>har</i> -speed M12 female contacts		09 99 000 0635	
Locator, for M12 male contacts, 21 01 100 9020		61 03 600 0023	
Locator, for M12 female contacts, 21 01 100 9025		09 99 000 0637	

# Crimping tool



Identification	Conductor cross-section (mm²)	Part number	
Crimping tool, for power contacts	0.5 2.5	09 99 000 0509	
Locator, for part number 09 99 000 0509		09 99 000 0638	

# Crimping tool



Identification	Wrench size	Part number	
Crimping tool, for flange Head openable		09 99 000 0647	
Crimping insert, for part number 09 99 000 0647	6.5 7 7.5 8 8.5 9 9.5 10	09 99 000 0652 09 99 000 0648 09 99 000 0650 09 99 000 0653 09 99 000 0654 09 99 000 0655	



Identification	Conductor cross-section (mm²)	Part number	
Circular connectors M23, Crimping tool, for M23 signal contacts, Pack contents: incl. locator, Handling instruction	0.08 2.5	09 99 000 0890	
Circular connectors M23, Crimping tool, for M23 power contacts, for M23 signal contacts, Pack contents: incl. locator, Handling instruction Not to be used for 0.6 mm contacts.	0.14 4	09 99 000 0896	
Circular connectors M23, Crimping tool, for shielded bushing		09 99 000 0898	
Circular connectors M23, Locator, for 0.6 mm data contacts, for crimping tool 09 99 000 0890		09 99 000 0961	18 B 2 B 3 B 3 B 3 B 3 B 3 B 3 B 3 B 3 B 3

# Assembly tool



Identification	Wrench size	Part number	Drawing (dimensions in mm)
Assembly tool, for flange		09 99 000 0639	9=
Dynamometric screwdriver, for M12 Power	18	09 99 000 0659	29
Dynamometric screwdriver, for M8	9 13	09 99 000 0380 09 99 000 0660	28
Dynamometric screwdriver, for M12-S	13	09 99 000 0382	
Dynamometric screwdriver, for M12-L	17	09 99 000 0384	
Dynamometric screwdriver, for M12 Slim Design	15	09 99 000 0646	
Dynamometric screwdriver, for 7/8"	22	09 99 000 0395	
Assembly tool, for preLink® terminal module		20 82 000 9901	

Identification	Conductor cross-se tion (mm²)	Part number	
Stripping tool	0.08 10	09 99 000 0159	
Stripping tool, Pack contents: Stripping blade set, Straight	0.03 16	09 99 000 0980	
Stripping blade set, Straight		09 99 000 0981	10
Stripping blade set, Oval	10 16	09 99 000 0982	
Stripping blade set, V-shape		09 99 000 0983	70

## Sales Network - worldwide



#### Armenia:

refer to Russia

#### **Australia**

HARTING Pty. Ltd.
Suite 11 / 2 Enterprise Drive Bundoora
3083, University Hill Melbourne, Victoria
Phone 1800 201 081 (toll free calling
within AUS)
+61 3 9466 7088
au@HARTING.com

### Australia and Oceania:

refer to Australia

#### **Austria**

HARTING Ges.m.b.H. Deutschstraße 19 1230 Wien Phone +43 161 621 21 at@HARTING.com

### Azerbaijan:

refer to Turkey

## **Baltic States:**

refer to Finland

## Belarus:

refer to Russia

## **Belgium**

HARTING N.V. Z.3 Doornveld 23 1731 Zellik Phone +32 2 466 0190 be@HARTING.com

## Bosnia Herzegovina:

refer to Austria

### **Brazil**

HARTING Ltda. Alameda Caiapós, 643 06460-110- Barueri - São Paulo Phone +55 11 5035 0073 br@HARTING.com

## Canada

HARTING Canada Inc. 475 Dumont Avenue Suite 300 Dorval, Quebec, H9S 5W2 Phone +1 855 659-6653 info.ca@HARTING.com

## **Central America and the Caribbean:**

refer to USA

### **Central Asia:**

refer to Russia

#### China

HARTING (Zhuhai) Sales Ltd. Room 3501, Grand Gateway I No. 1 Hong Qiao Road Xu Hui District Shanghai 200030 Phone +86 21 3418 9758 cn@HARTING.com

#### Croatia:

refer to Austria

#### **Czech Republic**

HARTING s.r.o. Mlýnská 2 160 00 Praha 6 Phone +420 220 380 495 cz@HARTING.com

## Denmark

HARTING ApS Resilience House Lysholt Allé 8 7100 Vejle Phone +45 70 25 00 32 dk@HARTING.com

## **Finland**

HARTING Oy Teknobulevardi 3-5 01530 Vantaa Phone +358 207 291 510 fi@HARTING.com

## France

HARTING France ZAC Paris Nord 2 181 avenue des Nations 95934 ROISSY CDG Phone +33 1 4938 3400 fr@HARTING.com

#### Germany

HARTING Deutschland GmbH & Co. KG Simeonscarré 1, D-32427 Minden Phone +49 571 8896 0 de@HARTING.com

### Georgia:

refer to Russia

### **Great Britain**

HARTING Limited Caswell Road Brackmills Industrial Estate NN4 7PW GB – Northampton Phone +44 1604 82 75 00 salesuk@HARTING.com

#### Greece:

refer to Italy

## **Hong Kong**

HARTING (HK) Limited Regional Office Asia Pacific 3512, Metroplaza Tower 1 223 Hing Fong Road Kwai Fong, N. T. Phone +852 2423 7338 ap@HARTING.com

#### Hungary

HARTING Magyarország Kft. Fehérvári út 89-95 1119 Budapest Phone +36 1 205 34 64 hu@HARTING.com

#### India

HARTING (India) Private Limited 7th Floor (West Wing) Central Square II Unit No.B 19 part, B 20 & 21 TVK Industrial Estate Guindy, Chennai 600032 Phone +91-44-43560415 in@HARTING.com

### Ireland:

refer to Great Britian

## Israel:

refer to Turkey

### Italy

HARTING S.R.L. Via dell' Industria 7 20090 Vimodrone (MI) Phone +39 02 250801 it@HARTING.com

### Japan

HARTING K.-K. Yusen Shin-Yokohama 1 Chome Bldg., 2F 1-7-9, Shin-Yokohama, Kohoku-ku Yokohama 222-0033 Phone +81 45 476 3456 jp@HARTING.com

## Sales Network - worldwide



Korean Republic

HARTING Korea Co. Ltd. B-B108, Woolim Lions Valley 5th 302 Galmachi-ro, Jungwon-gu Seongnam-si, Gyeonggi-do 13201 Phone +82 31 750 0380 kr@HARTING.com

#### Kosovo:

refer to Austria

### Macedonia:

refer to Austria

#### Malta:

refer to Italy

#### Mexico

HARTING Mexico S.A. de C.V. IOS Torre Virreyes
Pedregal No. 24, Co. Molino Del Rey Suites 357 A, B, C
Del Miguel Hidalgo, Mexico D.F. 11600
Phone +1 800 123 0415
HARTING.mexico@HARTING.com

### Middle East:

refer to United Arab Emirates

## Montenegro:

refer to Austria

#### **Netherlands**

HARTING B.V. Larenweg 44 5234 's-Hertogenbosch Phone +31 736 410 404 nl@HARTING.com

#### **Norway**

HARTING A/S Østensjøveien 36 0667 Oslo Phone +47 22 700 555 no@HARTING.com

### Pakistan:

refer to United Arab Emirates

## **Poland**

HARTING Polska Sp. z o.o. ul. Duńska 11 54-427 Wrocław Phone +48 71 352 81 71 pl@HARTING.com

#### Romania

HARTING Romania SCS Str. Europa Unita nr 21 550018 Sibiu Phone +40 369 102 610 ro@HARTING.com

#### Russia

LLC HARTING Sverdlovskaya nab., 44, lit. Yu, office 612 195027, St. Petersburg Phone +7 812 327 6477 ru@HARTING.com

#### Serbia:

refer to Austria

## **Singapore**

HARTING Singapore Pte. Ltd. 25 International Business Park #04-108 German Centre SGP-Singapore 609916 Phone +65 6225 5285 sg@HARTING.com

## Slovakia

HARTING s.r.o. Slovakia branch Štefániková Trieda 71, (areál pivovaru) 949 01 Nitra Phone +421 37 655 9089 sk@HARTING.com

#### Slowenia:

refer to Austria

## **South Africa**

HARTING South Africa Proprietary Limited Ground Floor, Twickenham Building The Campus, Cnr Main & Sloane Street Bryanston Johannesburg (Bryanston) 2021 Phone +27 (0) 11 575 0017 za@HARTING.com

## **South America:**

refer to Brazil

## South Asia:

refer to Singapore

## **South Pacific:**

refer to Australia

#### **Spain**

HARTING Iberia S.A.U. C/Viriato, 47 8° Planta Edificio Numancia, 1 08014 Barcelona Phone +34 933 638 484 es@HARTING.com

## Sub-Sahara countries:

refer to South Africa

### Sweden

HARTING AB Gustavslundsvägen 141B 167 51 Bromma Phone +46 8 445 7171 se@HARTING.com

#### **Switzerland**

HARTING AG Volketswil branch Hofwiesenstrasse 4 A 8604 Volketswil Phone +41 44 908 20 60 ch@HARTING.com

#### **Taiwan**

HARTING Taiwan Ltd.
Room 1, 5/F, 495 GuangFu South Road
RC-110 Taipei
Phone +886 227 586 177
tw@HARTING.com

## Turkey

HARTING Türkei Elektronik Ticaret Limited Sirketi Bayar Cad. Şehit İlknur Keleş Sok. Dural Plaza No:3 K.11 34742 Kozyatagı – Istanbul Phone +90 216 688 81 00 tr@HARTING.com

#### Ukraine:

refer to Poland

## **United Arab Emirates**

HARTING Middle East FZ-LLC Knowledge Village Block 2A - Office F72 P.O. Box: 454372 Dubai Phone +971 4 453 9737 uae@HARTING.com

#### **HARTING Inc. of North America**

1370 Bowes Road USA-Elgin, Illinois 60123 Phone +1 847 741 1500 us@HARTING.com



HARTING.com – the gateway to your country website.