


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PROD	LOC	DIST	P	F	REVISIONS				
3349	DF	X0			ZONE	LTR	DESCRIPTION	DATE	APPD
CODE						E	REV & REDRAWN; 0600-5735-96 CT	3-97	JW

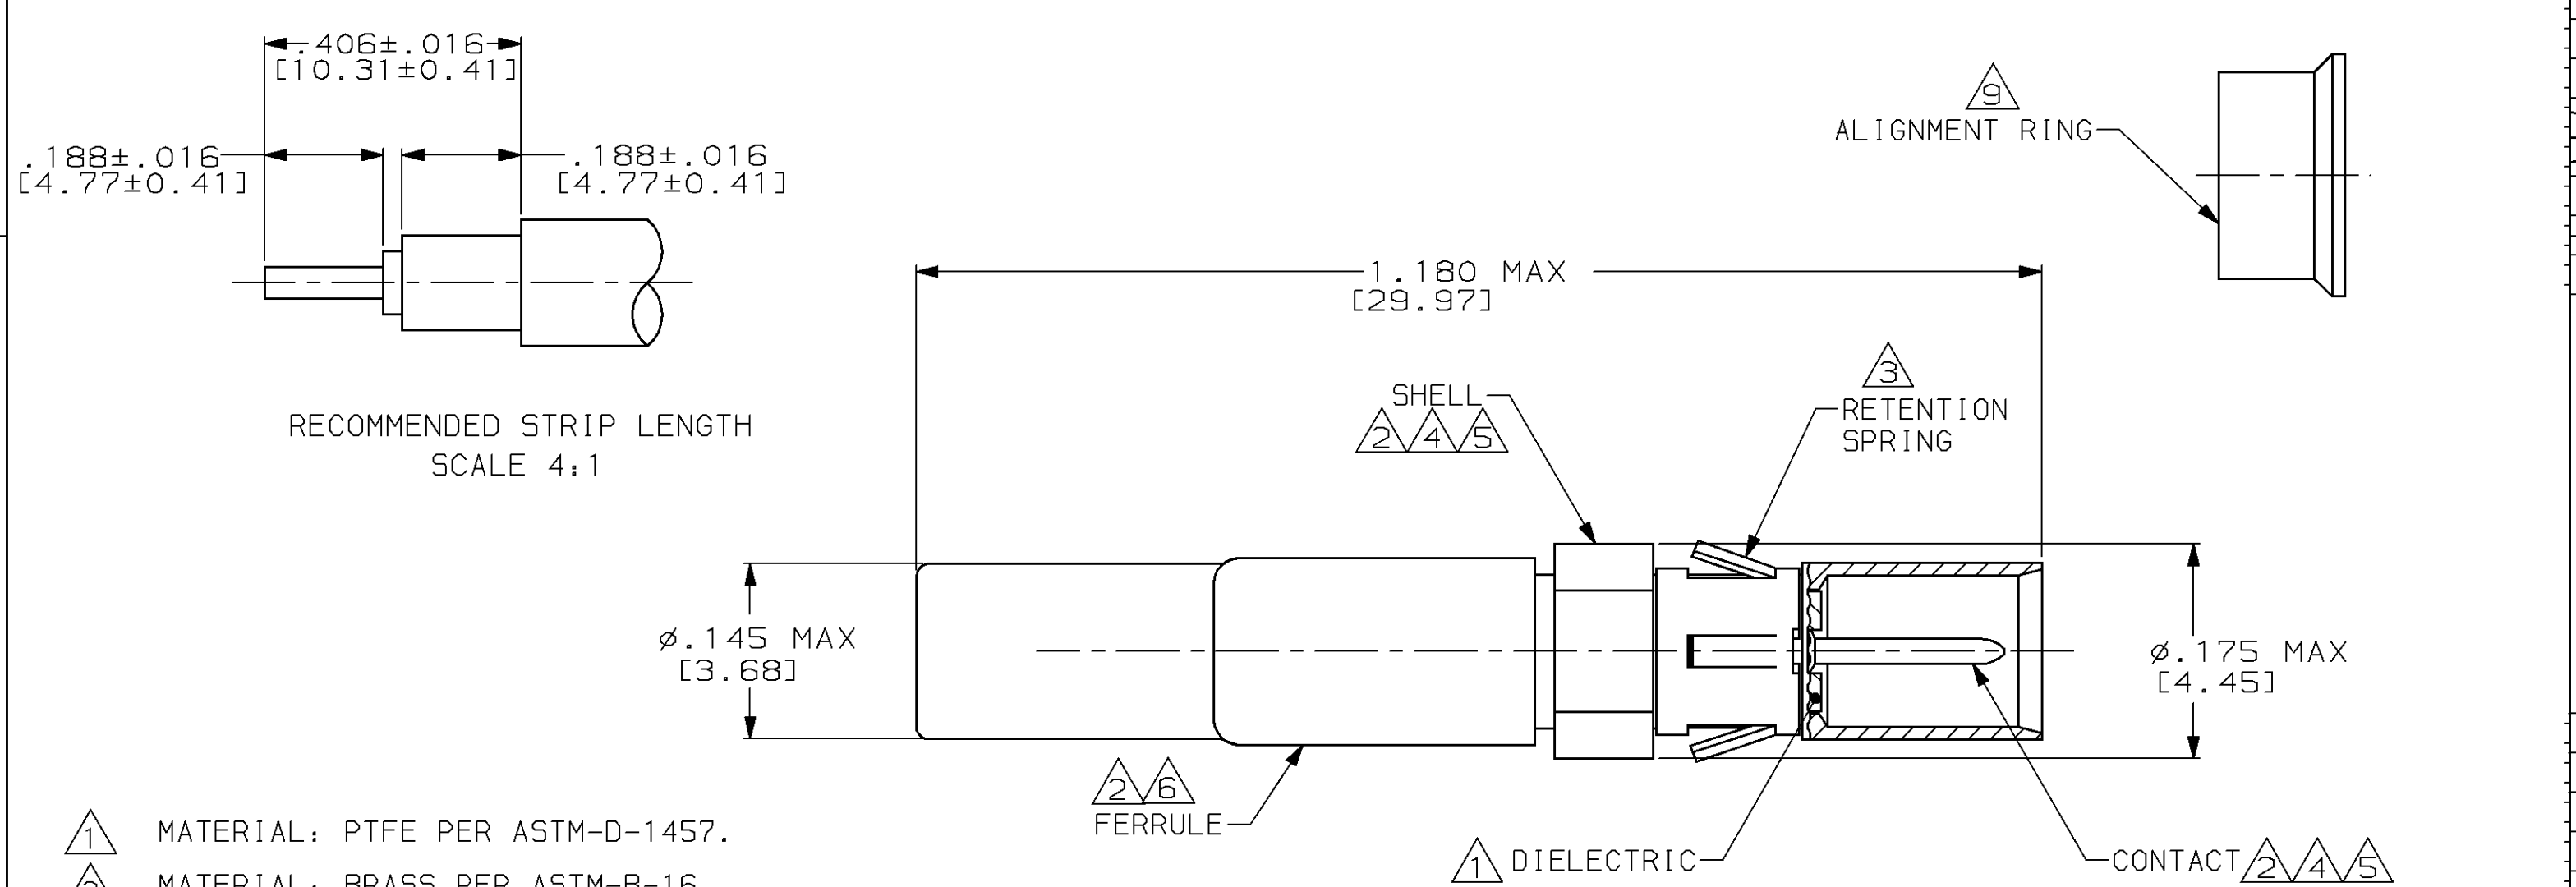

- 1 MATERIAL: PTFE PER ASTM-D-1457.
- 2 MATERIAL: BRASS PER ASTM-B-16.
- 3 MATERIAL: STAINLESS STEEL PER QQ-S-766.
- 4 FINISH: NICKLE PLATE PER QQ-N-290.
- 5 FINISH: DURAGOLD PLATE.
- 6 FINISH: TIN PLATE PER ASTM-B-545.
- 7. FOR USE WITH: RG-178U DBL BRAID, 196/U, MALCO #250-3908-0000 & TENSOLITE #30850/81T-1 CABLE.
- 8. .180 [4.57] MIN DIA HOLE REQUIRED FOR CONTACT TO FEED THROUGH P.C. BOARD.
- 9 ALIGNMENT RING IS USED TO STABILIZE CONTACT IN THE HOUSING CAVITY; OTHERWISE DISCARD.
- 10. SEE I.S. 2923 AND USE CRIMPING TOOL 220215-1.

				227605-1			
				PART NO			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± _____ 3 PLC DEC ± _____ ANGLES ± _____		DR 3-4-97 C.C.THOMAS		AMP AMP Incorporated Harrisburg, PA 17105-3608			
		CHK 3-4-97 J.WEAVER					
		APPD 3-4-97 J.WEAVER					
		RLSE 3-4-97 C.C.THOMAS					
MATERIAL 1 2 3		PRODUCT SPEC —		CONTACT, SOCKET, COAXIAL, MICROMINIATURE			
		APPLICATION SPEC —					
FINISH 4 5		WEIGHT —				SIZE B	
						CAGE CODE 00779	
				DRAWING NO 227605-1			
				SCALE 8:1			
				SHEET 1 OF 1			