



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION




20

© COPYRIGHT - BY - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
ES		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					C	REVISED PER ECR-21-100678	08APR2021	SS	VS

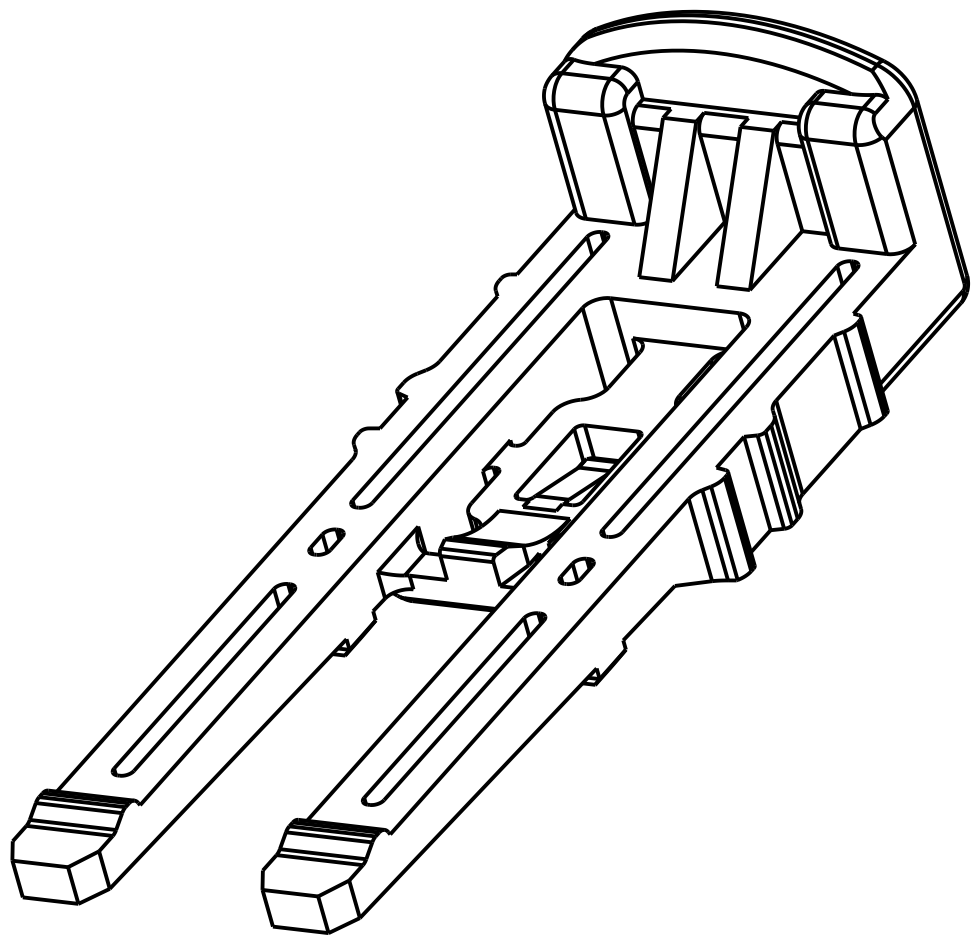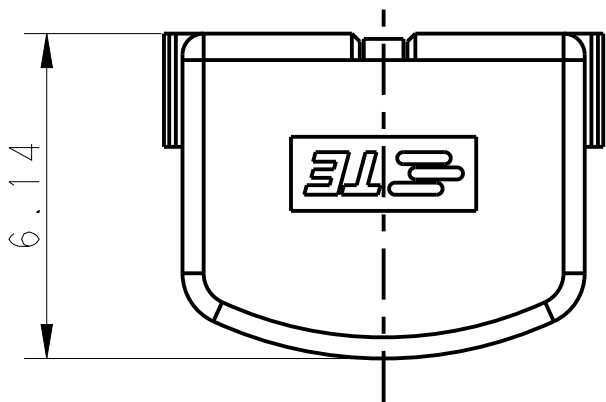

- 1 MATERIAL:
LEVEL 2: NYLON (PA66), HIGH TEMPERATURE 150°C
- 2 PRODUCT SPEC:108-106118, 108-106147
- 3 APPLICATION SPEC:114-106118, 114-106147
- 4 APPLICABLE MATED PLUG HOUSING P/N:
-1971773-/*-1971776-*/*-1971876-*/
-2232265-/*-2232266-*/*-2232357-*/*-2232362-*
- 5 FLAMMABILITY RATED UL94 V-0

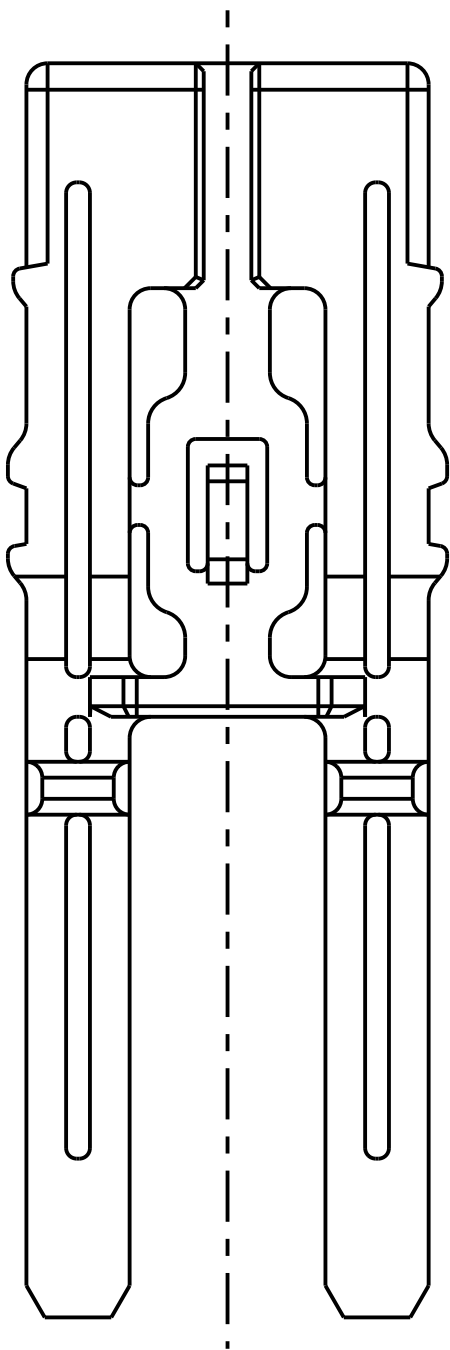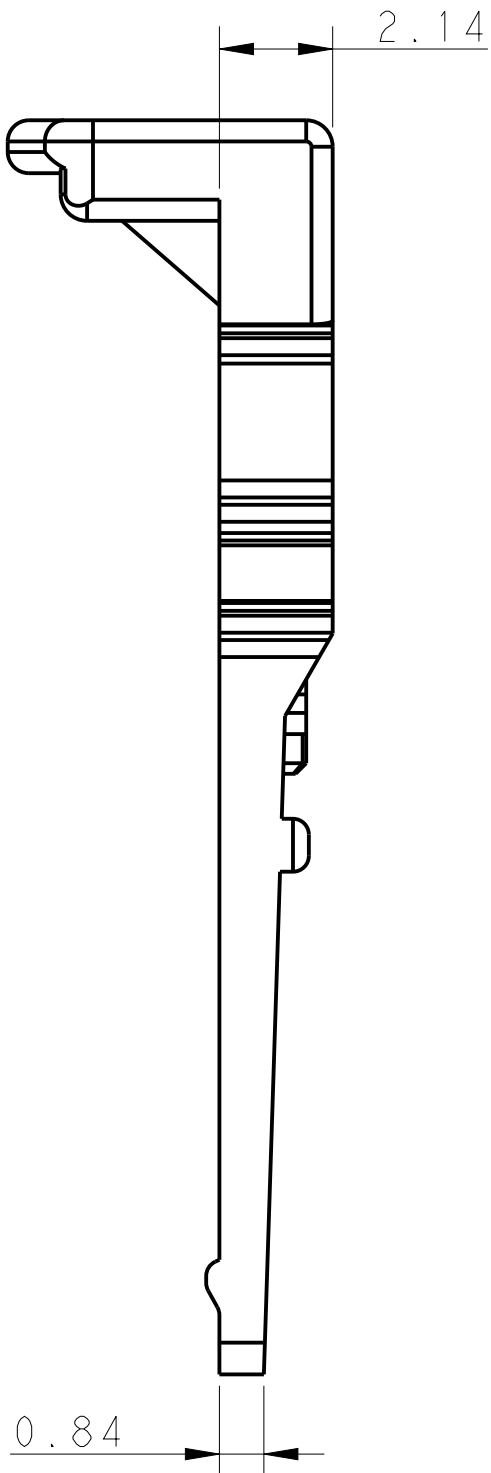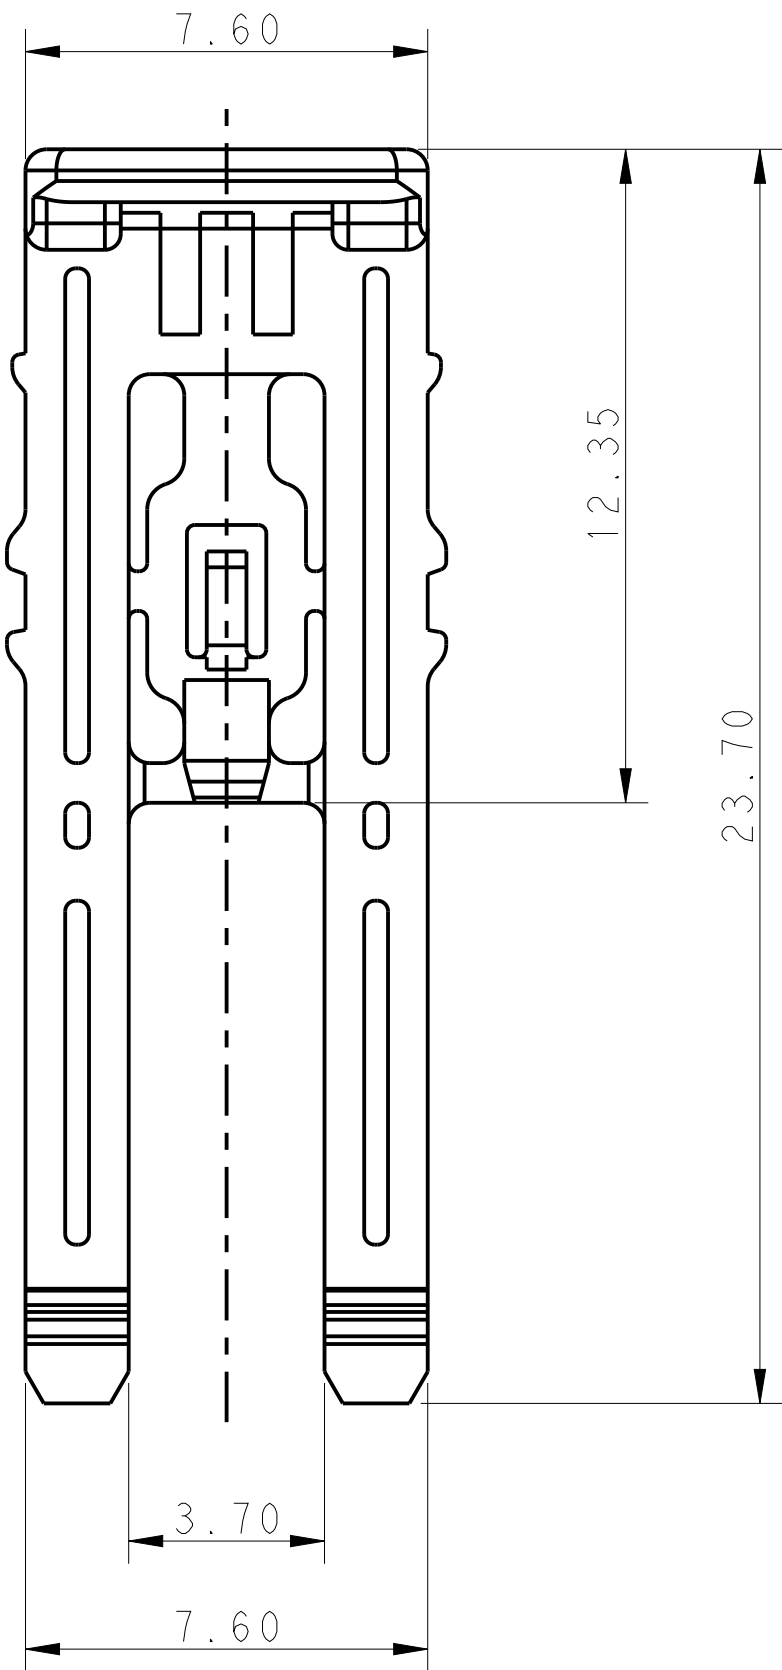

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±0.35

2 PLC ±0.25

3 PLC ±

4 PLC ±

ANGLES ±

FINISH

DWN TOMMY WU 11JUL2012

CHK HAPYE WU 11JUL2012

APVD YUHONG MAO 11JUL2012

PRODUCT SPEC 2

APPLICATION SPEC 3

WEIGHT -

Customer Drawing

RED LEVEL 2 1971789-1

COLOR MATERIAL P/N

TE Connectivity

CONNECTOR POSITION ASSURANCE(CPA)
POWER TRIPLE LOCK

SIZE A200779CAGE CODE 01971789DRAWING NO 1971789RESTRICTED TO -

SCALE 7:1SHEET 1 OF 1REV C