
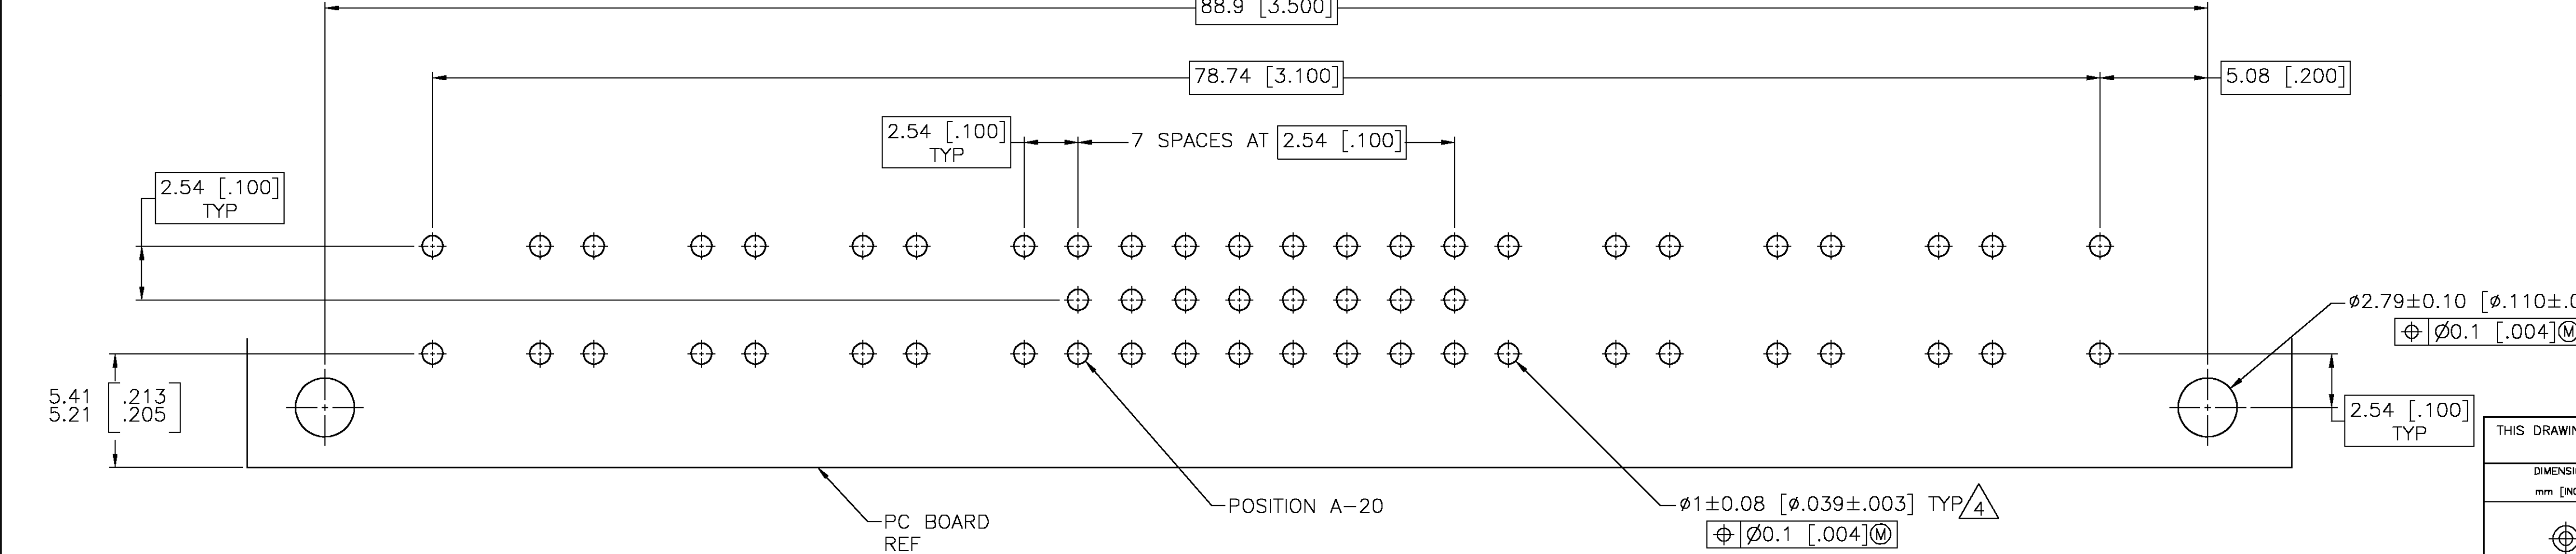
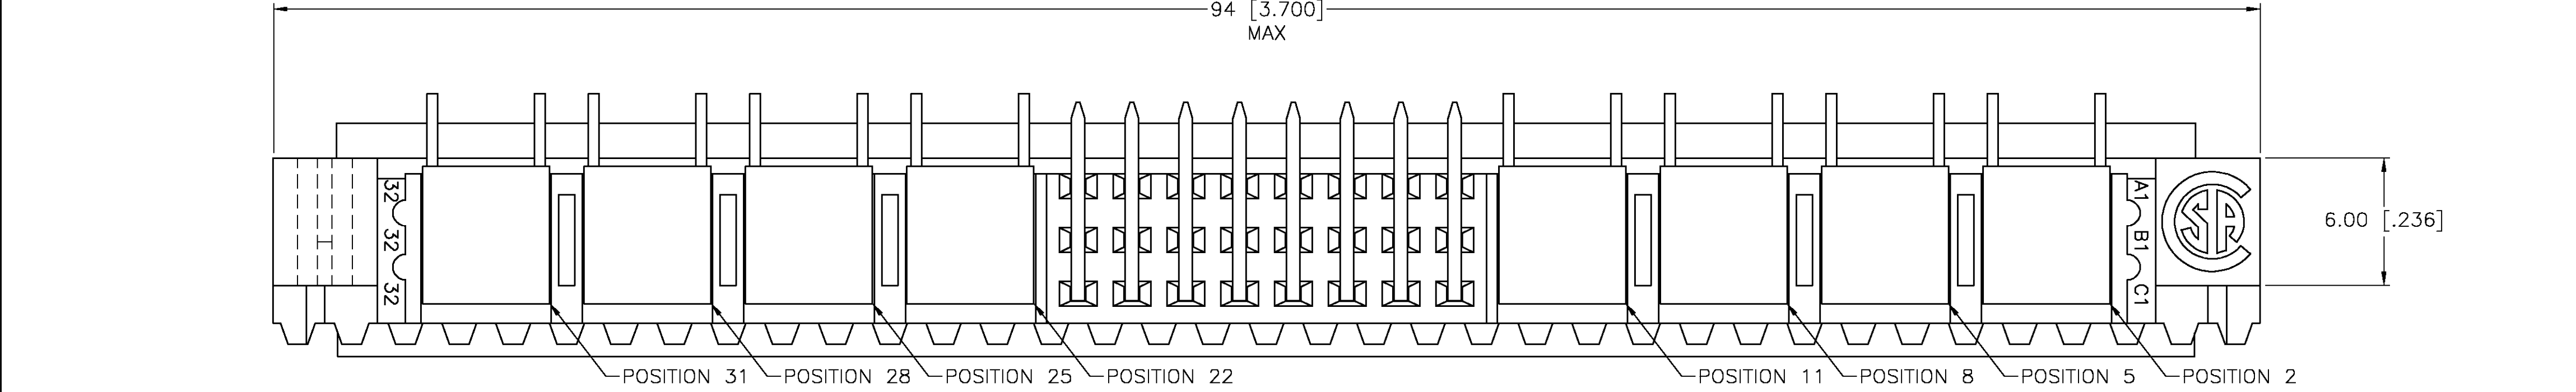
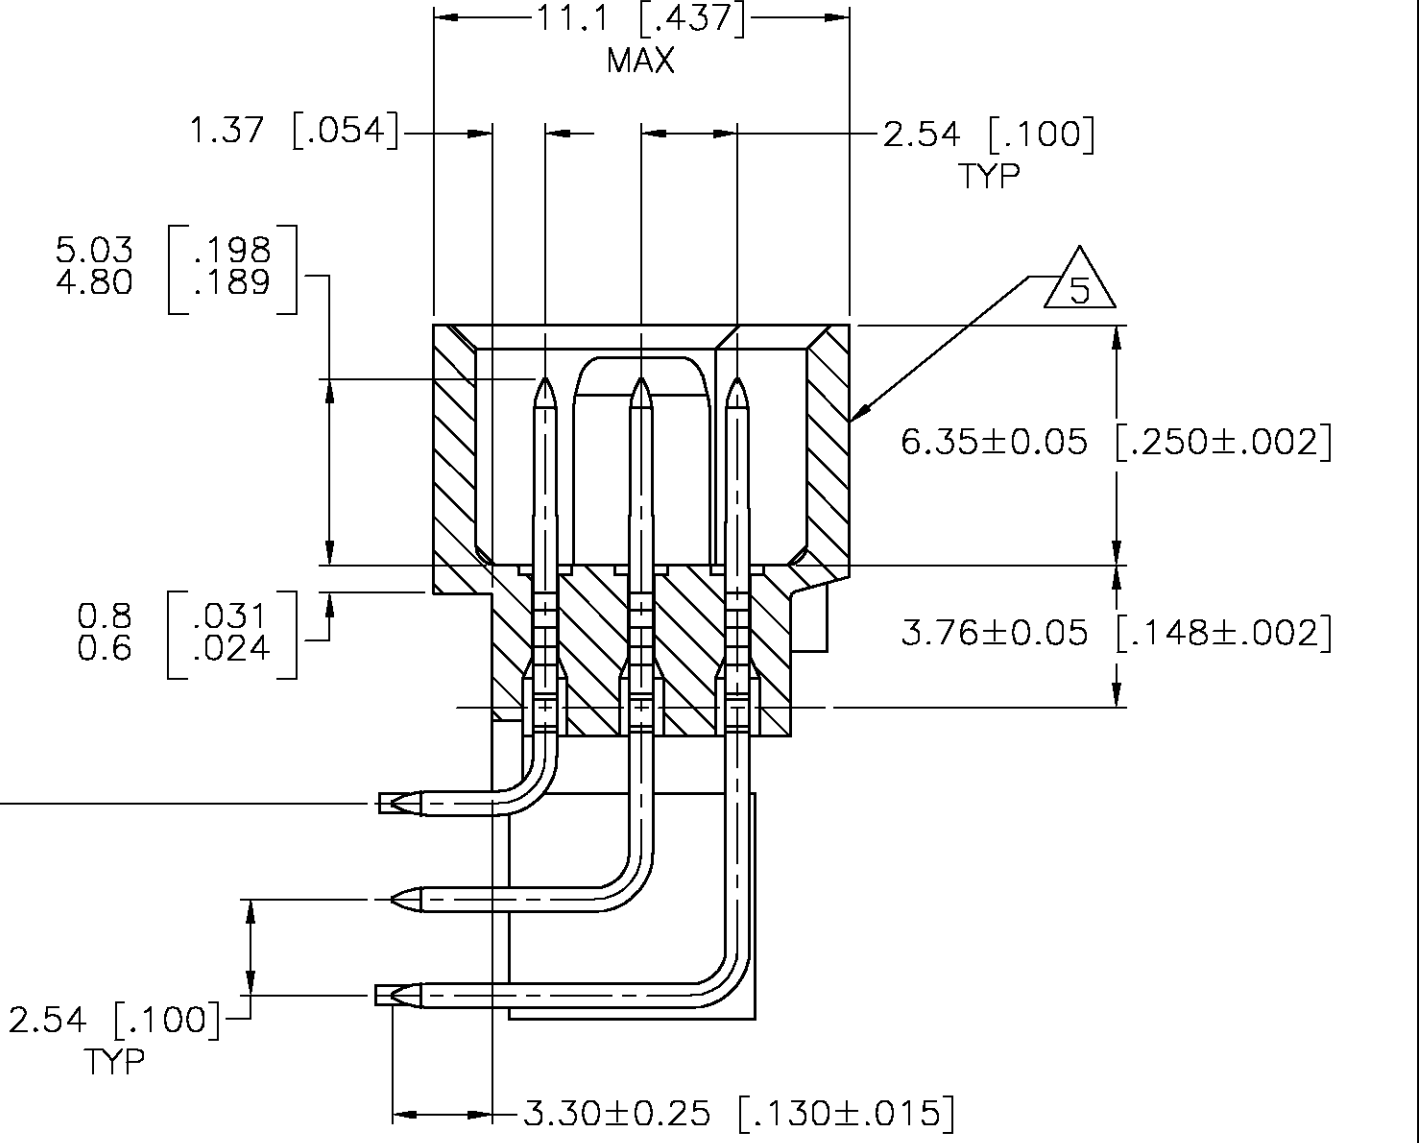
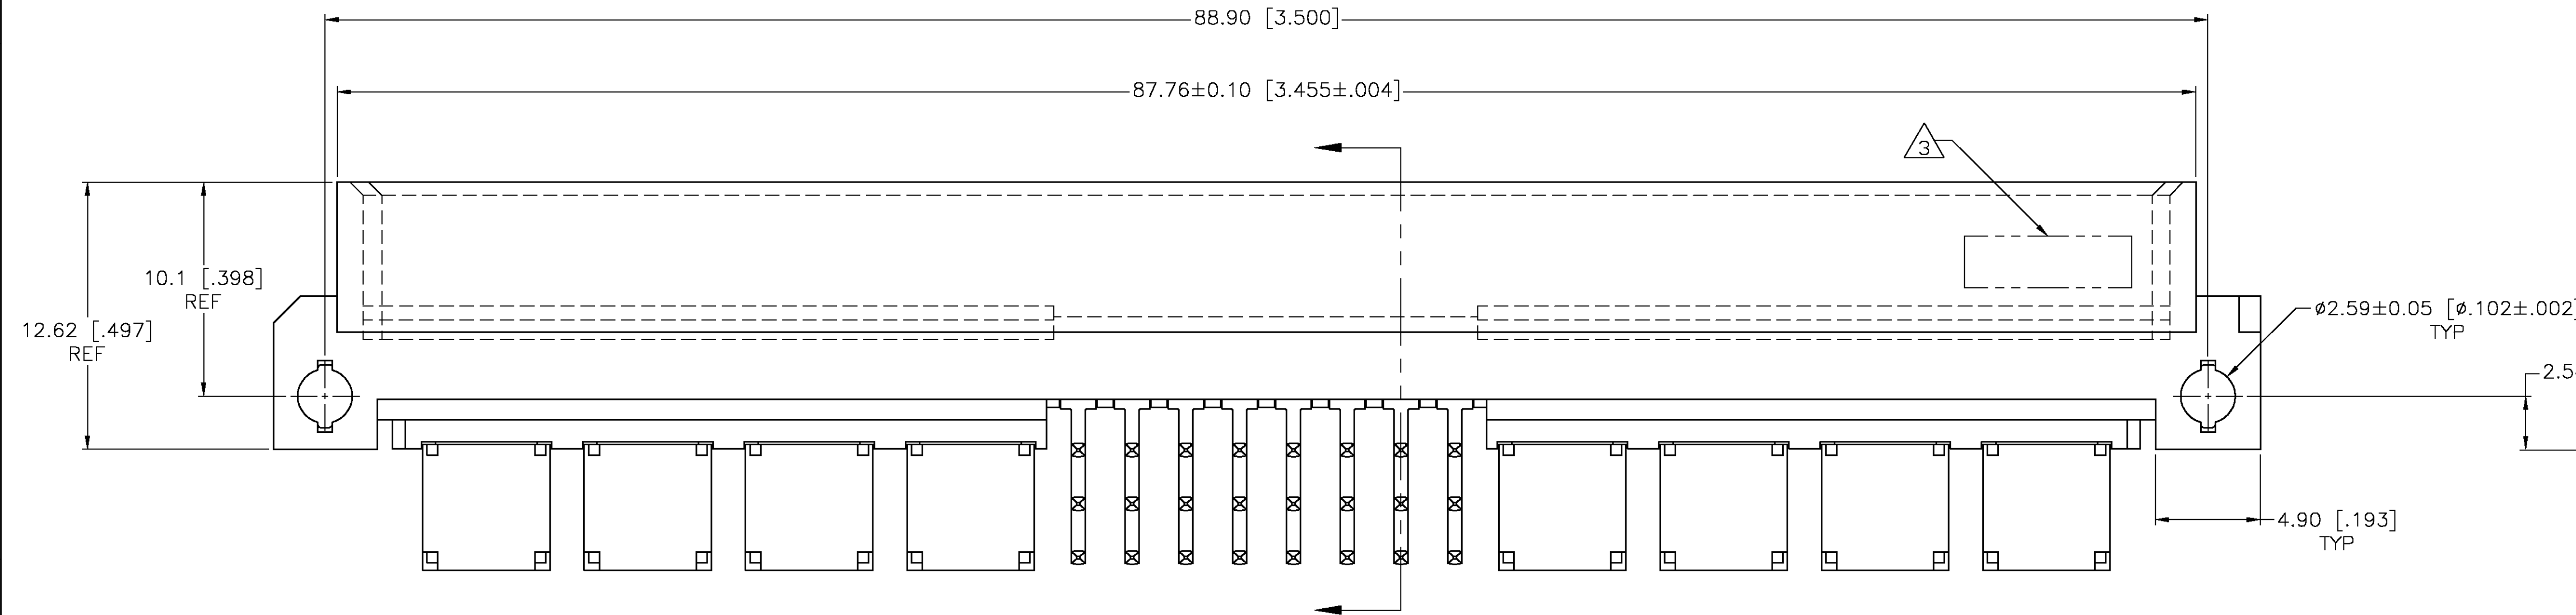


LOC	DIST	REVISIONS				
		F	LTR	DESCRIPTION	DATE	OWN
AD	00	O		REV PER EC 0512-0304-04	14JUN04	NK

- 1
- HOUSING: GLASS-FILLED POLYESTER, GRAY.
SIGNAL CONTACT: BRASS.
POWER CONTACT: COPPER ALLOY.
- 2
- SIGNAL CONTACT: DIN 41612 CLASS 1 IN CONTACT AREA,
TIN-LEAD PLATE ON POSTS.
POWER CONTACT: DIN 41612 CLASS 1 IN MATING AREA.
- 3
- PART NUMBER AND DATE CODE MARKED IN THIS
APPROXIMATE AREA.
- 4
- RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION
OF CONNECTOR ONTO PC BOARD.
- 5
- MARKING ON THIS SIDE.

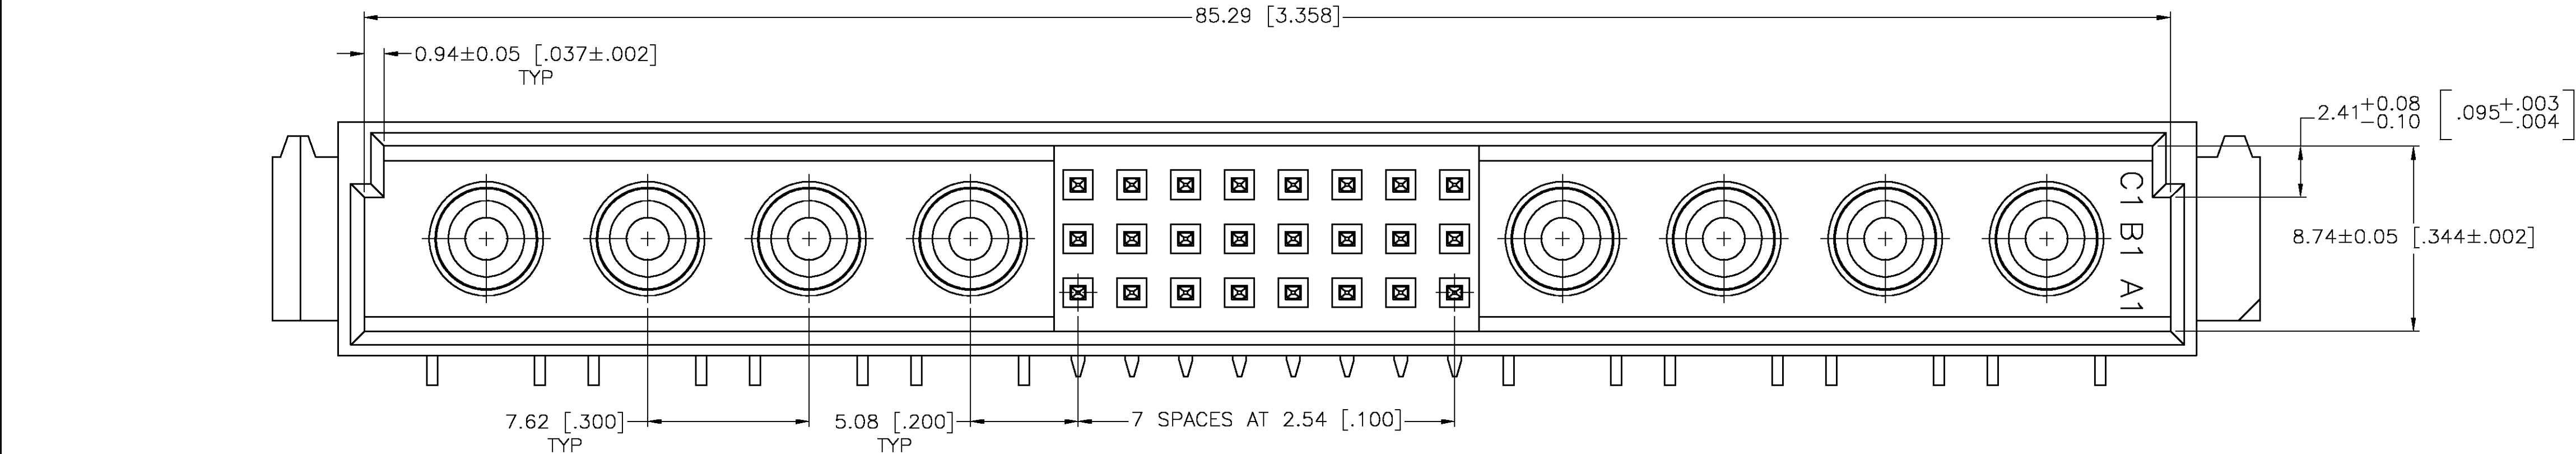

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN B CARBO 16MAR04	16MAR04	16MAR04	16MAR04	16MAR04
DIMENSIONS: mm [INCHES]		0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± -	4 PLC ± -
TOLERANCES UNLESS OTHERWISE SPECIFIED:		0.13 [.005]	0.13 [.005]	0.13 [.005]	0.13 [.005]	0.13 [.005]
MATERIAL		1	2	3	4	5
FINISH		1	2	3	4	5
WEIGHT		—	—	—	—	—
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 of 1	REV Q	RESTRICTED TO	