
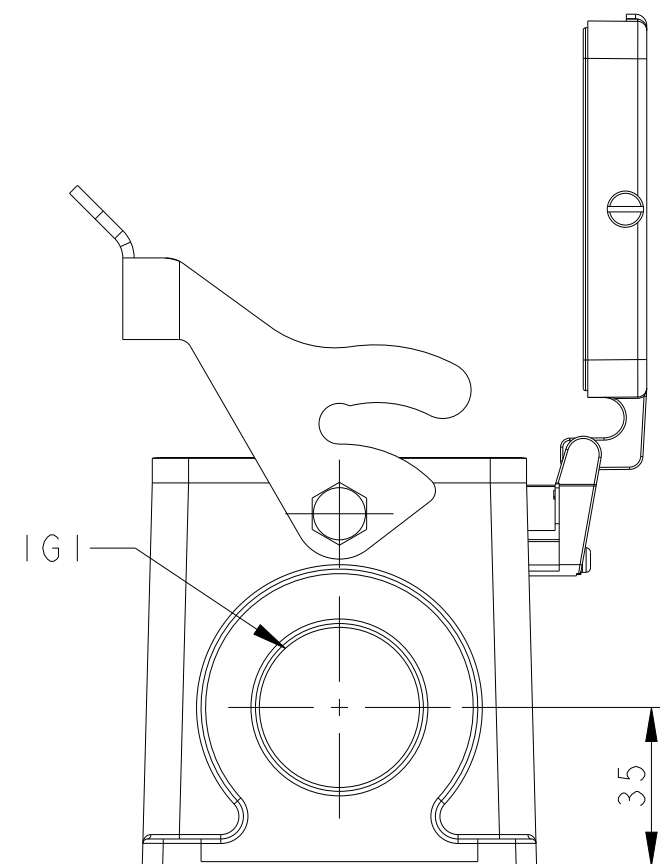
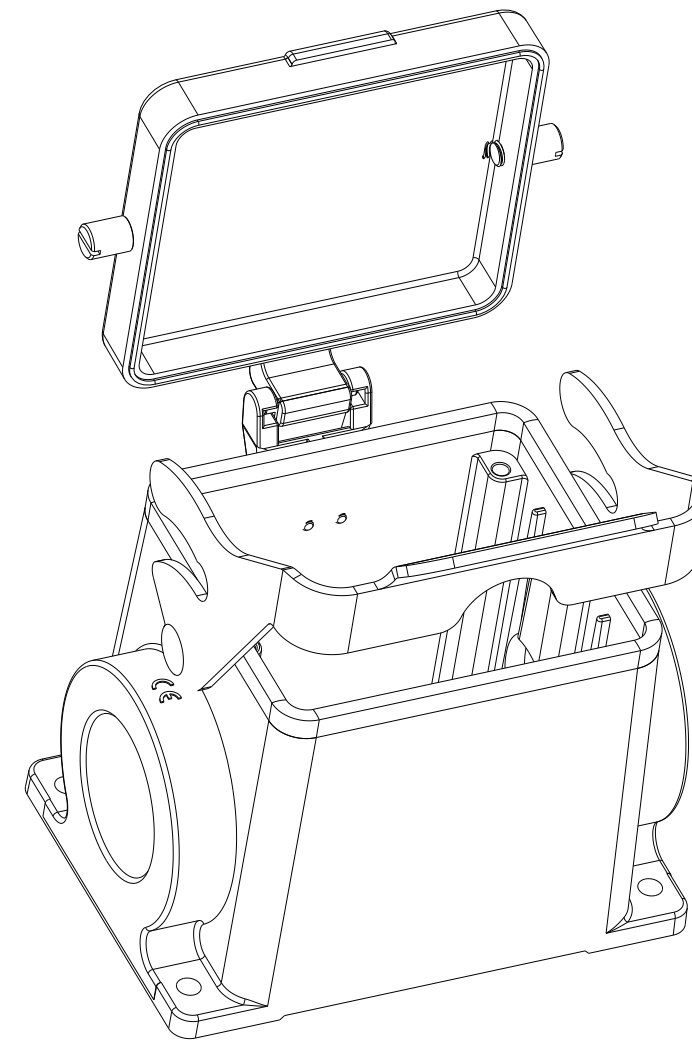


REVISIONS					
P	LTR	DESCRIPTION	DATE	OWN	APVD
	A	INITIAL RELEASE	04JUN2015	DL	CW
	B	ECR-21-109004	19AUG2021	WQR	CW



防护等级：IP65(配合)

T1620320129-000	H32B-SDR-LB-PG29	PG29	-
T1620322132-000	H32B-SDR-LB-M32	M32	-
T1620320136-000	H32B-SDR-LB-PG36	PG36	-
T1620320140-000	H32B-SDR-LB-M40	M40	-
T1620320142-000	H32B-SDR-LB-PG42	PG42	-
T1620320150-000	H32B-SDR-LB-M50	M50	-
T1620320229-000	H32B-SDR-LB-2PG29	PG29	PG29
T1620320232-000	H32B-SDR-LB-2M32	M32	M32
T1620320236-000	H32B-SDR-LB-2PG36	PG36	PG36
T1620320240-000	H32B-SDR-LB-2M40	M40	M40
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 04JUN2015 CHR CHR 04JUN2015 CHRIS WANG APVD XU XIANG 04JUN2015		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±. 3 PLC ±. 4 PLC ±. ANGLES ±.		NAME H32B-SDR-LB-PG/M	
MATERIAL - -		PRODUCT SPEC 108-137013 APPLICATION SPEC 114-137013		SIZE A2	CAGE CODE -
FINISH - -		WEIGHT -		DRAWING NO C-T162032XXXX000	
Customer Drawing				SCALE 3.5	SHEET 1 OF 1
				REV	B