


LTR	DESCRIPTION	DATE	BY
-	Released	6/14/99	JCL

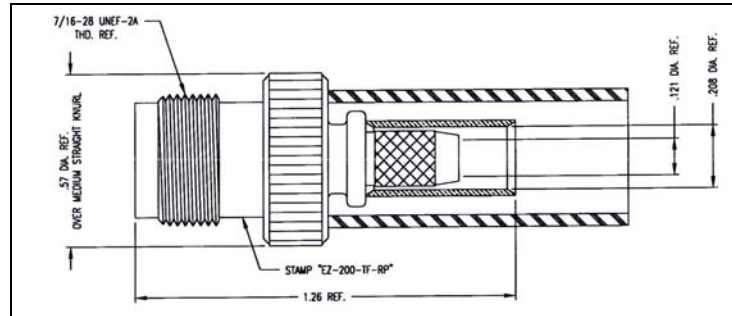

I. MATERIALS & FINISHES

center contact: Gold Plated Beryllium Copper – male pin
 outer contact: Alballoy Plated Brass
 body: Alballoy Plated Brass
 crimp sleeve: Alballoy Plated Copper
 dielectric: Teflon® PTFE
 shrink sleeve: Adhesive Lined Polyolefin
 crimp size: .213" hex (M22520/5-19)

II. ELECTRICAL PROPERTIES

impedance: 50 ohms
 working voltage: 500 vrms (max)
 vswr: 1.25:1 (max) up to 3 GHz
 insertion loss: $0.1 \times \sqrt{F_{\text{ghz}}}$

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals

Drawn	JCL	6/14/99
Check		
Prj. Mgr.		
Prd. Mgr.		
QA Mgr.		



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

EZ-200-TF-RP

**Reverse Polarity TNC Female (male pin)
 for LMR-200 Cable**

Size A	CAGE CODE 68999	Drawing No.: 3190-793
-----------	---------------------------	---------------------------------

Scale: NA

Rev. ()

Sheet: 1 of 1