
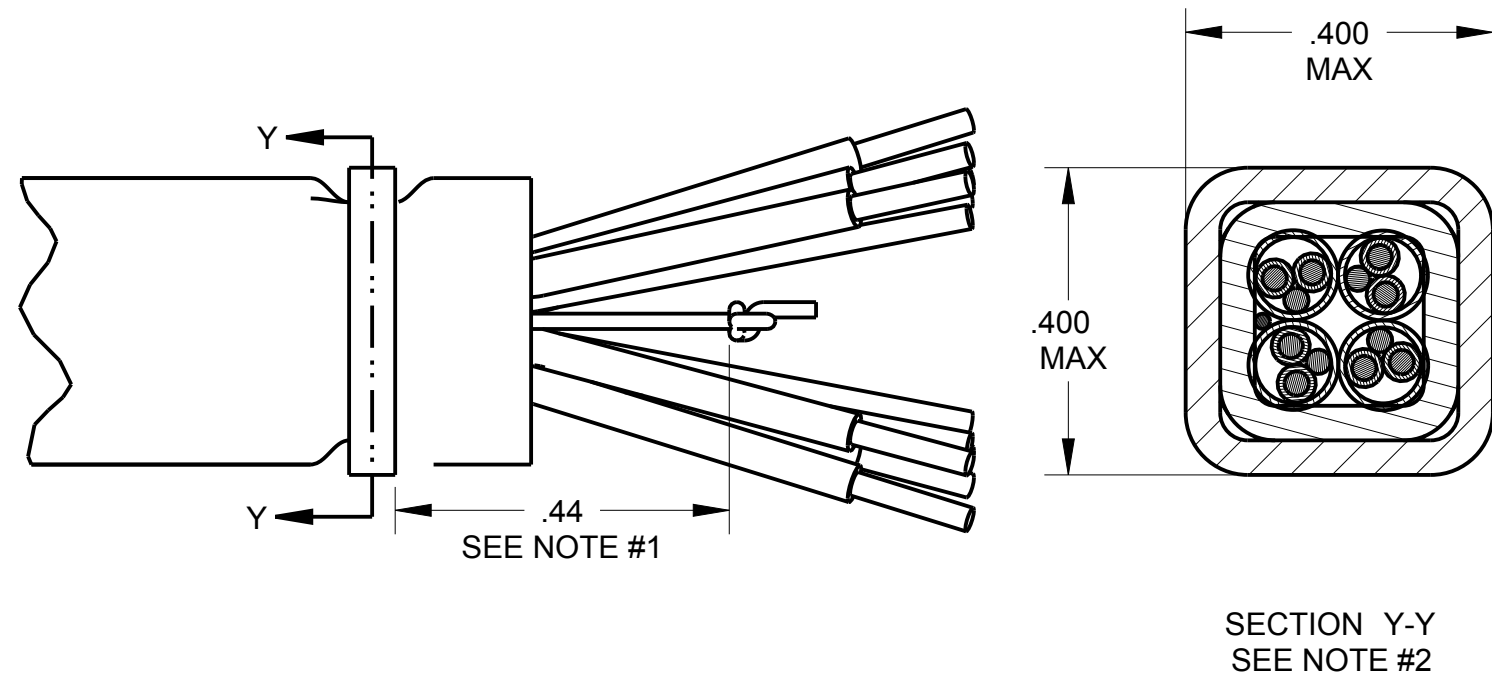
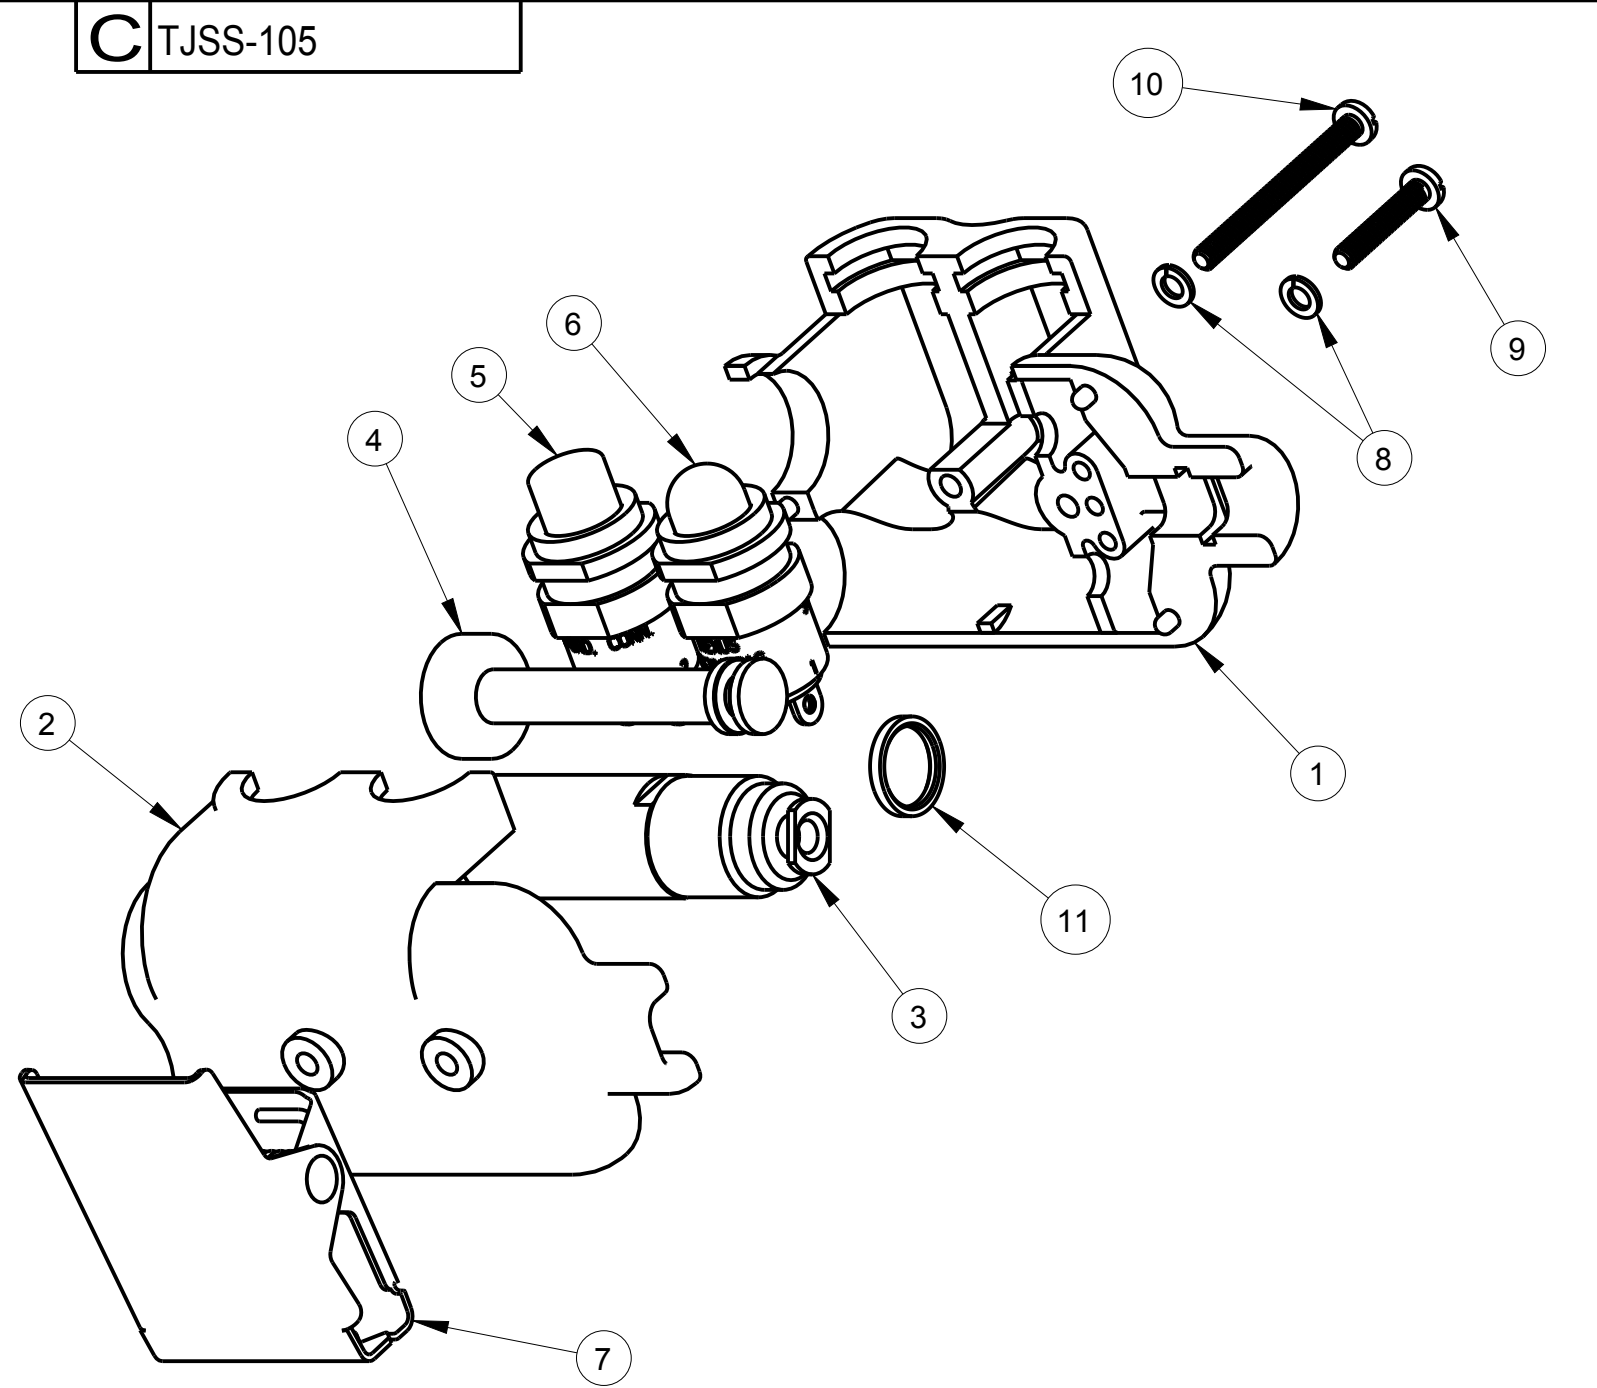
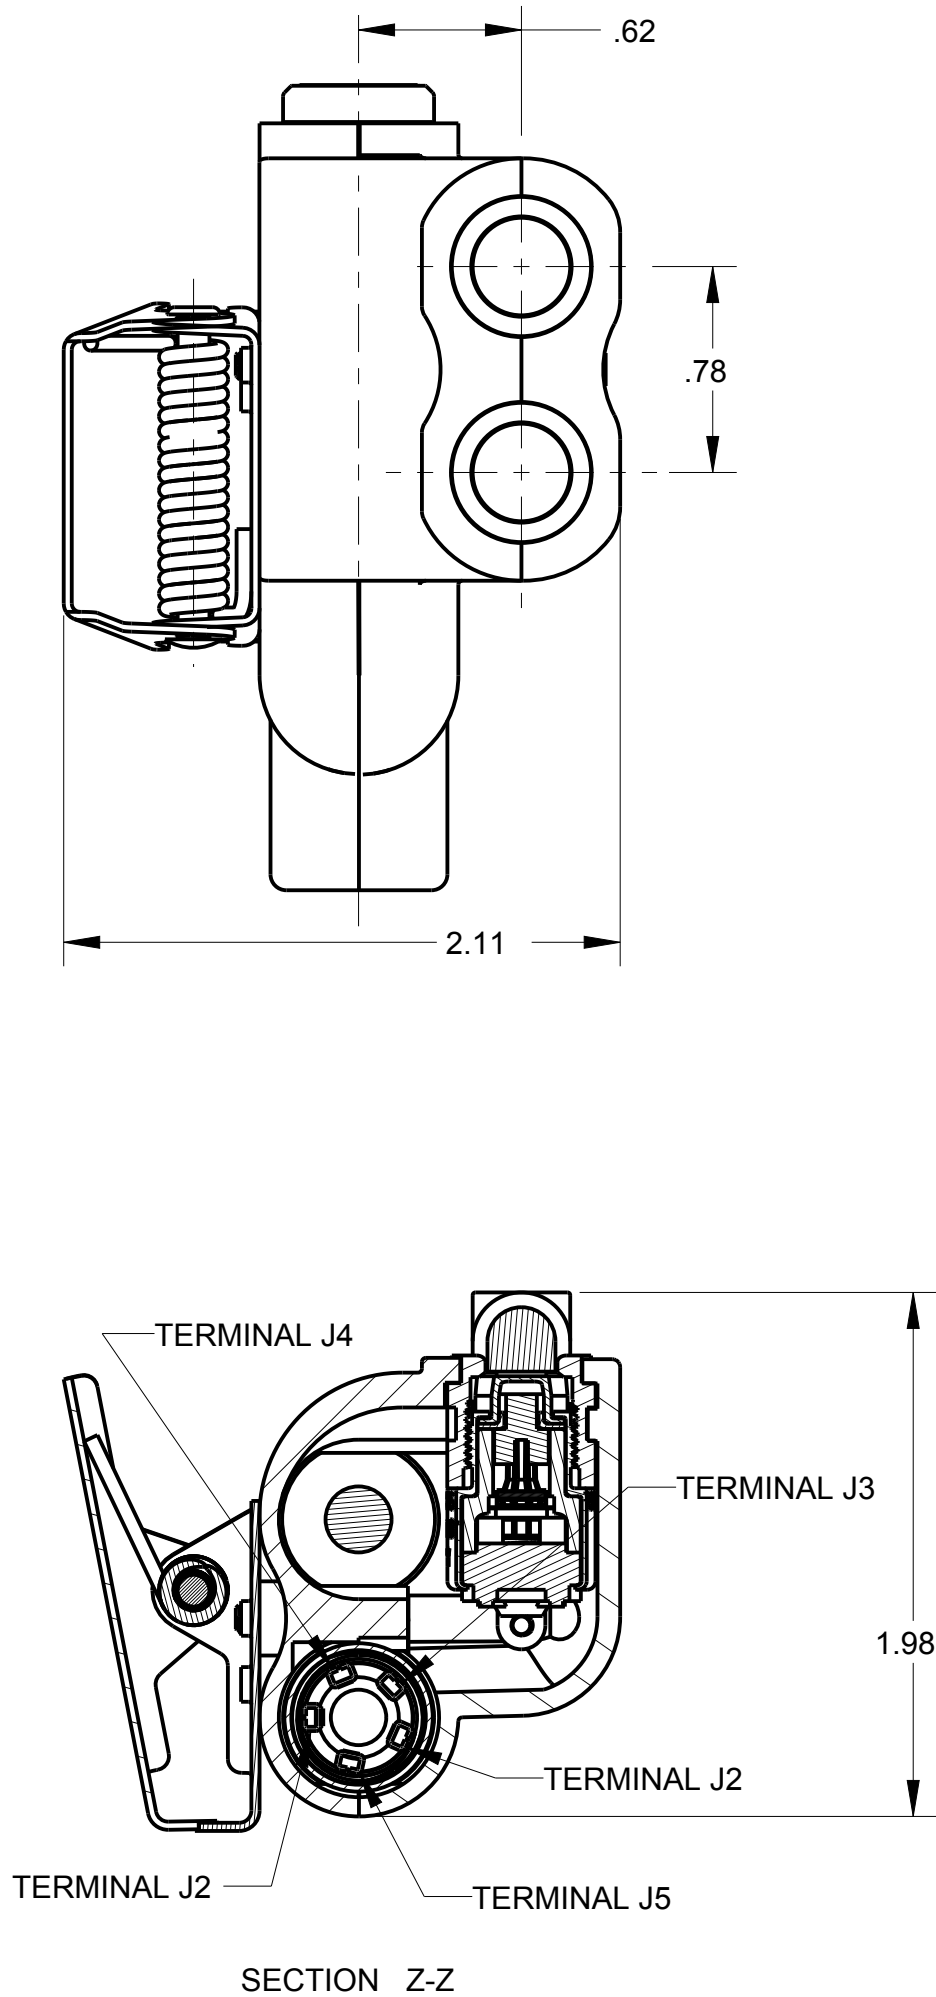


ITEM #	PART #	QTY	DESCRIPTION
1	TJSS-106-1	1	SHELL, HALF
2	TJSS-106-2	1	SHELL, HALF
3	TJ-110-21	1	JACK ASSEMBLY
4	TJSS-106-11	1	FILLER, PLUG
5	NX301LB1B	1	SWITCH MOMENTARY
6	NX301LB1G	1	SWITCH MOMENTARY
7	TJS-104-3A	1	STAINLESS STEEL CLIP ASSEMBLY
8	TJ-106-13	2	#4 WASHER, LOCK
9	TJS-106-19	1	SCREW
10	TJSS-106-3	1	SCREW
11	TJSS-106-6	1	CRIMP RING

NOTES:
1) STAY CORD - VARNISH KNOT
2) STRAIN RELIEF CLAMP TJSS-106-6
AFTER CRIMPING

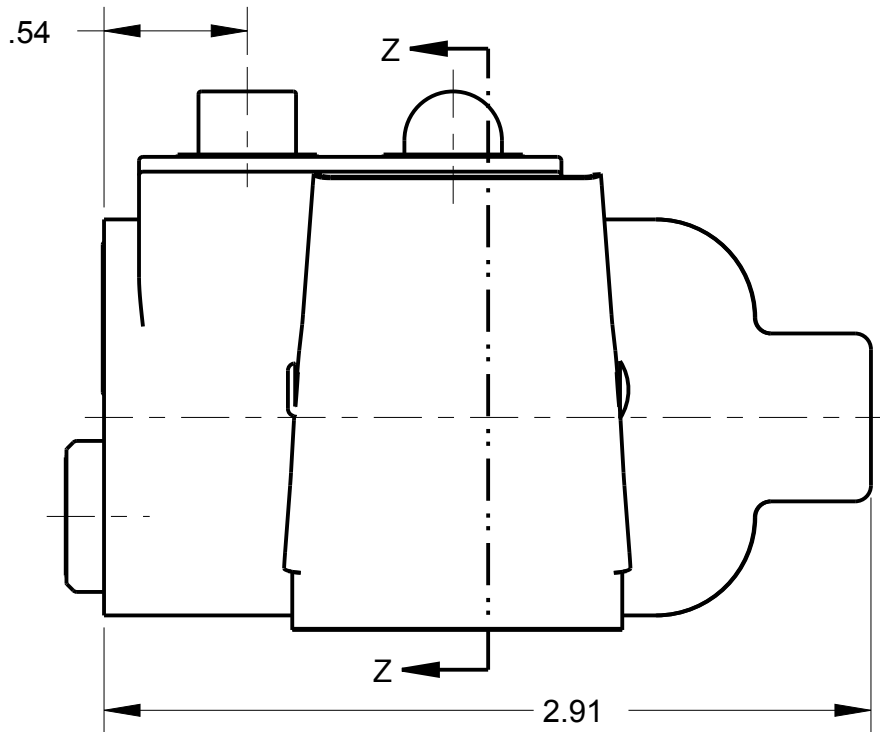

WIRING OPTIONAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

										DWN.BY MNF	DATE 2/11/99	MATERIAL									
										CHECKED BY	DATE	FINISH									
										APPR.BY	DATE	WEIGHT		SCALE = 1.00 :1		NEXUS STAMFORD,CONN					
										TITLE JACK-TELEPHONE-BIAXIAL SHIELDED 5-CONDUCTOR WITH 2 SWITCHES											
										UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & OR (mm)											
										TOLERANCES: DECIMAL: ±XX(X.X) ±XX(X.XX) ±XXX(X.XXX) ±.00(X) ±.00(X.0X) ±.000(X.0XX)											
B	CHG: TJ-110-4 TO TJ-110-6; 2-39/64 TO 2-91; 2-3/64 TO 2-11					218	2/13	2015	HR	FRACTION: ±XXX ±XXX		ANGLES: ±X ° ±X'		DO NOT SCALE DWG.		SHEET 1 OF 1		SIZE C		DWG. NO. TJSS-105	
LET.	REVISION					CN #	DATE	CHK													