THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REV PER ECO 20-012150	9-15-20	CT	FB

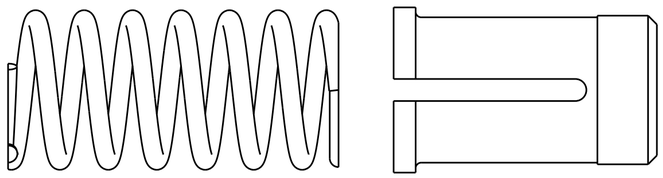

SPRING AND ADAPTOR KIT FOR .086 CABLE △5

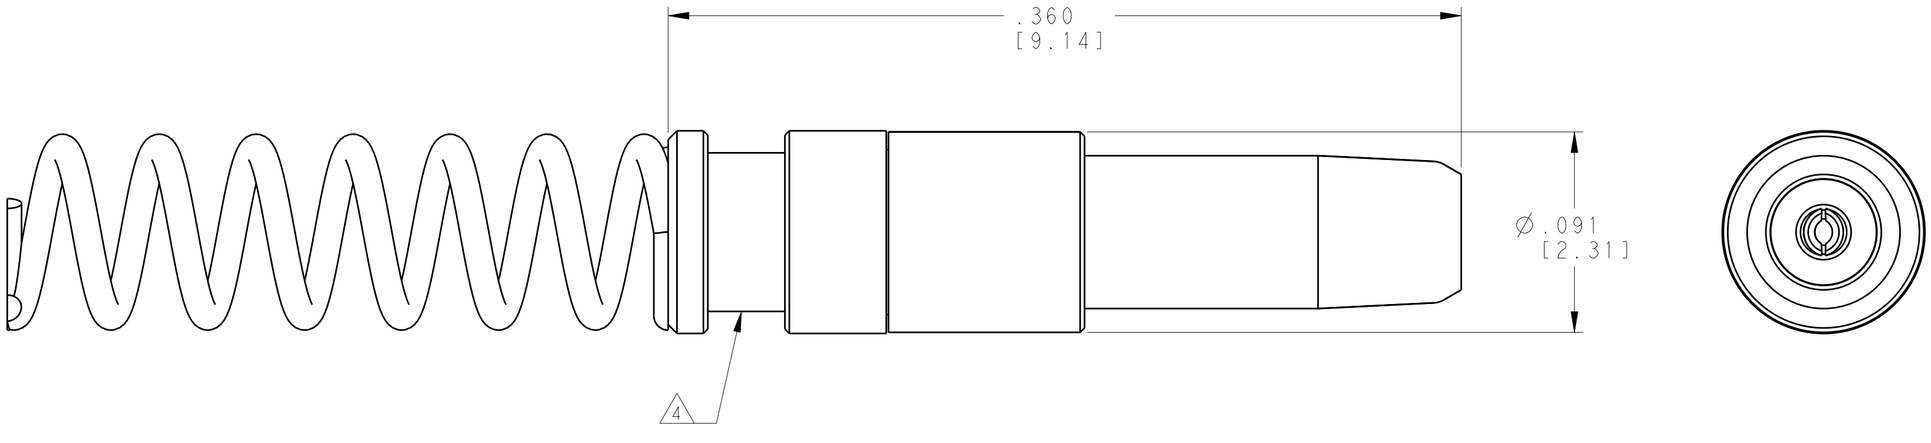

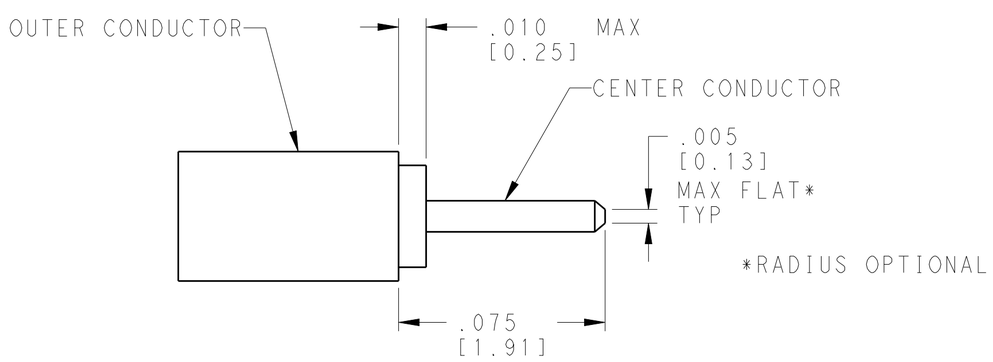

SCALE 25:1
CABLE PREPARATION FOR
Ø.047 SEMI-RIGID CABLES

△1 MATERIAL:
BODY AND CENTER CONTACT: COPPER ALLOY
INSULATOR: TEFLON (PTFE)
SPRING: STAINLESS STEEL

△2 FINISH: FRONT BODY AND CENTER CONTACT: 50-90 µIN GOLD PLATE OVER NICKEL
REAR BODY: 3-15 µIN GOLD PLATE OVER NICKEL

3. SPRING IS SHIPPED LOOSE FROM CONTACT ASSEMBLY

△4 RETENTION GROOVE REQUIRED FOR .086 ADAPTER KIT.

△5 CONTAINS 2302345-2 AND ADAPTER KIT 2373609-1.

6. DEPENDING ON DATE OF MANUFACTURE, THE RETENTION GROOVE NAY OR MAY NOT BE FOUND ON INVENTORY ON 2302345-1.

REMARKS	PART NO.
△5	2302345-3
△4	2302345-2
--	2302345-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005[0.13]
4 PLC ±-
ANGLES ±

MATERIAL △1

FINISH △2

DWN K. MILLER 31MAY2016
CHK D. WILSON 31MAY2016
APVD D. WILSON 11APR2018
PRODUCT SPEC 108-163006
APPLICATION SPEC 408-163016
WEIGHT -

TE Connectivity

NAME NanoRF PIN CONTACT ASSEMBLY
-
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2302345	-

CUSTOMER DRAWING | SCALE 20:1 | SHEET 1 OF 1 | REV B