

# UM11496

PN7160 evaluation board

Rev. 1.2 — 13 September 2021

User manual  
COMPANY PUBLIC

## Document information

Information	Content
Keywords	OM27160, PN7160, PN7161, evaluation kit
Abstract	This document is the user manual of the PN7160/PN7161 evaluation board.



## 1 Revision history

### Revision history

Rev	Date	Description
1.2	20210913	Security status changed into "Company public", no content change
1.1	20210825	<ul style="list-style-type: none"><li>• Web link updated</li><li>• Security status changed into "Company proprietary"</li></ul>
1.0	20210706	Initial version

## 2 Introduction

---

The present document describes the OM27160 evaluation board, a flexible and easy-to-use NFC controller board featuring PN7160.

It enables the development of an NFC solution based on PN7160 in a Linux or Android environment or even in system based on RTOS or without OS.

It exists in 2 configurations, the only difference is then physical host interface exposed:

- OM27160A1HN featuring PN7160A1HN sample offering I<sup>2</sup>C host interface
- OM27160B1HN featuring PN7160B1HN sample offering SPI host interface


This document presents first an overview of the board, then it gives printed circuit boards details, and finally it provides information for reuse of the kit in different environments.

### 3 OM27160 board overview

The OM27160 board is high performance fully NFC-compliant expansion board, meeting compliance with reader mode, P2P mode and card emulation mode standards.

The board features an integrated high performance 40 mm \* 40 mm RF antenna to insure high interoperability level with NFC devices.

It has to be used in association with one interface board according to the targeted user environment. For this purpose, it integrates the NFC generic interface allowing assembly with OM29110 Interface boards (see [\[1\]](#)).

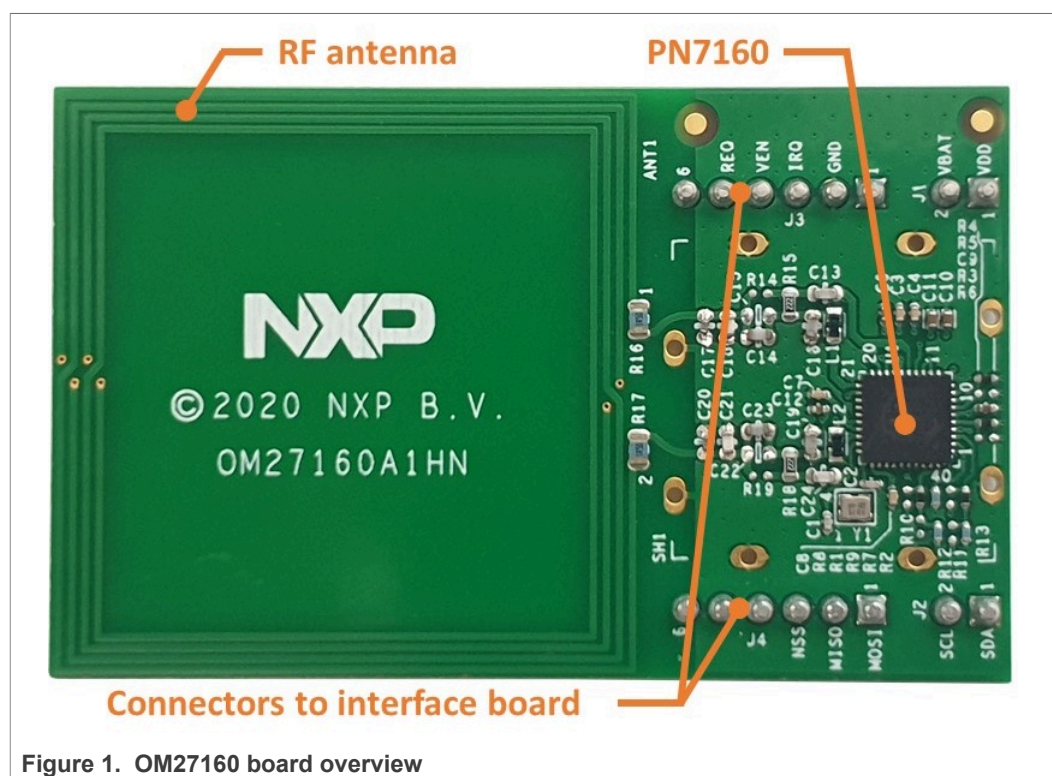

4 OM27160 board details

4.1 Schematics

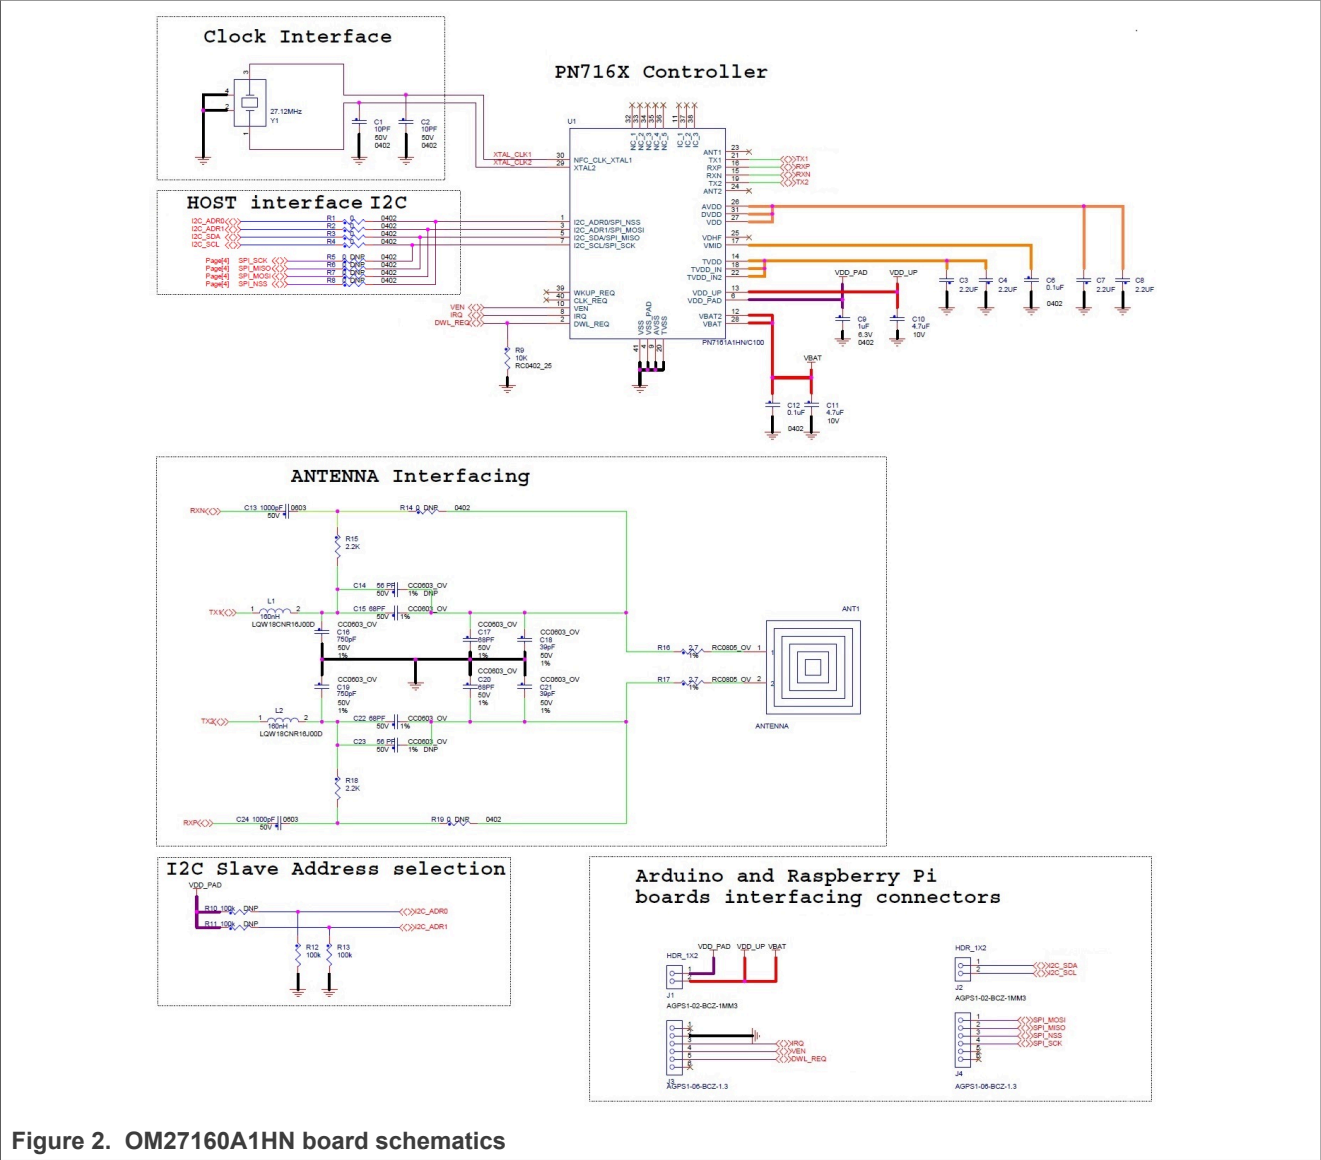
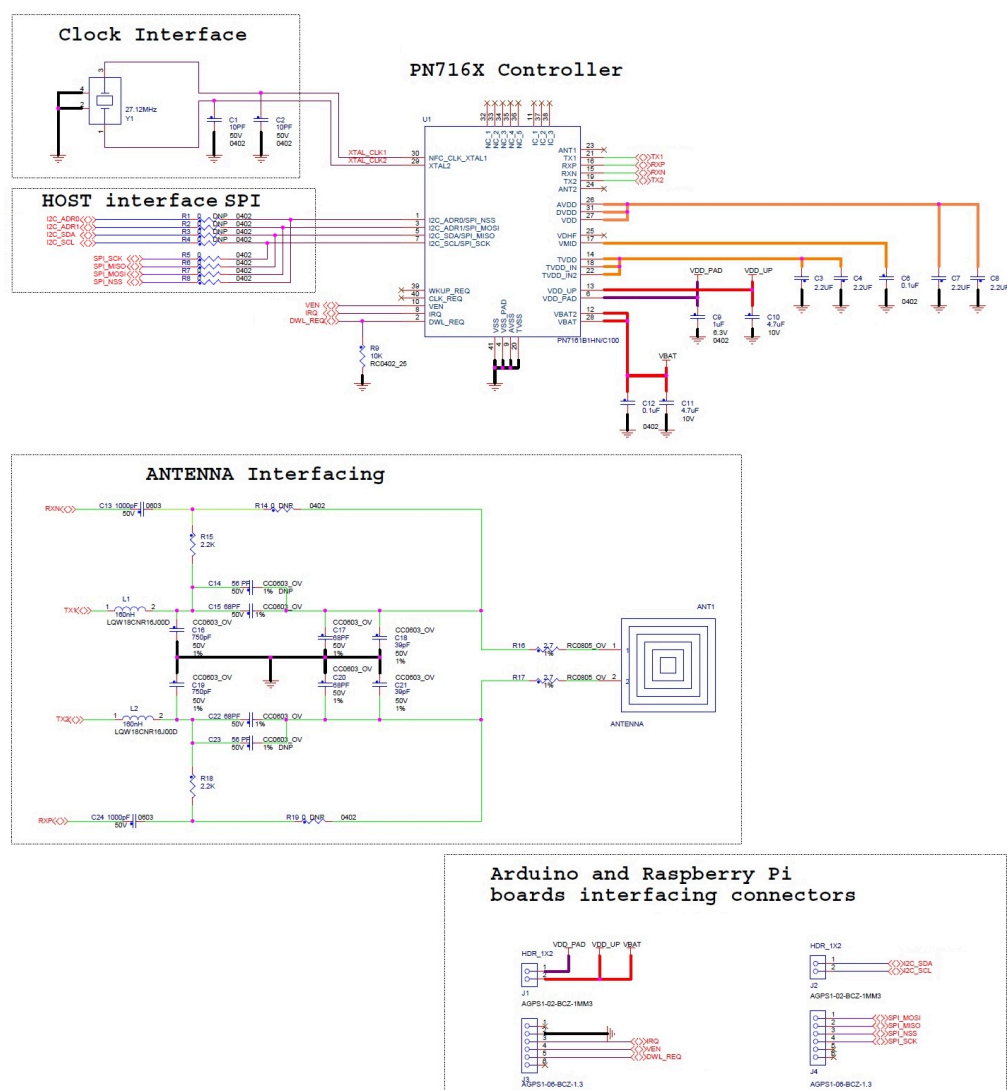


Figure 2. OM27160A1HN board schematics



**Figure 3. OM27160B1HN board schematics**

4.2 Layout

4.2.1 Components layers

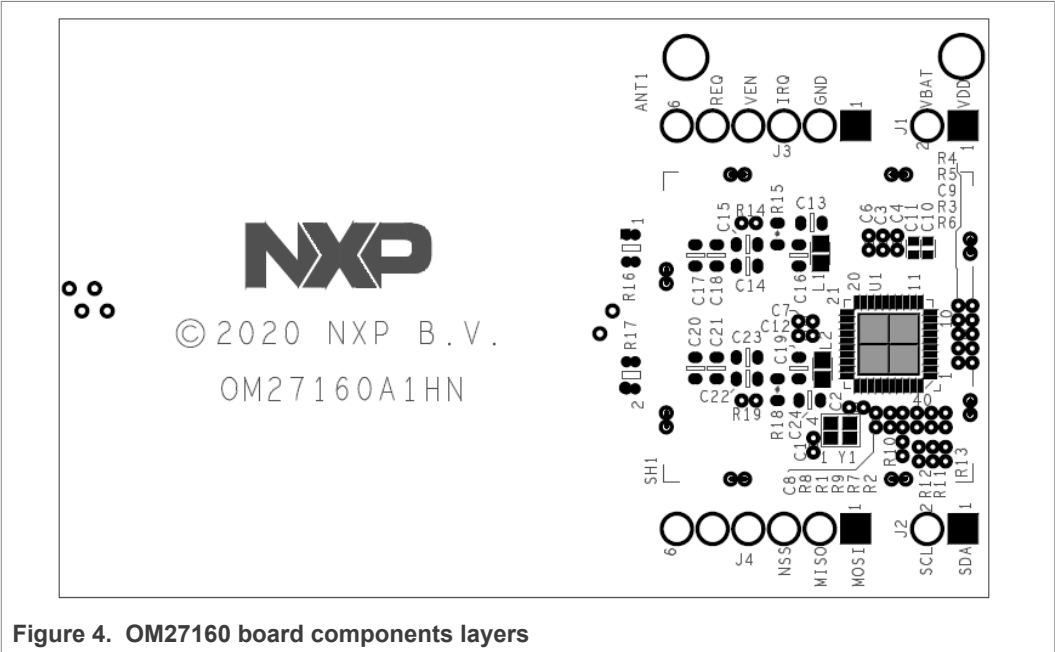


Figure 4. OM27160 board components layers

4.2.2 Layer 1

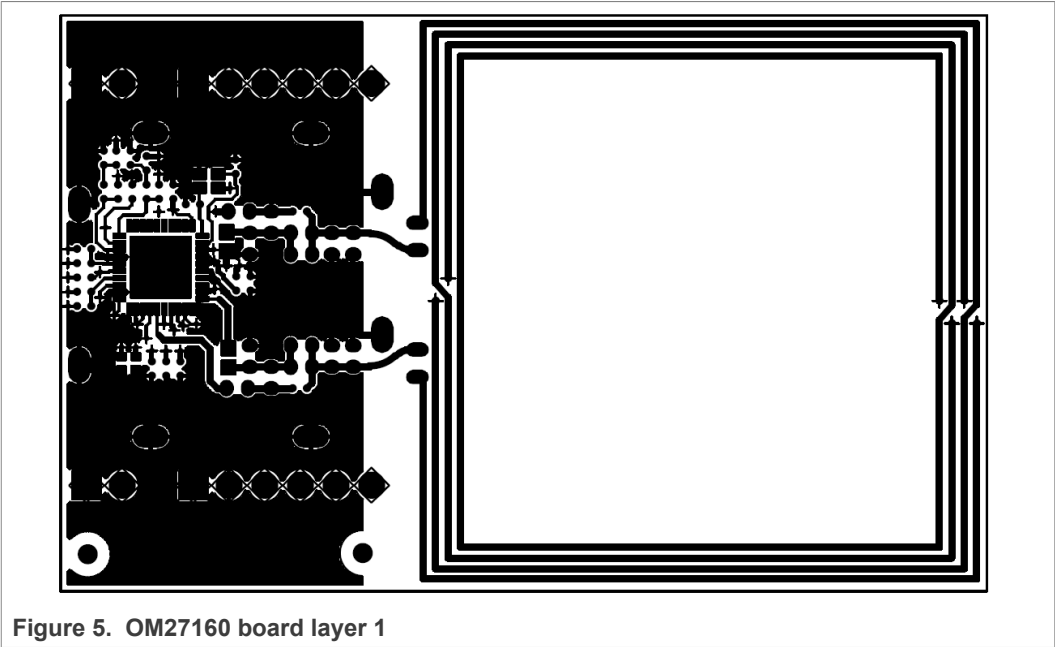


Figure 5. OM27160 board layer 1

#### 4.2.3 Layer 2

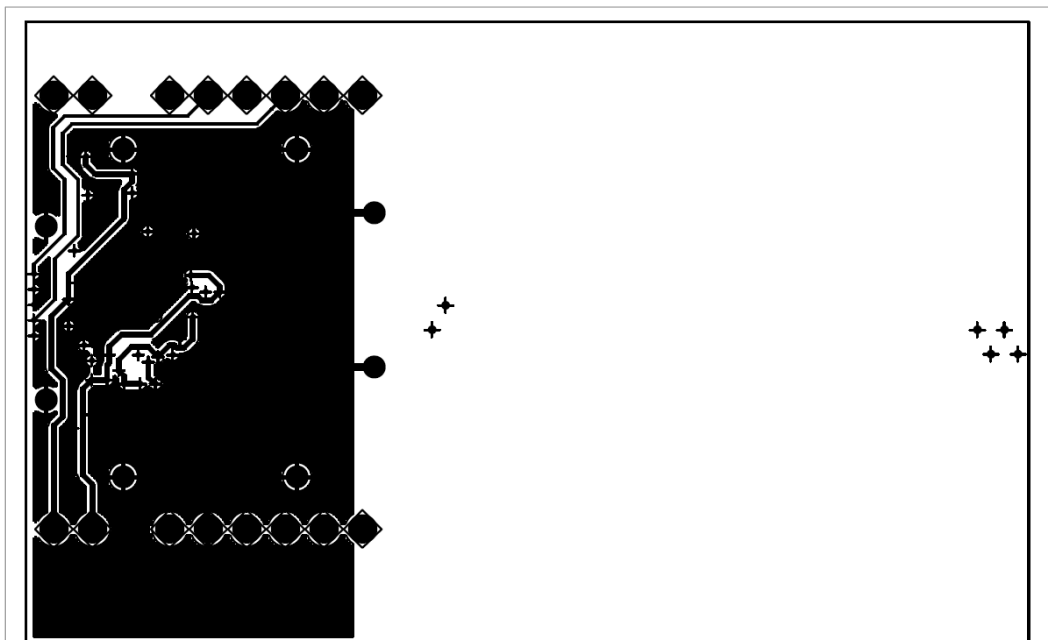


Figure 6. OM27160 board layer 2

#### 4.2.4 Layer 3

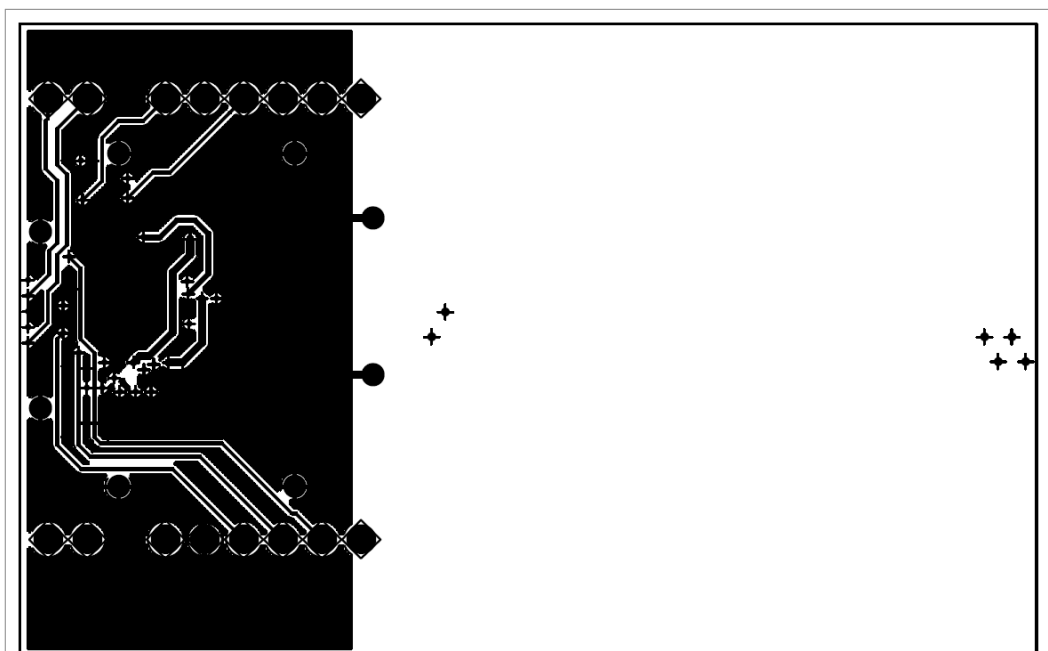


Figure 7. OM27160 board layer 3



#### 4.2.5 Layer 4

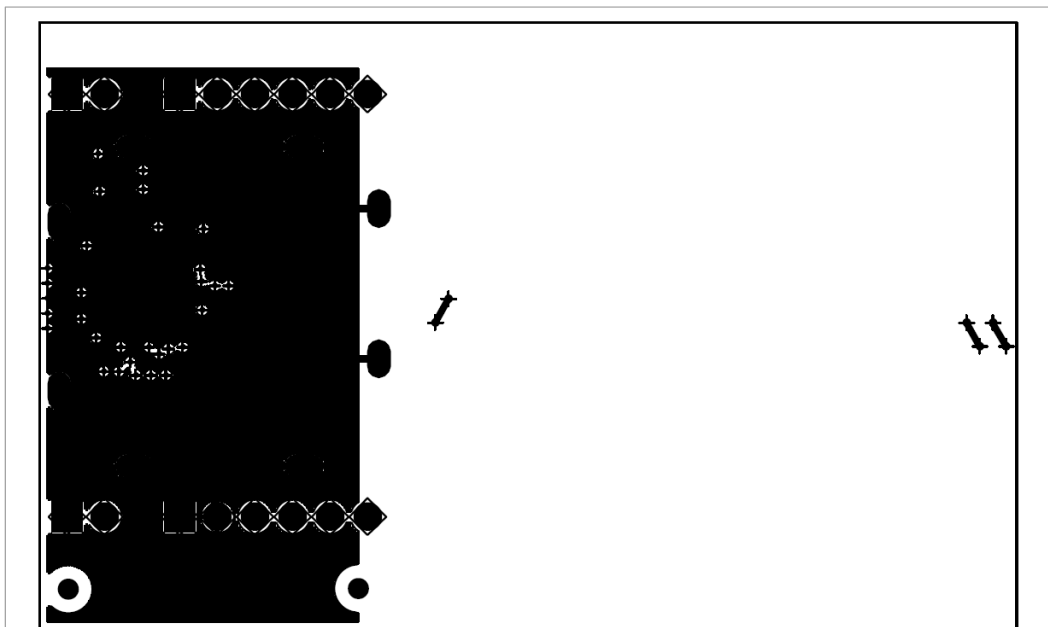


Figure 8. OM27160 board layer 4

5 Additional information

5.1 Using different I<sup>2</sup>C address

The OM27160A1HN board come with default 0x28 (7 bits) I<sup>2</sup>C PN7160 slave address. However, it is still possible to change it (between 0x28 and 0x2B) by setting of R10, R11, R12 and R13 resistors.

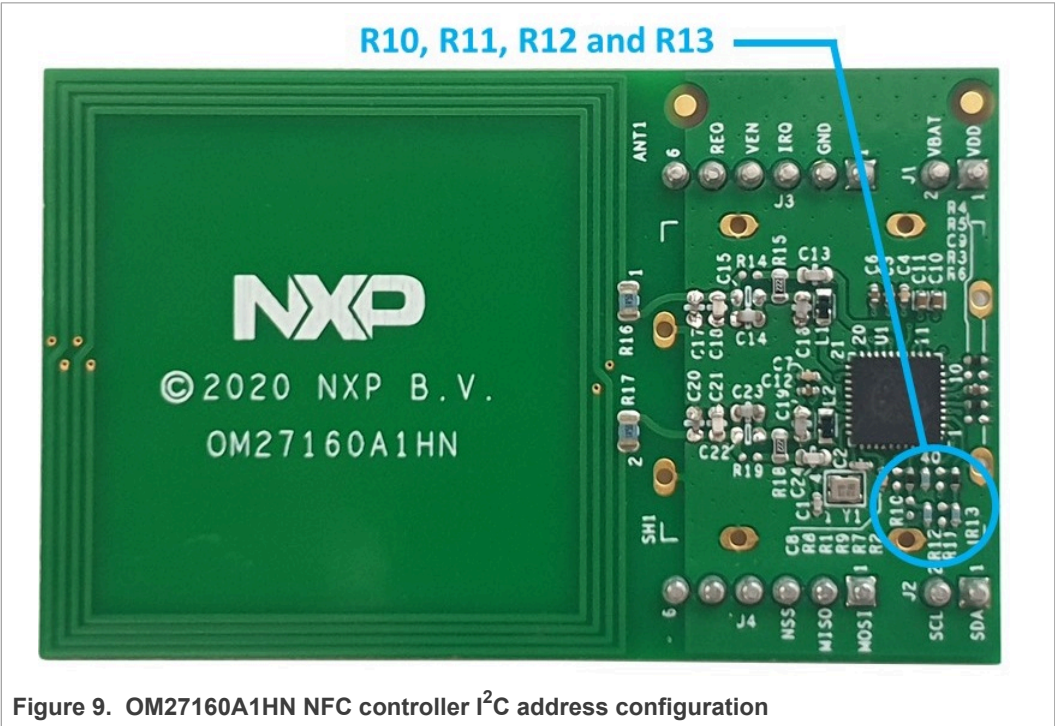


Table 1. I<sup>2</sup>C address configuration

I <sup>2</sup> C address	R10	R11	R12	R13
0x28	Open	Open	Short	Short
0x29	Short	Open	Open	Short
0x2A	Open	Short	Short	Open
0x2B	Short	Short	Open	Open

5.2 Using in another system

The OM27160 board can be reuse in another system (different from Raspberry Pi or BeagleBone, and not offering Arduino compatible interface). Indeed, the board provides all required signals on J1, J2, J3 and J4 connectors to interface any host device.

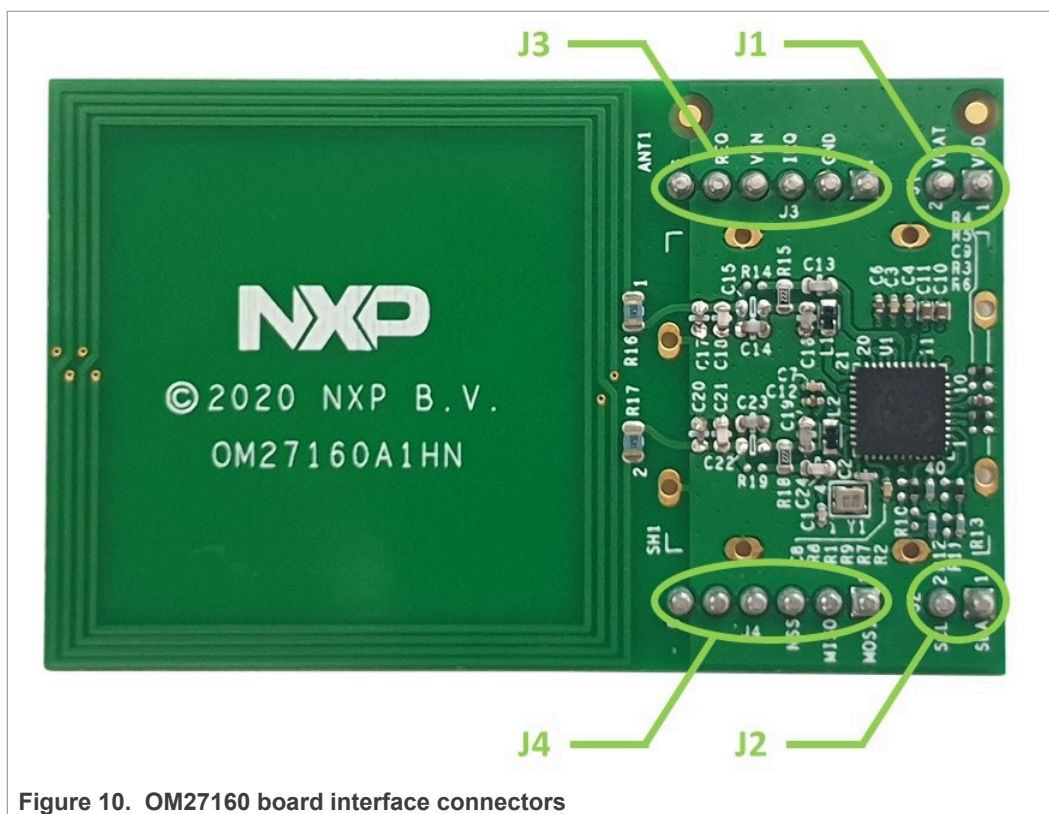


Figure 10. OM27160 board interface connectors

Table 2. OM27160 board J1 connector pinout

J1	PN7160 signal
#1	VDD(PAD): 1.8 V or 3.3 V host interface voltage reference
#2	VDD(UP/VBAT: 2.8 V to 5.5 V supply voltage

Table 3. OM27160 board J2 connector pinout (only relevant for OM27160A1HN version)

J2	PN7160 signal
#1	I2C_SDA: I2C-bus serial data
#2	I2C_SCL: I2C-bus serial clock input

Table 4. OM27160 board J3 connector pinout

J3	PN7160 signal
#1	Not connected
#2	GND: ground
#3	IRQ: interrupt request output
#4	VEN: reset pin
#5	DWL_REQ: download request pin

Table 4. OM27160 board J3 connector pinout...continued

J3	PN7160 signal
#6	Not connected

Table 5. OM27160 board J4 connector pinout (only relevant for OM27160B1HN version)

J4	PN7160 signal
#1	SPI_MOSI: SPI-bus Master Output, Slave Input data
#2	SPI_MISO: SPI-bus Master Input, Slave Output data
#3	SPI_NSS: SPI-bus Slave Select
#4	SPI_SCK: SPI-bus Serial Clock
#5	Not connected
#6	Not connected

## 6 References

---

- [1] The OM29110 Interface boards are used to connect NFC's demo boards (e.g. OM5579 related to PN7150 NFC controller or OM27160 related to PN7160 NFC controller) to Single-Board-Computer (like Raspberry Pi, BeagleBone, or board featuring Arduino header).  
More details in the related UM10956 - OM29110 NFC's SBC interface boards user manual: <https://www.nxp.com/doc/UM10956>

## 7 Legal information

### 7.1 Definitions

**Draft** — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

### 7.2 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors. In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial

sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Evaluation products** — This product is provided on an "as is" and "with all faults" basis for evaluation purposes only. NXP Semiconductors, its affiliates and their suppliers expressly disclaim all warranties, whether express, implied or statutory, including but not limited to the implied warranties of non-infringement, merchantability and fitness for a particular purpose. The entire risk as to the quality, or arising out of the use or performance, of this product remains with customer. In no event shall NXP Semiconductors, its affiliates or their suppliers be liable to customer for any special, indirect, consequential, punitive or incidental damages (including without limitation damages for loss of business, business interruption, loss of use, loss of data or information, and the like) arising out of the use of or inability to use the product, whether or not based on tort (including negligence), strict liability, breach of contract, breach of warranty or any other theory, even if advised of the possibility of such damages. Notwithstanding any damages that customer might incur for any reason whatsoever (including without limitation, all damages referenced above and all direct or general damages), the entire liability of NXP Semiconductors, its affiliates and their suppliers and customer's exclusive remedy for all of the foregoing shall be limited to actual damages incurred by customer based on reasonable reliance up to the greater of the amount actually paid by customer for the product or five dollars (US\$5.00). The foregoing limitations, exclusions and disclaimers shall apply to the maximum extent permitted by applicable law, even if any remedy fails of its essential purpose.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Security** — Customer understands that all NXP products may be subject to unidentified or documented vulnerabilities. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately. Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP. NXP has a Product Security Incident Response Team (PSIRT) (reachable at [PSIRT@nxp.com](mailto:PSIRT@nxp.com)) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

### 7.3 Licenses

#### Purchase of NXP ICs with NFC technology

Purchase of an NXP Semiconductors IC that complies with one of the Near Field Communication (NFC) standards ISO/IEC 18092 and ISO/IEC 21481 does not convey an implied license under any patent right infringed by implementation of any of those standards. Purchase of NXP Semiconductors IC does not include a license to any NXP patent (or other IP right) covering combinations of those products with other products, whether hardware or software.

## 7.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

**I<sup>2</sup>C-bus** — logo is a trademark of NXP B.V.

**NXP** — wordmark and logo are trademarks of NXP B.V.

**AMBA, Arm, Arm7, Arm7TDMI, Arm9, Arm11, Artisan, big.LITTLE, Cordio, CoreLink, CoreSight, Cortex, DesignStart, DynamIQ, Jazelle, Keil, Mali, Mbed, Mbed Enabled, NEON, POP, RealView, SecurCore, Socrates, Thumb, TrustZone, ULINK, ULINK2, ULINK-ME, ULINK-PLUS, ULINKpro,  $\mu$ Vision, Versatile** — are trademarks or registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved.

**FeliCa** — is a trademark of Sony Corporation.

Tables

Tab. 1.	I2C address configuration .....	10	Tab. 4.	OM27160 board J3 connector pinout .....	11
Tab. 2.	OM27160 board J1 connector pinout .....	11	Tab. 5.	OM27160 board J4 connector pinout (only	
Tab. 3.	OM27160 board J2 connector pinout (only			relevant for OM27160B1HN version) .....	12
	relevant for OM27160A1HN version) .....	11			



Figures

Fig. 1.	OM27160 board overview .....	4	Fig. 7.	OM27160 board layer 3 .....	8
Fig. 2.	OM27160A1HN board schematics .....	5	Fig. 8.	OM27160 board layer 4 .....	9
Fig. 3.	OM27160B1HN board schematics .....	6	Fig. 9.	OM27160A1HN NFC controller I2C address configuration .....	10
Fig. 4.	OM27160 board components layers .....	7	Fig. 10.	OM27160 board interface connectors .....	11
Fig. 5.	OM27160 board layer 1 .....	7			
Fig. 6.	OM27160 board layer 2 .....	8			

## Contents

---

<b>1</b>	<b>Revision history .....</b>	<b>2</b>
<b>2</b>	<b>Introduction .....</b>	<b>3</b>
<b>3</b>	<b>OM27160 board overview .....</b>	<b>4</b>
<b>4</b>	<b>OM27160 board details .....</b>	<b>5</b>
4.1	Schematics .....	5
4.2	Layout .....	7
4.2.1	Components layers .....	7
4.2.2	Layer 1 .....	7
4.2.3	Layer 2 .....	8
4.2.4	Layer 3 .....	8
4.2.5	Layer 4 .....	9
<b>5</b>	<b>Additional information .....</b>	<b>10</b>
5.1	Using different I2C address .....	10
5.2	Using in another system .....	10
<b>6</b>	<b>References .....</b>	<b>13</b>
<b>7</b>	<b>Legal information .....</b>	<b>14</b>

---

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

---

© NXP B.V. 2021.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 13 September 2021  
Document identifier: UM11496