
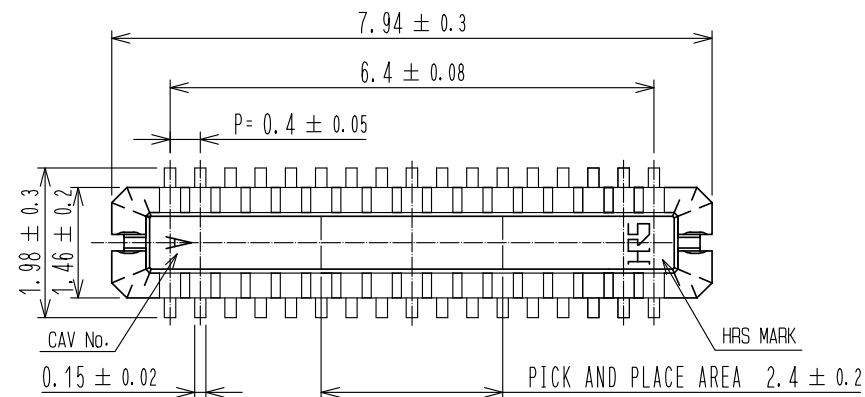



0.08 ± 0.02


- NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 1000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 mm AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF REEL, 160 mm AT MIN SHALL BE EMPTY.
4. PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05 μm MIN.
SMT LEAD : GOLD 0.05 μm MIN.
UNDERPLATING : NICKEL 1 μm MIN.
(SURFACE : SEALING)
5. REFER TO JIS C 0806, IEC 60286-3(PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)

A-A(FREE SIZE)

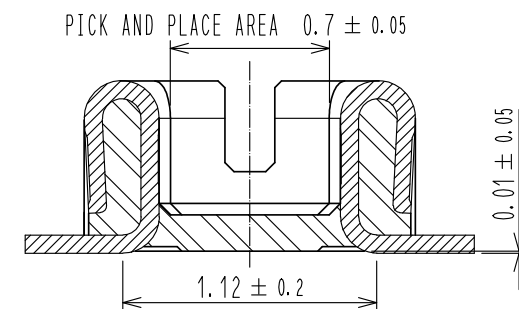


ENGAGEMENT FIGURE(FREE SIZE)

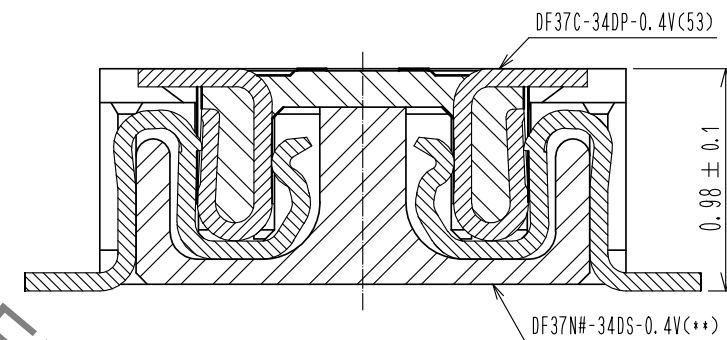


3	PS	CLEAR (EMBOSSED CARRIER TAPE)		6	PS	CLEAR (REINFORCEMENT COLLAR)				
2	PHOSPHOR BRONZE	4		5	PS	BLACK (PLASTIC REEL)				
1	LCP	BLACK, UL94V-0		4	POLYESTER	CLEAR (COVER TAPE)				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE FREE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : WR. FUKUCHI		20200609		DRAWING NO.		EDC-325523-53-00		
		CHECED : TS. MIYAZAKI		20200609		PART NO.		DF37C-34DP-0.4V(53)		
		DESIGNED : KT. KUSAKA		20200609		CODE NO.		CL684-3085-2-53		
		DRAWN : YK. MITSUISHI		20200608						
										1/3

Dec.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


◆ RECOMMENDED PATTERN

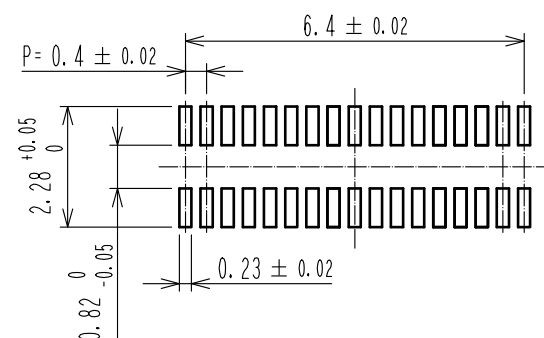


◆ RECOMMENDED METAL MASK OPENING PATTERN
RECOMMENDED SOLDER PASTE THICKNESS : $120 \mu\text{m}$

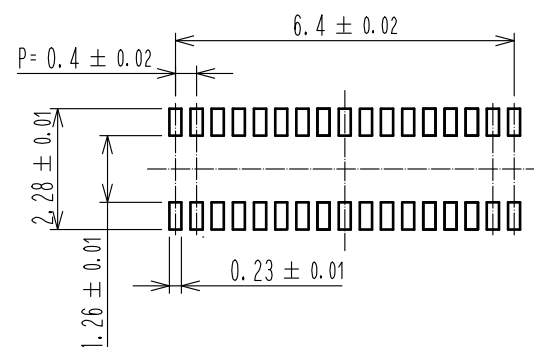

◆ RECOMMENDED METAL MASK OPENING PATTERN
RECOMMENDED SOLDER PASTE THICKNESS : $100 \mu\text{m}$

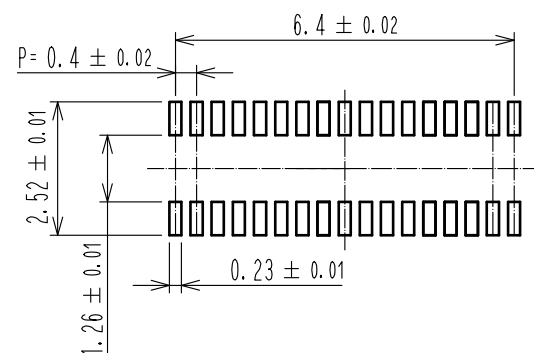

6 RECOMMENDED REFLOW TEMPERATURE PROFILE USING LEAD-FREE SOLDER PASTE.

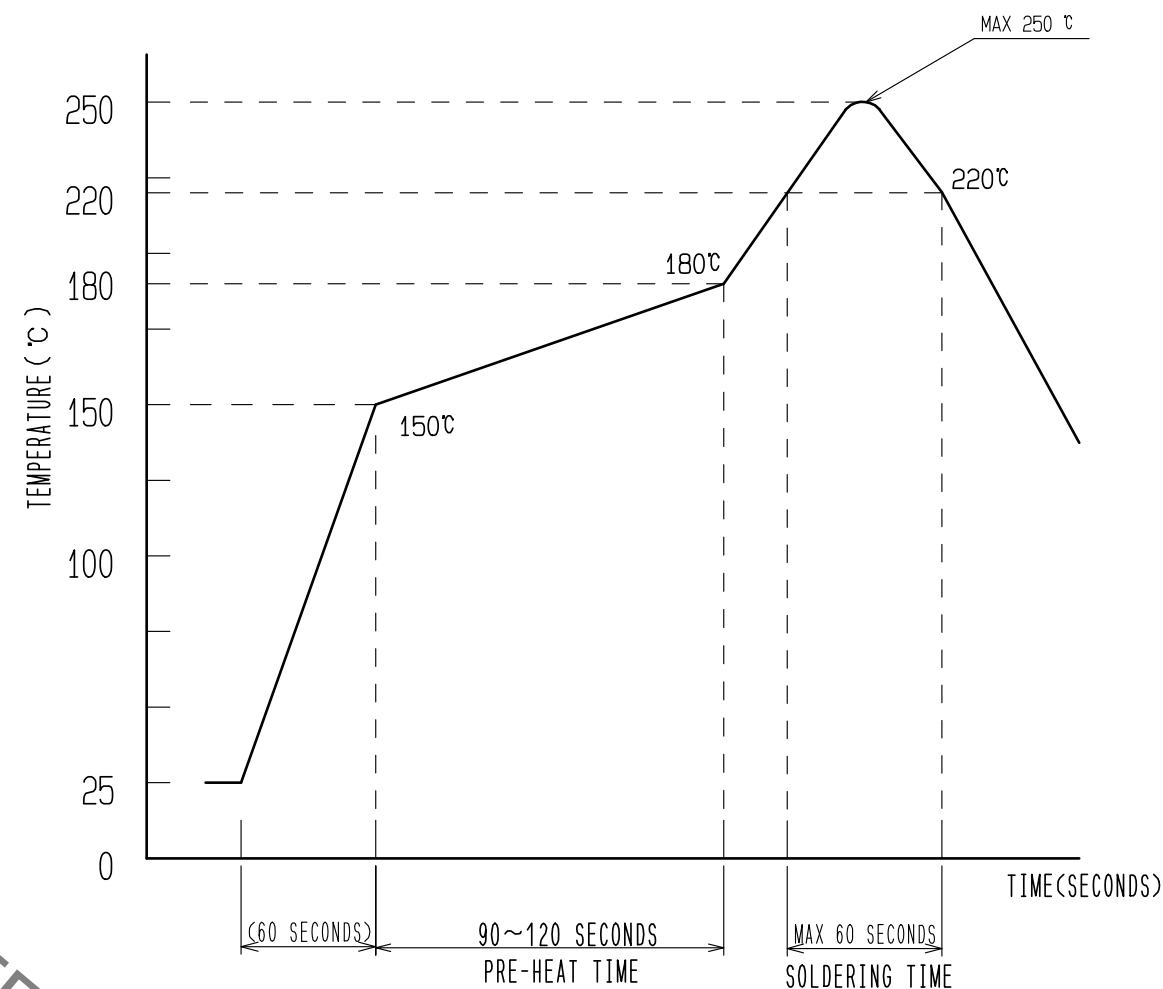

1) REFLOW TIME
REFLOW METHOD: IR REFLOW
NUMBER OF REFLOW CYCLES: 2 CYCLES MAX.
DURATION ABOVE 220 °C, 60 SEC. MAX.
(PEAK TEMPERATURE: 250°C MAX.)

2) PRE-HEAT TIME
PRE-HEAT TEMPERATURE(MIN) : 150 °C
PRE-HEAT TEMPERATURE(MAX) : 180 °C
PRE-HEAT TIME : 90~120 sec.


NOTE 6 THIS TEMPERATURE PROFILE IS PER THE CONDITIONS SHOWN ABOVE.
ADDITIONAL FACTORS, SUCH AS SOLDER PASTE TYPE, PCB SIZE AND
OTHER MOUNTED COMPONENTS COULD AFFECT THE PROFILE, THEREFORE,
A THOROUGH EVALUATION OF MOUNTING CONDITION IS REQUIRED
PRIOR TO PRODUCTION. TEMPERATURE IS MEASURED AT CONTACT LEAD.

HRS

DRAWING NO.	EDC-325523-53-00
PART NO.	DF37C-34DP-0.4V(53)
CODE NO.	CL684-3085-2-53

2/3

Dec.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

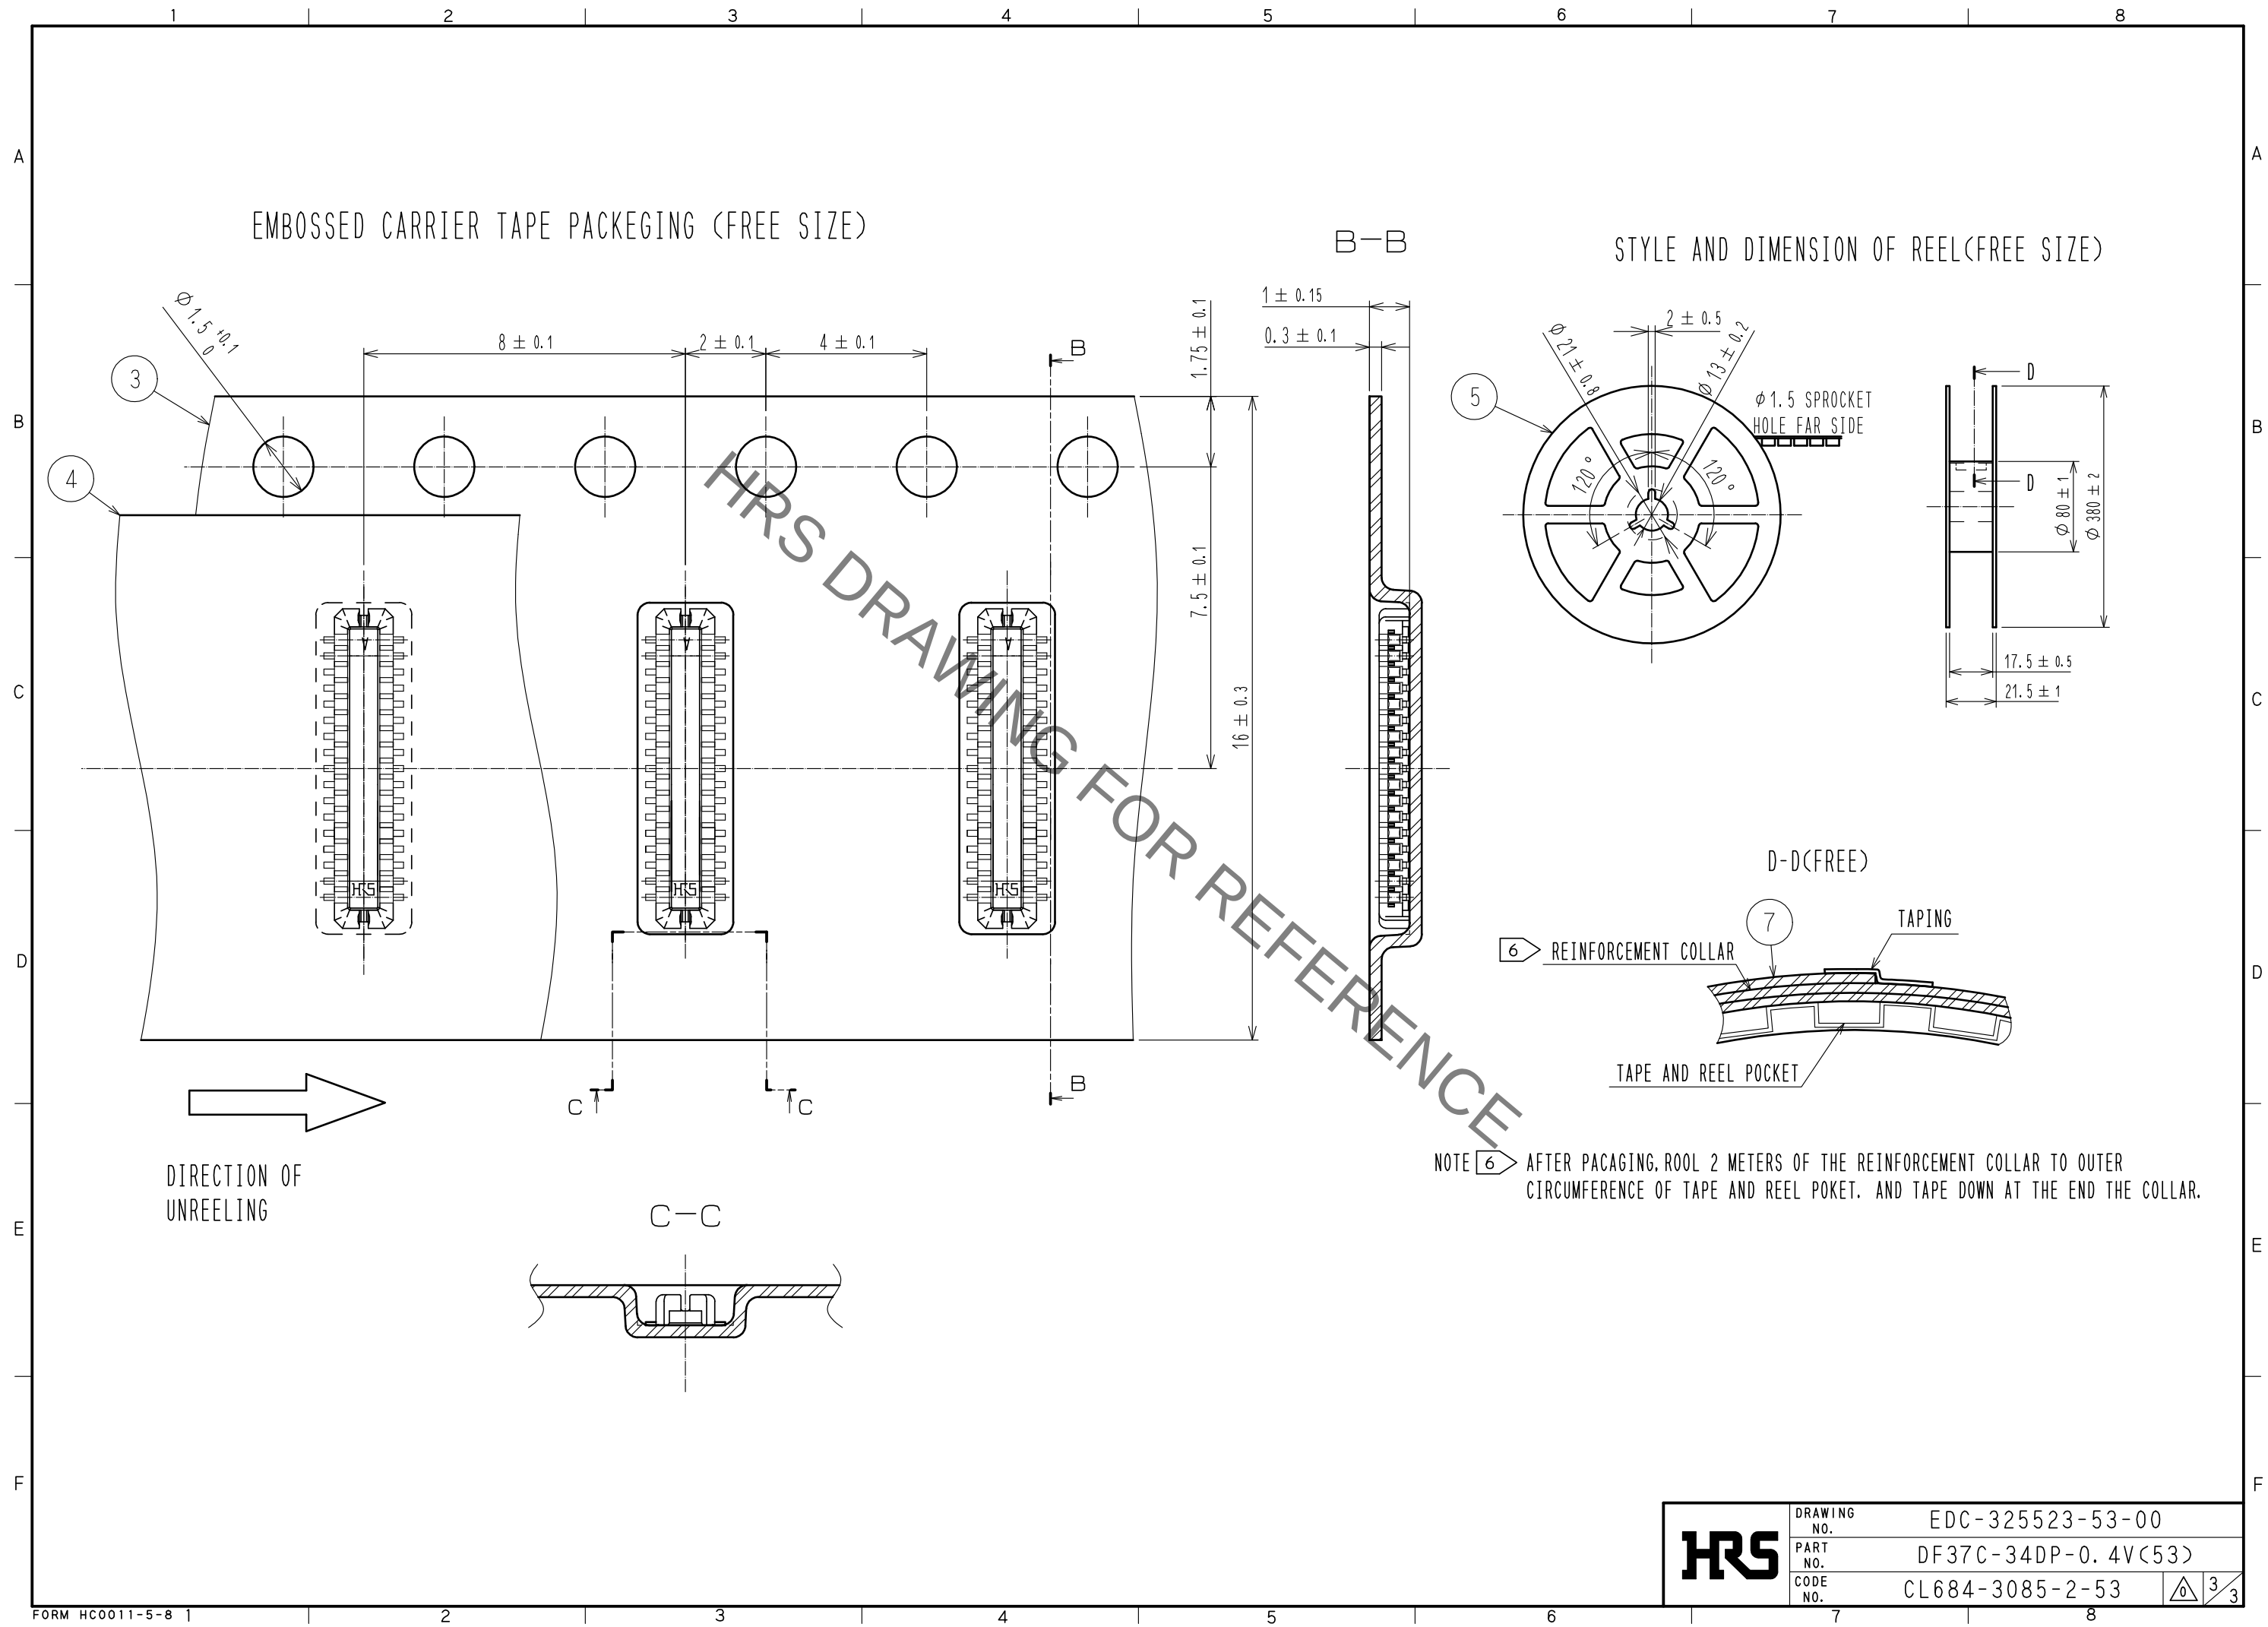

HRS	DRAWING NO.	EDC-325523-53-00
	PART NO.	DF37C-34DP-0.4V(53)
	CODE NO.	CL684-3085-2-53

3

3