




CODE 78 - HEAT SHRINK BOOT BACKSHELL

225M318-19C-D

SERIES _____
 ORDER NUMBER (TABLE 1) _____
 MATERIAL _____
 REFER TO CH00-0250-004
 FINISH _____
 REFER TO CH00-0250-004
 MODIFICATION CODE _____
 REFER TO CH00-0250-004 (2)

NOTES:

1. THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- (2) FOR ADDITIONAL DIMENSIONS, ORDERING INFORMATION AND MODIFICATIONS, SEE CH00-0250-004.
3. ADAPTOR TO BE PERMANENTLY MARKED/BAGGED AND LABELLED WITH CODE IDENTIFICATION NUMBER AND PART NUMBER. (e.g. 06090-225M312-19B).
- (4) KNURL INSIDE BOOT GROOVE MAY BE SUPPLIED AT MANUFACTURER'S OPTION.
5. ADAPTOR MATES TO BS9522 F0032 (PATT121B) CONNECTORS; ONLY MANUFACTURED BY AB CONNECTORS LTD. SEALING IS ONLY ACHIEVED WHEN USING GROMMETS ABB-*-*-*GAC-***, SUPPLIED BY AB CONNECTORS

If this document is printed it becomes uncontrolled. Check for the latest revision

DRAWN	K.WINCZURA	DATE 17/06/2015	 3RD ANGLE PROJECTION NOT TO SCALE	TITLE: HEAT SHRINK BOOT BACKSHELL		 Polamco 			
CHECKED		17/06/2015							
APPROVED	K.SHEPPARD	22/06/2015		ASSY USED ON: BS9522 F0032 (PATT 121B) CONNECTORS					
APPROVED	H.SMITH	24/06/2015							
REVISIONS			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0.25MM ANGULAR +/- 1°						
LTR	DESCRIPTION	DATE		APPROVED					
G	REVISED PER ECN AD94013	04/08/1993		J.KUSTER					
H	REVISED PER ECO-15-009389	24/06/2015		H.SMITH					
TE CAGE CODE: 06090 POLAMCO/TE CAGE CODE: U5792				TE CONNECTIVITY - POLAMCO LTD RESERVES THE RIGHT TO AMEND THIS DRAWING AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.		DRAWING NO: 225M3XX	DRAWING REV: H	SHT 1	

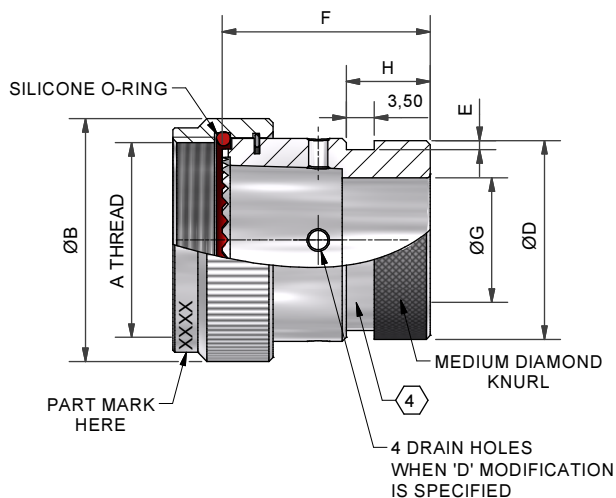



TABLE 1

BASE PART NUMBER	SHELL SIZE	A THREAD	ØB MAX	ØD MAX	E +0.20/-0.00	F	ØG MIN	H MAX
225M312	10SL, 12S	5/8-24UNEF	20,3	15,4	1,12	26,0	7,8	10,80
225M314	14S	3/4-20UNEF	23,7	19,2	1,12	26,0	10,8	10,80
225M316	16, 16S	7/8-20UNEF	26,7	20,9	1,12	26,0	13,3	10,80
225M318	18	1-20UNEF	30,3	24,8	1,12	26,0	15,3	10,80
225M320	20	1 1/8-18UNEF	35,3	31,2	1,75	26,0	18,3	10,80
225M322	22	1 1/4-18UNEF	38,3	34,8	1,75	26,0	21,8	10,80
225M324	24	1 3/8-18UNEF	41,3	36,8	1,75	26,0	25,3	10,80
225M328	28	1 5/8-18UNEF	47,8	43,8	1,75	26,0	30,8	14,91
225M332	32	1 7/8-16UN	54,2	48,8	2,20	30,0	36,8	14,91
225M336	36	2 1/16-16UNS	62,2	57,8	2,20	30,0	40,8	14,91

If this document is printed it becomes uncontrolled. Check for the latest revision

DRAWN	K.WINCZURA	DATE 17/06/2015	 3RD ANGLE PROJECTION NOT TO SCALE	TITLE: HEAT SHRINK BOOT BACKSHELL	 Polamco	
CHECKED		17/06/2015				
APPROVED	K.SHEPPARD	22/06/2015				
APPROVED	H.SMITH	24/06/2015				
REVISIONS			UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0.25MM ANGULAR +/- 1°	ASSY USED ON: BS9522 F0032 (PATT 121B) CONNECTORS	 TE connectivity	
LTR	DESCRIPTION	DATE				APPROVED
G	REVISED PER ECN AD94013	04/08/1993				J.KUSTER
H	REVISED PER ECO-15-009389	24/06/2015				H.SMITH
TE CAGE CODE: 06090 POLAMCO/TE CAGE CODE: U5792				TE CONNECTIVITY - POLAMCO LTD RESERVES THE RIGHT TO AMEND THIS DRAWING AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.	DRAWING NO: 225M3XX	
					DRAWING REV: H	
					SHT 2	