


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

7703-8

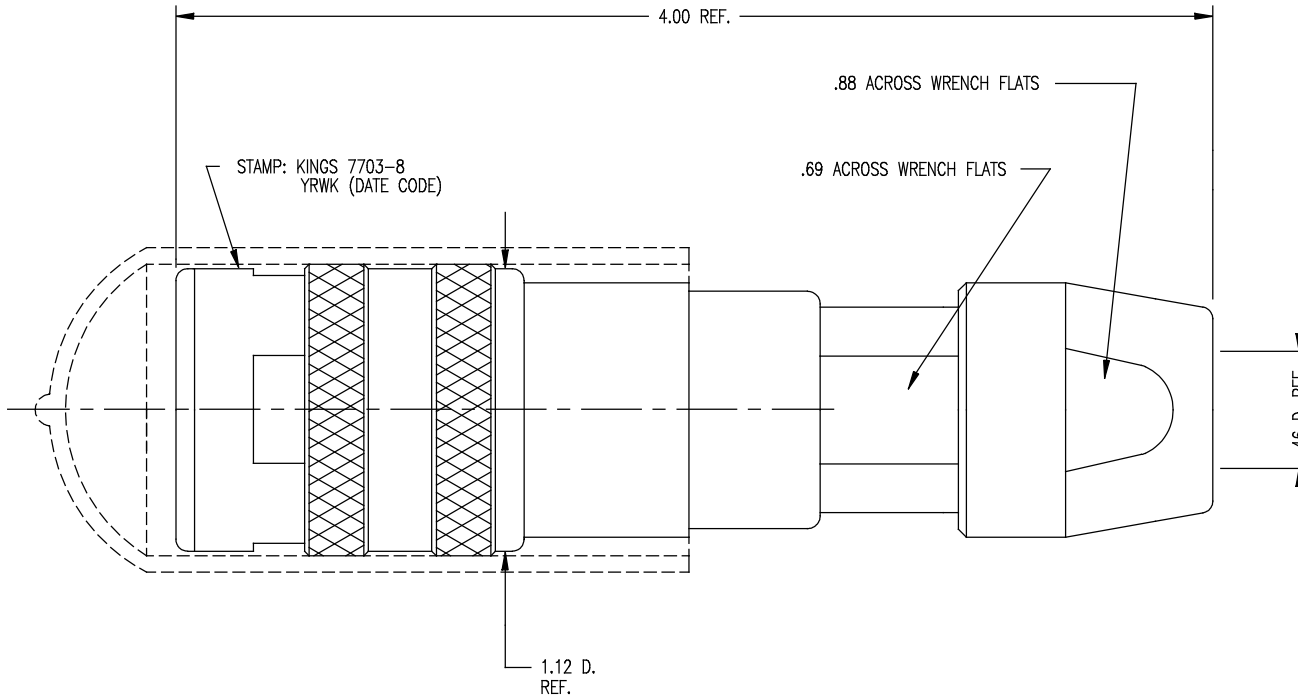

NOTES:

1. FOR USE WITH BELDEN 1859A (79 CABLE GROUP).
2. FOR CABLING INSTRUCTIONS SEE KAI-8011.
3. FOR CRIMPING USE DIE SIZE 2040.
4. MATERIALS:
INSULATORS-TEFLON, ASTM-D-4894
GASKETS-SILICONE RUBBER, ZZ-R-765
CAP-VINYL
K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
CENTER CONTACT }
OUTER CONTACT SPRING } BER. COP., ASTM-B-196
INSERT
ALL OTHER METAL PARTS-BRASS, ASTM-B16

5. FINISHES:
CENTER CONTACT }
OUTER CONTACT SPRING } GOLD PLATE PER MIL-G-45204
NUTS }
COLLET } KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
BODIES }
ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC-500 MHZ
VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
INNER GROUND/OUTER GROUND: 500 VRMS

REVISIONS

ISSUE	CHANGES
0	ER 36987 KH 05/30/96
1	CN 37012 E KH 06/18/96
2	CN 37238 D KH 02/03/97
3	CN 38154 C BDH 12/14/00

KAM6627

SCALE 2:1

APPROX SURFACE AREA

WAS: E-19362

USED ON

REF:

JK, TRI-LOC,
SERIAL DIGITAL

DRAWN	KH	DATE	05/30/96
DESIGN	DW	DATE	05/31/96
APPR.		DATE	

KINGS

ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7703-8

GSD