



DIMENSIONS

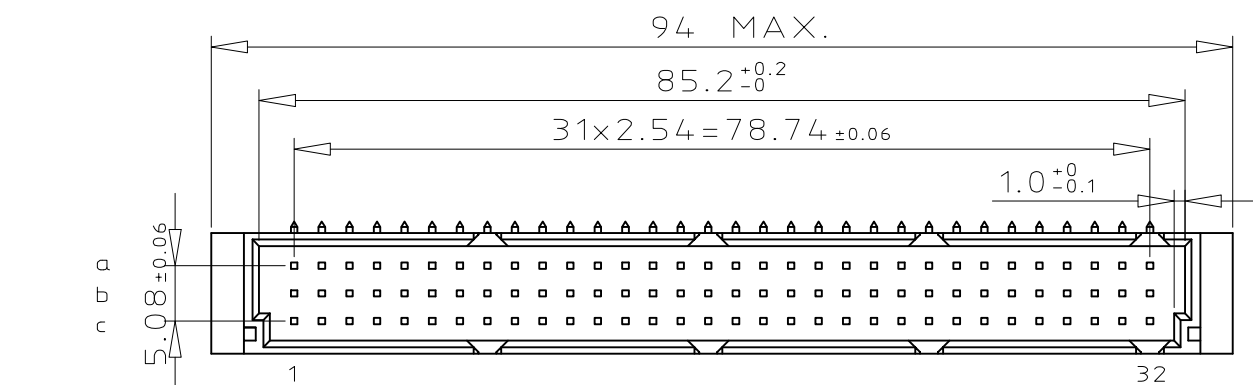

Technical drawing of the top view of a PCB assembly. The drawing shows a rectangular board with a central horizontal strip containing a series of pins. The board has mounting holes at the corners and along the edges. Dimensions and labels are provided: a vertical dimension of 10.2 ± 0.2 on the left, a horizontal dimension of 88.9 ± 0.1 at the bottom, and a circular feature labeled $\varnothing 2.5$ MIN. on the left. The central strip contains the text "8609 XXX XX XX XXX XXXX YY XX". Above the board, there are labels for "P/N PRINTING" and "DATE PRINTING YY-YEAR XX-WEEK" with arrows pointing to specific locations on the board.

PCB LAYOUT

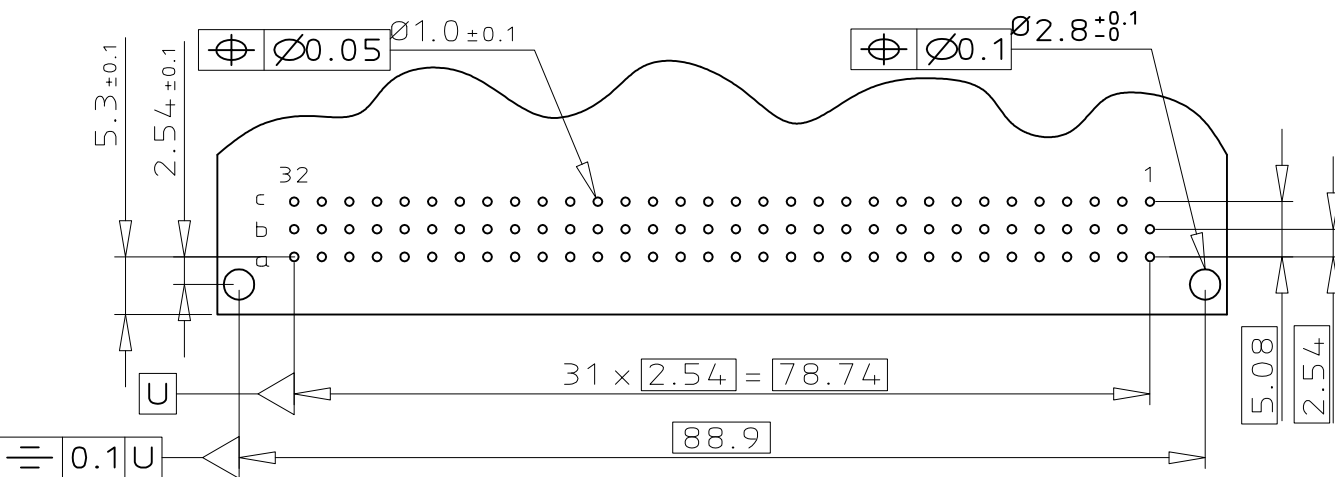

CONTACT ARRANGEMENT


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
a	⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗	
b		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗
c	⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗		⊗	

⊗ STANDARD CONTACT
□ EMPTY CAVITY
☑ FMLB CONTACT
LMEB CONTACT

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

TERMINATION

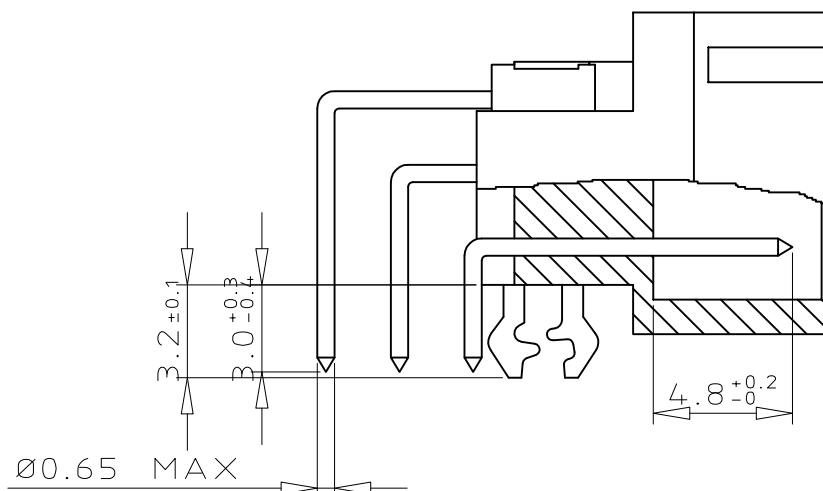

ORDERING INFORMATION

SERIES		8609	3	48	7	1	13	7	5	8	RDLF	
ROWS FITTED WITH CONTACTS		ROW a b c 3		48								
NO. OF CONTACTS												
TYPE OF INSULATOR												
3 ROW MALE INSULATOR		7										
METHOD OF MOUNTING												
STANDARD MOUNTING - STYLE C		1										
TERMINATION												
ANGLED SPILL		13										
OPTIONS												
NO OPTION		7										
WITH HARPOONS		H										
PERFORMANCE CLASS												
DIN 41612 CLASS 3										4		
DIN 41612 CLASS 2										5		
DIN 41612 CLASS 1										6		
AS PER MIL C 55302 / JSS 50808										8		
PITCH PER ROW												
5.08mm										8		
LEAD FREE VERSION : CONTACT LOADING IN ODD POSITIONS RDLF												

[illegible]