
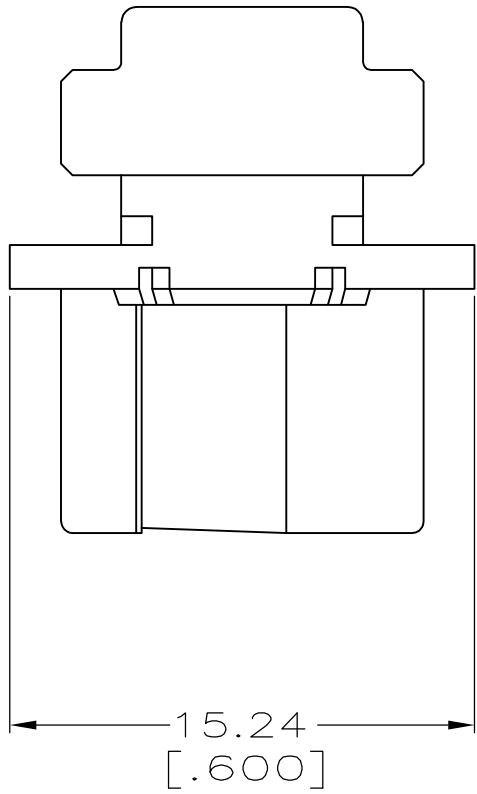


LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	REVISED PER ECO-08-007327			05SEP08	BM	WM

- 1 .THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- 2 DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 3 MATERIAL: HOUSING — POLYPHENYLENE OXIDE, BLACK.
TERMINAL — HIGH STRENGTH COPPER ALLOY PLATED WITH 0.76μm [.000030] MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76μm [.000030] MIN TOTAL ON MATING SURFACE, OVER 1.27μm [.000050μ] MIN NICKEL PLATING.
- 4 CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF AMP INCORPORATED.
- 5.WIRE SIZE: 24 & 26 AWG SOLID & 24 AWG 7 STRAND COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF 1.15[.045] IS ACCEPTABLE FOR MOST APPLICATIONS.

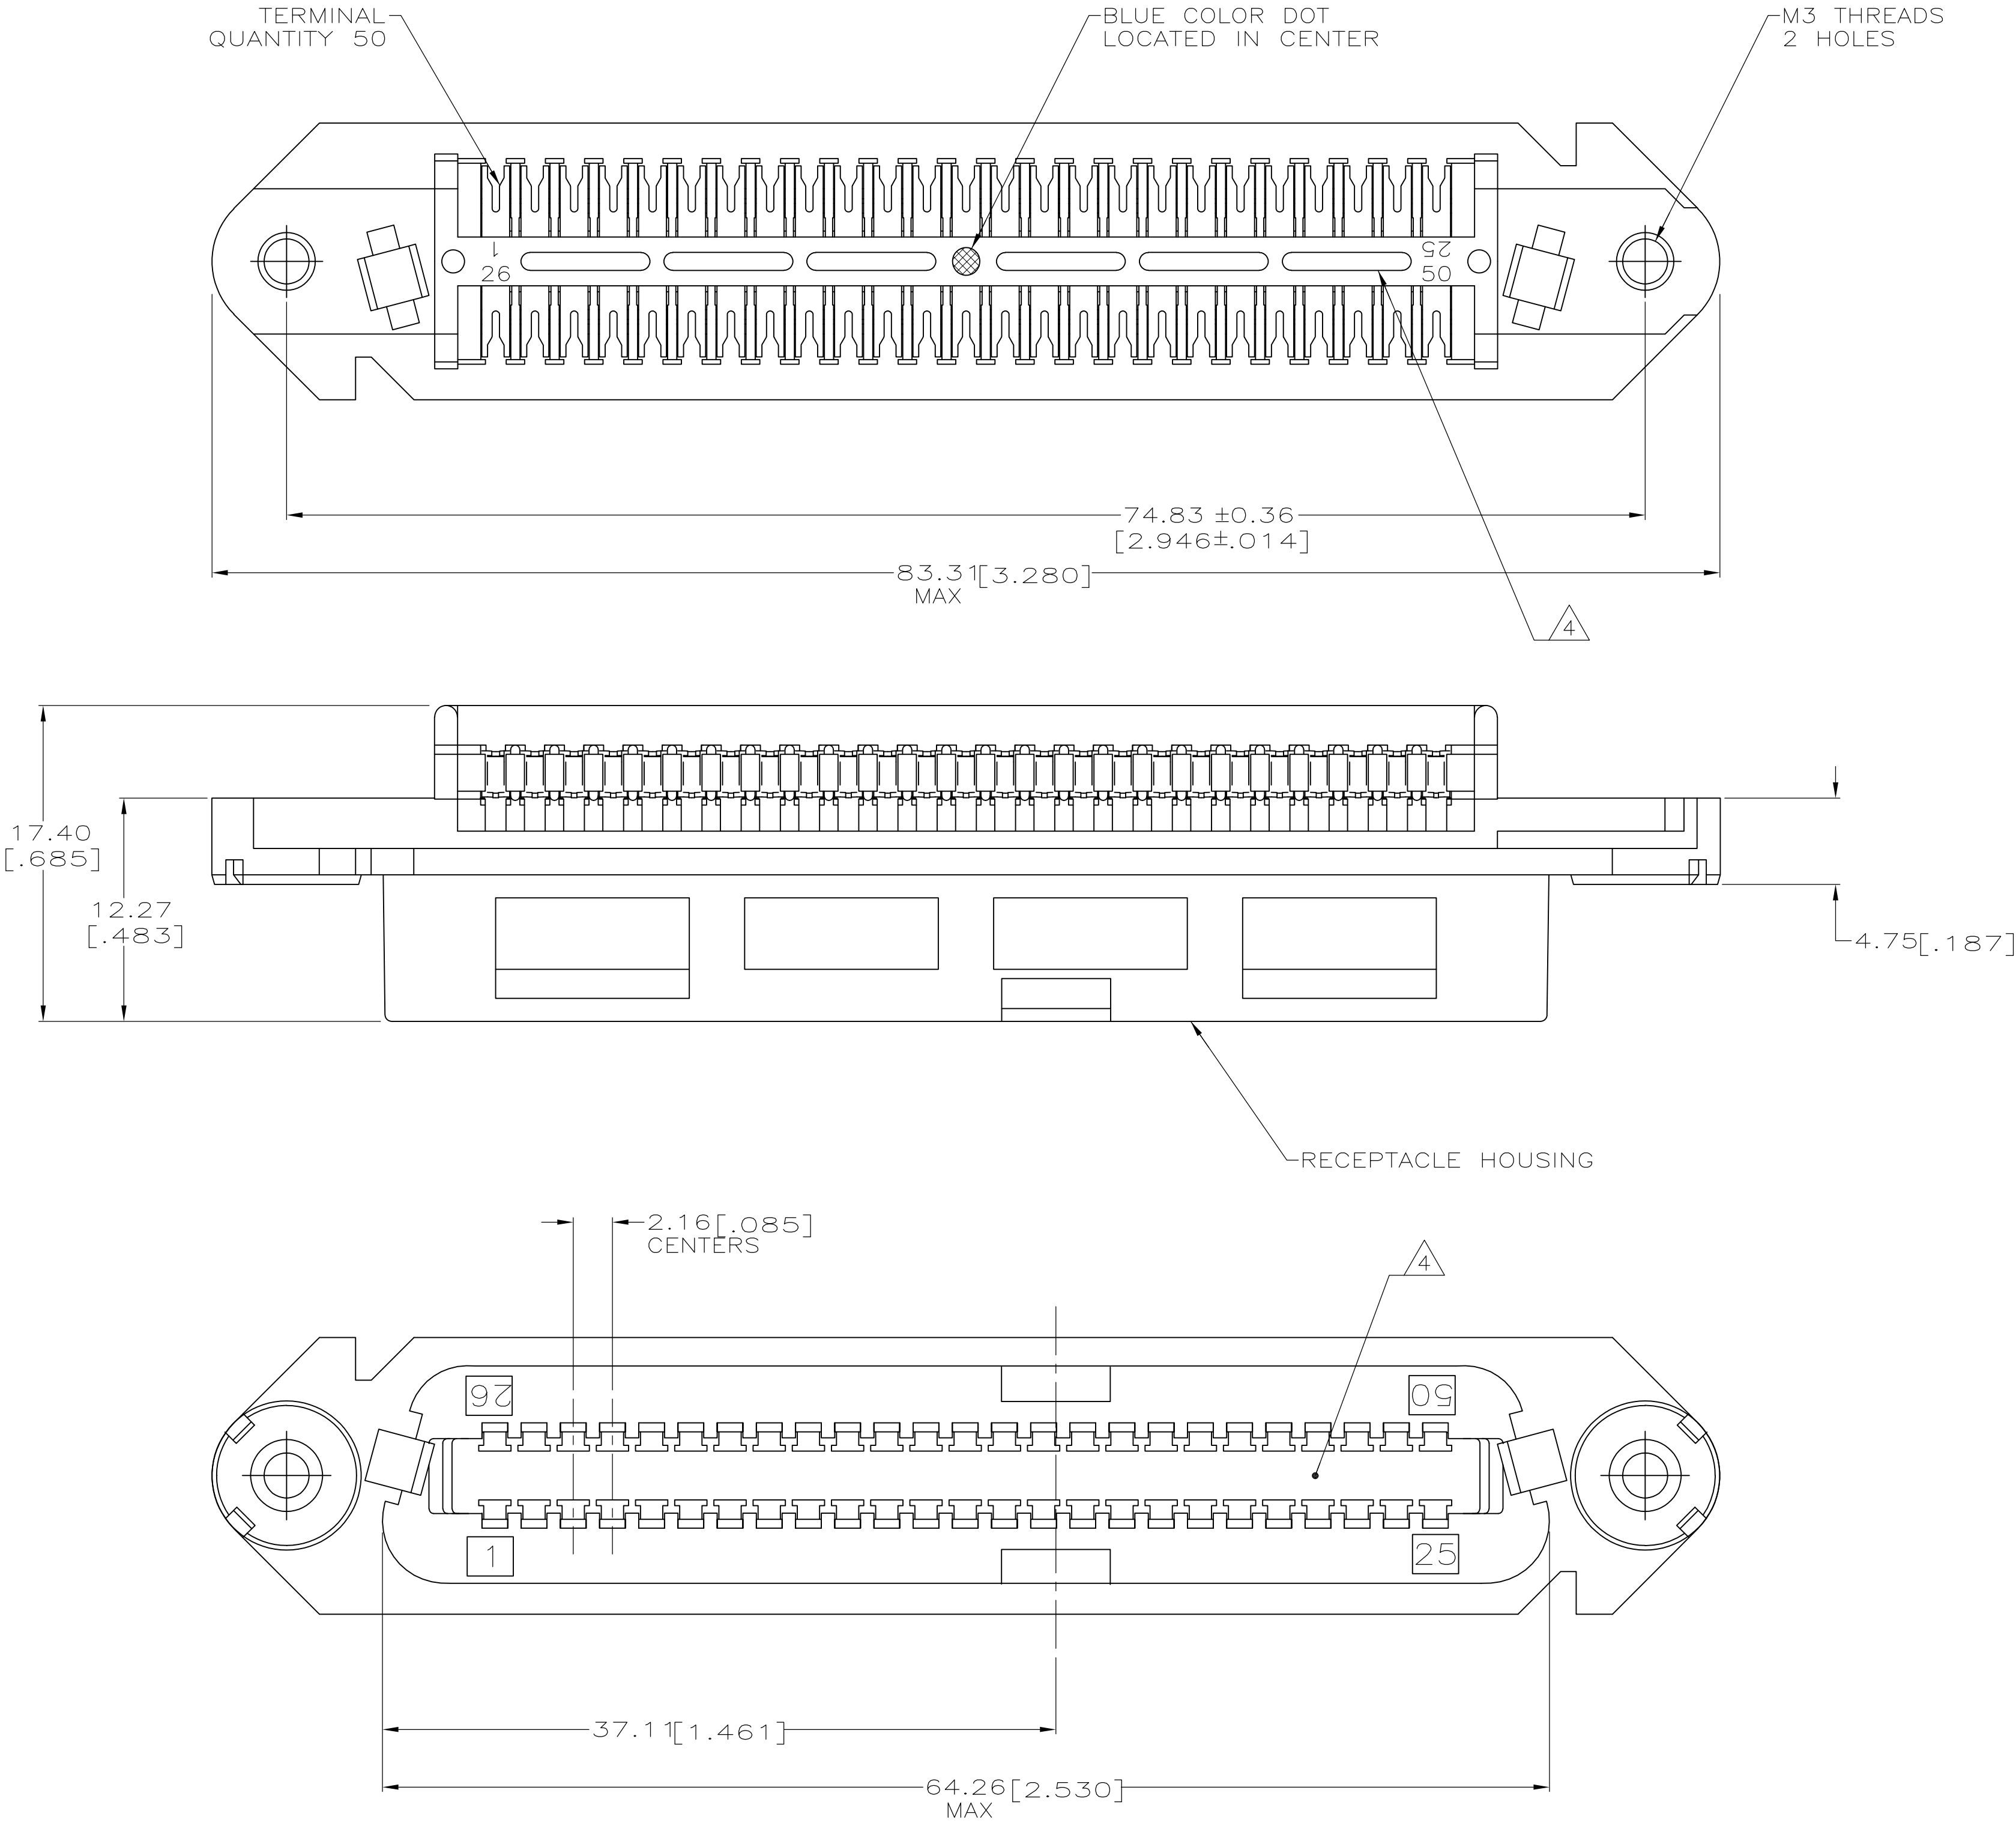

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DL DRUMMOND 19-MAR-99	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		CHK DL DRUMMOND 22-MAR-99	NAME RECEPTACLE ASSEMBLY, 50 POSITION,B-SLOT,WITH M3 THREADS	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD AM FLETCHER 22-MAR-99	PRODUCT SPEC	
			APPLICATION SPEC	
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	FINISH	SIZE CAGE CODE DRAWING NO	
			RESTRICTED TO	
MATERIAL			WEIGHT	
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1 REV C