SIGN	DATE	DESCRIPTION	APPROVER
1	3/6'07	增加溝槽尺寸規范	Marvin
2	4/7'09	Voltage,wirerange,torque,operating temperature safety approval are changed	Jody
3	4/7'09	Name changed	Jody

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

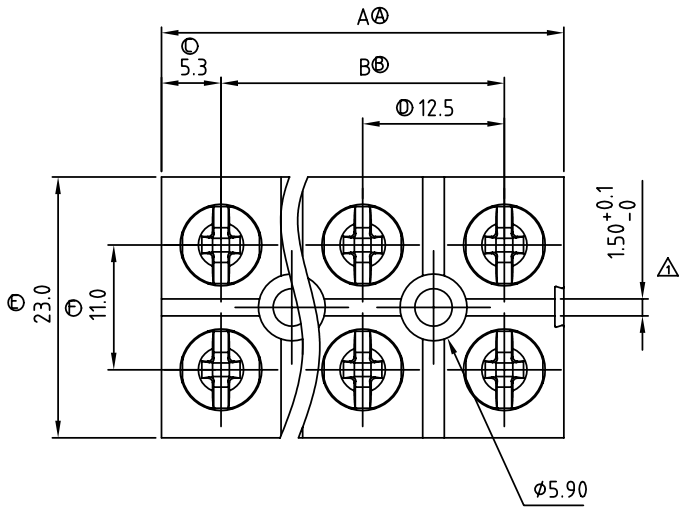

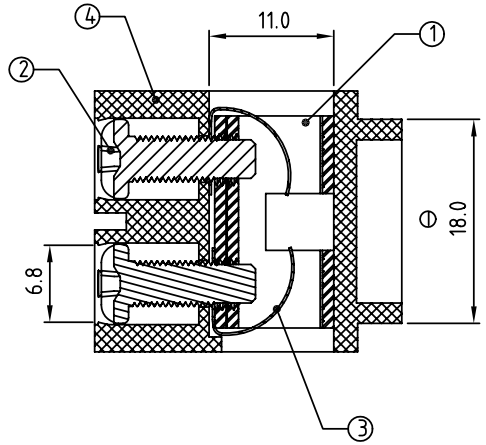

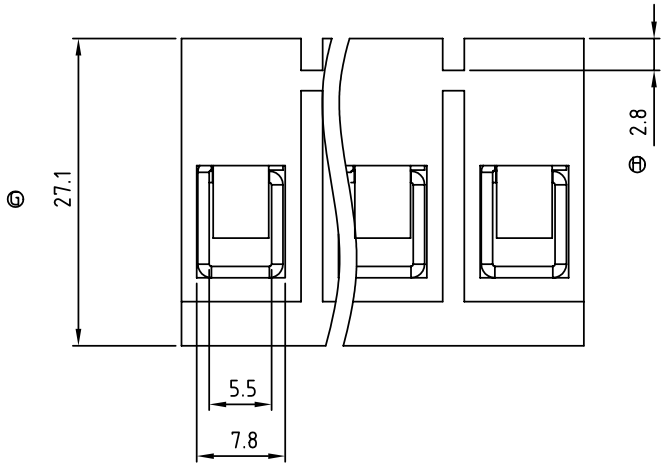

Material

- Item① Terminal body(metal housing): Steel stamped clamp
- Item② Terminal screw: Steel Zinc plating "+/-" slot type
- Item③ Wire guard: Stainless steel
- Item④ Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- 2 Voltage rating: 300VAC
- Current rating: 57A
- Wire range:
- 1 Solid wire(AWG): 6-22
- 1 Stranded wire(AWG): 6-22
- 2 Torque: 13 Lb-In
- Screw: M4
- Wire strip length: 8-9mm
- 1 Withstanding Voltage: 1.6KV
- 2 Operating temperature: -40°C to +115°C
- 2 Safety Approval: c UL us

POLES	DIM A	DIM B	TOL
2P	23.0	12.5	+0.40 -0.40
3P	35.5	25.0	
4P	48.0	37.5	
5P	60.5	50.0	
6P	73.0	62.5	

A=(N-1)×12.5+10.5
B=(N-1)×12.5
N=NUMBER OF POLES

EN xx 04 x 0 xxxx G

02	2 Poles	0	Black	000 0	@ logo
03	3 Poles	4	Yellow	000 A	ANY logo
...	...	5	Green	Any special item by customer request, please contact sales department.	G: Pb<40,000ppm
06	6 Poles	8	Grey		

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	EN-12.5 Series (2~6P) 3				
PART NO.	ENxx04x00000G			DWG NO.	8EN0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		JODY 2009.4.7	JODY 2009.4.7	UNIT: mm / SCALE: NONE / SHEET: 01/01 / REV.: D	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°