
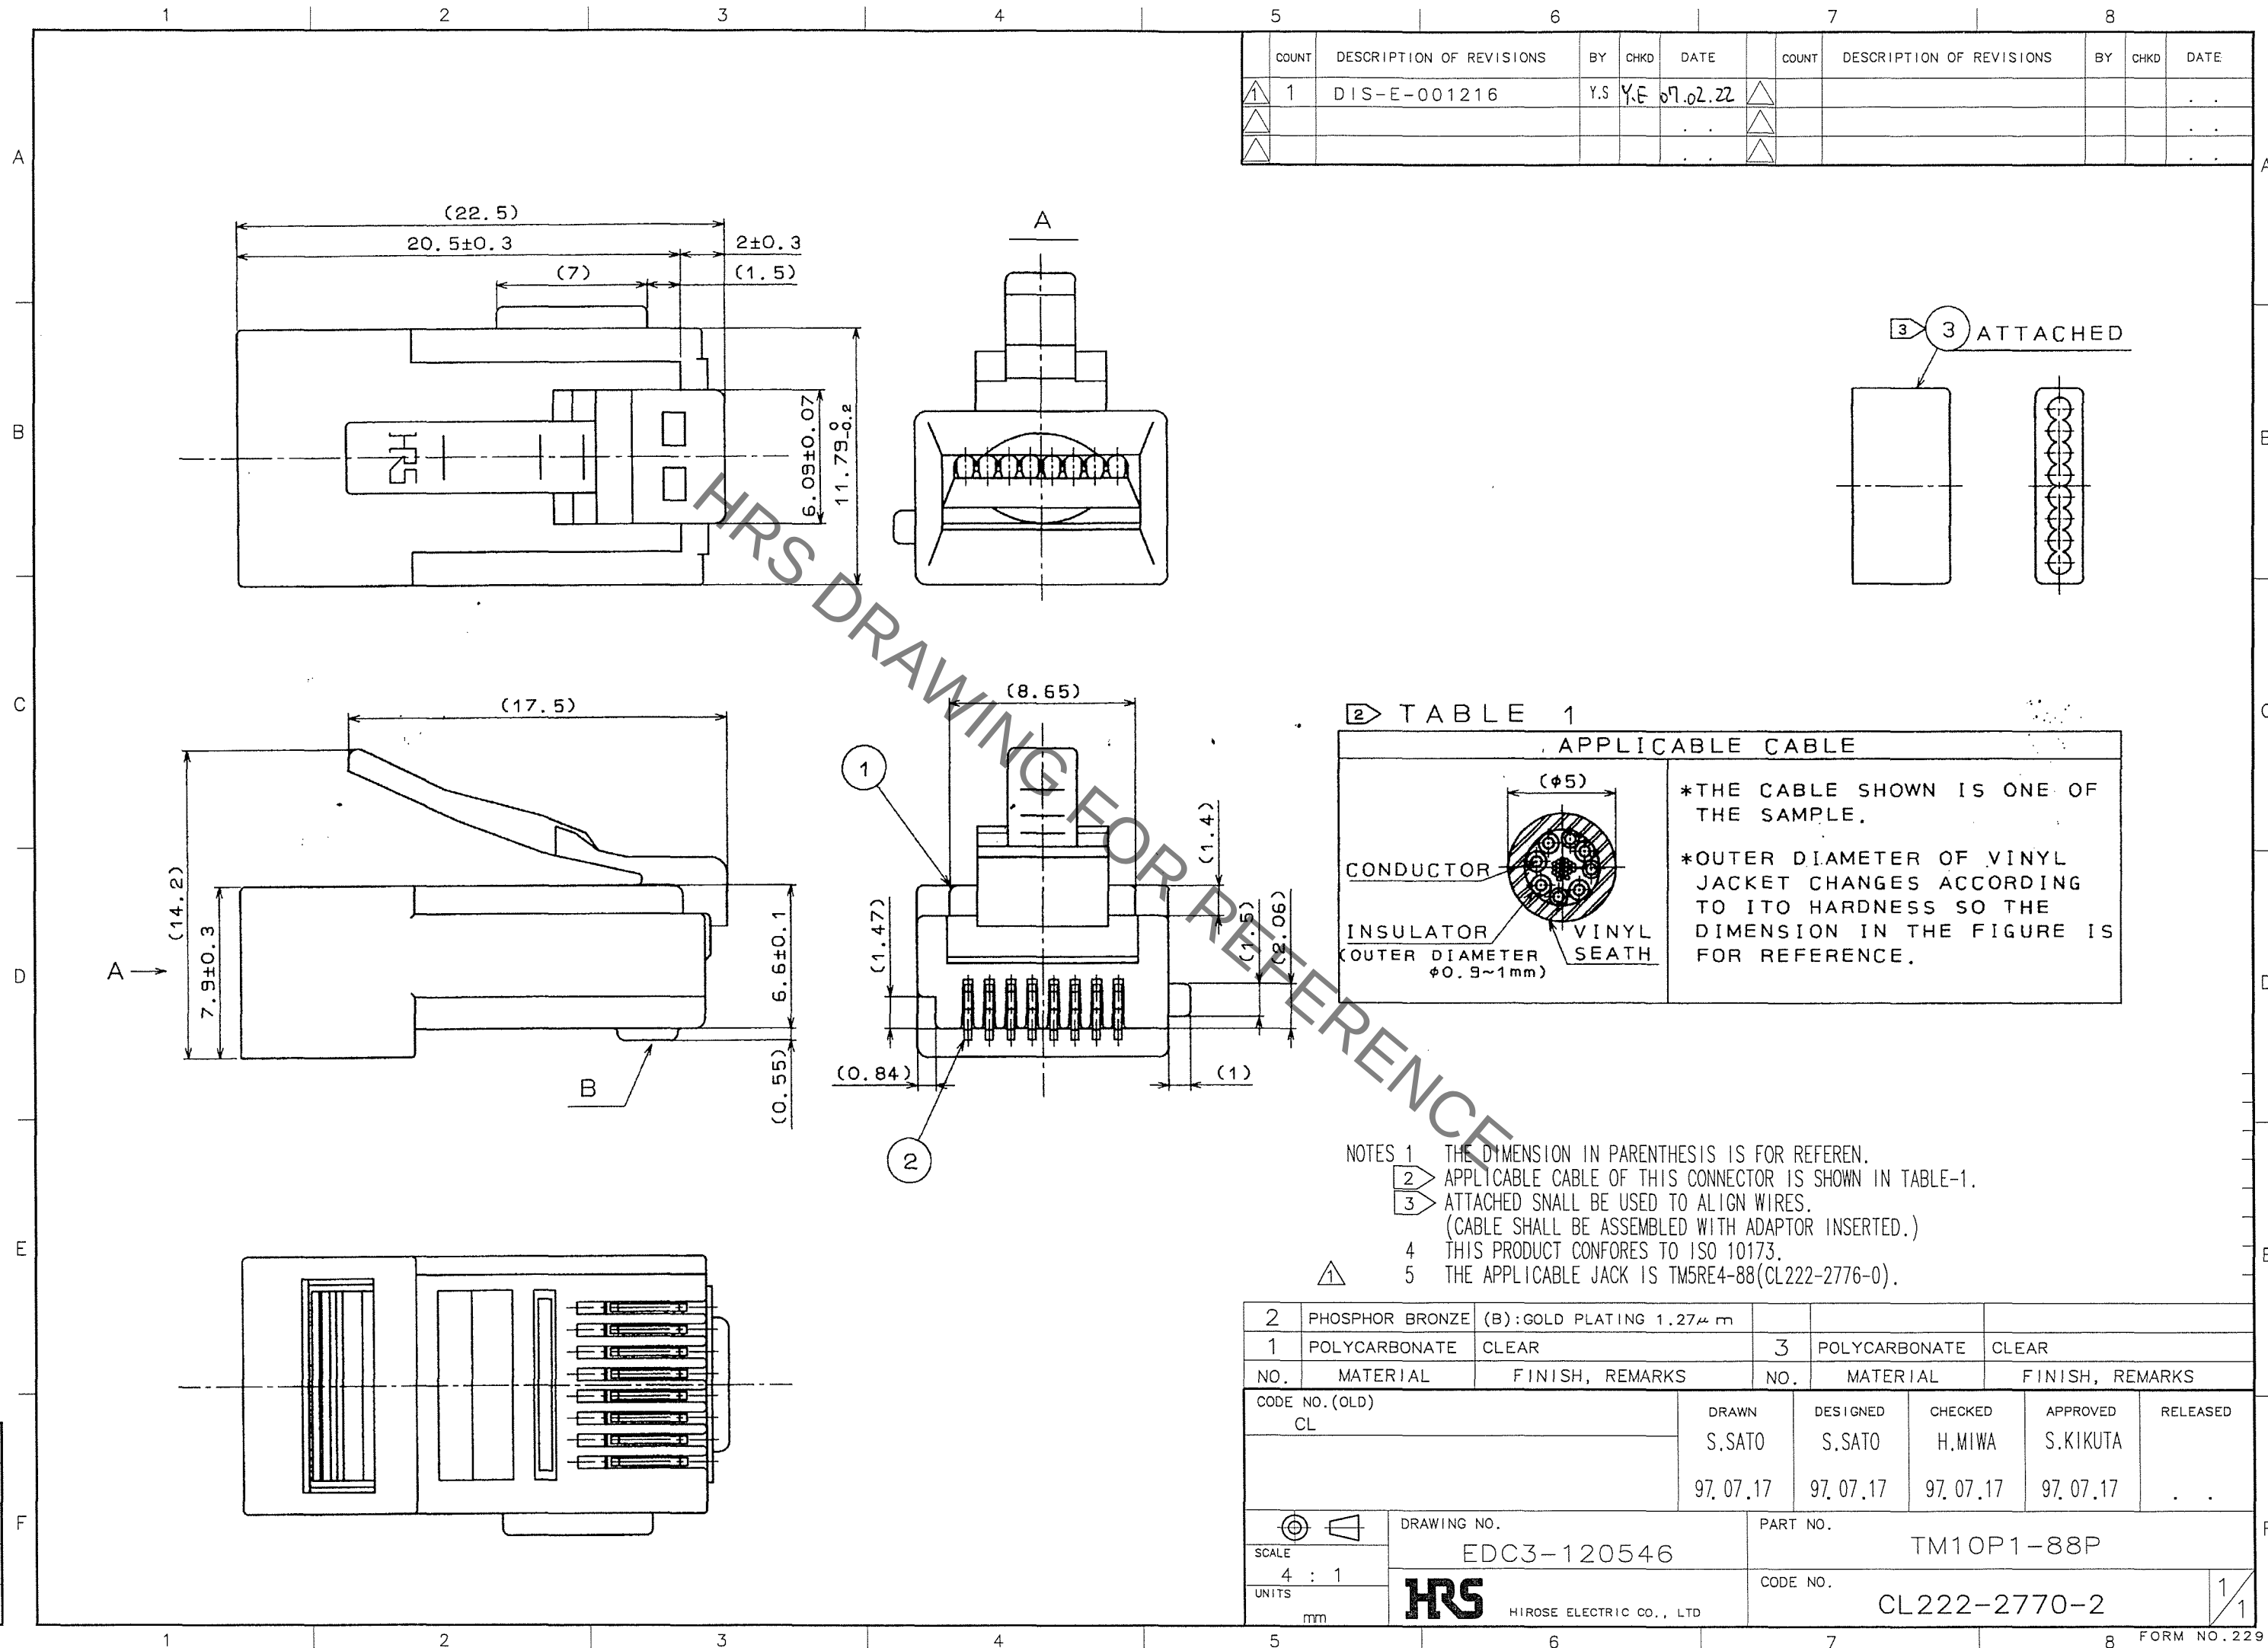



Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-E-001216	Y.S	Y.E	07.02.22					

TABLE 1 APPLICABLE CABLE	
 CONDUCTOR INSULATOR (OUTER DIAMETER $\phi 0.9 \sim 1 \text{ mm}$) VINYL SEATH	*THE CABLE SHOWN IS ONE OF THE SAMPLE. *OUTER DIAMETER OF VINYL JACKET CHANGES ACCORDING TO ITO HARDNESS SO THE DIMENSION IN THE FIGURE IS FOR REFERENCE.

- NOTES 1 THE DIMENSION IN PARENTHESIS IS FOR REFEREN.
2 APPLICABLE CABLE OF THIS CONNECTOR IS SHOWN IN TABLE-1.
3 ATTACHED SHALL BE USED TO ALIGN WIRES.
(CABLE SHALL BE ASSEMBLED WITH ADAPTOR INSERTED.)
4 THIS PRODUCT CONFORES TO ISO 10173.
5 THE APPLICABLE JACK IS TM5RE4-88(CL222-2776-0).

2	PHOSPHOR BRONZE	(B):GOLD PLATING 1.27μ m			
1	POLYCARBONATE	CLEAR	3	POLYCARBONATE	CLEAR
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN S.SATO 97.07.17	DESIGNED S.SATO 97.07.17	CHECKED H.MIWA 97.07.17
				APPROVED S.KIKUTA 97.07.17	RELEASED . .
DRAWING NO. EDC3-120546			PART NO. TM10P1-88P		
SCALE 4 : 1			CODE NO. CL222-2770-2		
UNITS mm			1/1		
 HIROSE ELECTRIC CO., LTD					