

FED. MFG. CODE 91929



CATALOG LISTING

KS-G0120

FAA-PMA

2X 6-32 UNC THREAD LOCKING
TYPE HEX NUT .31 ACROSS FLATS


DETENT SPRING

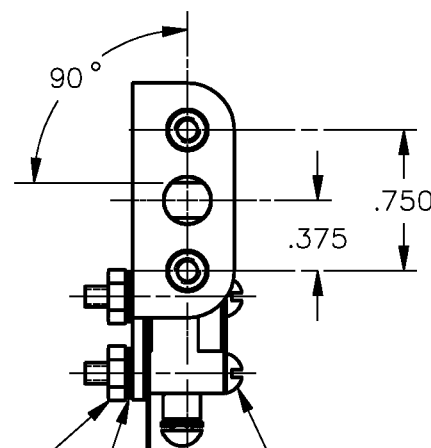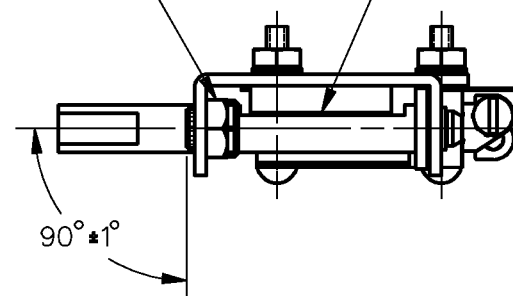



2X HEX NUT

2X LOCKWASHER


2X ROUND HEAD
MACHINE SCREW

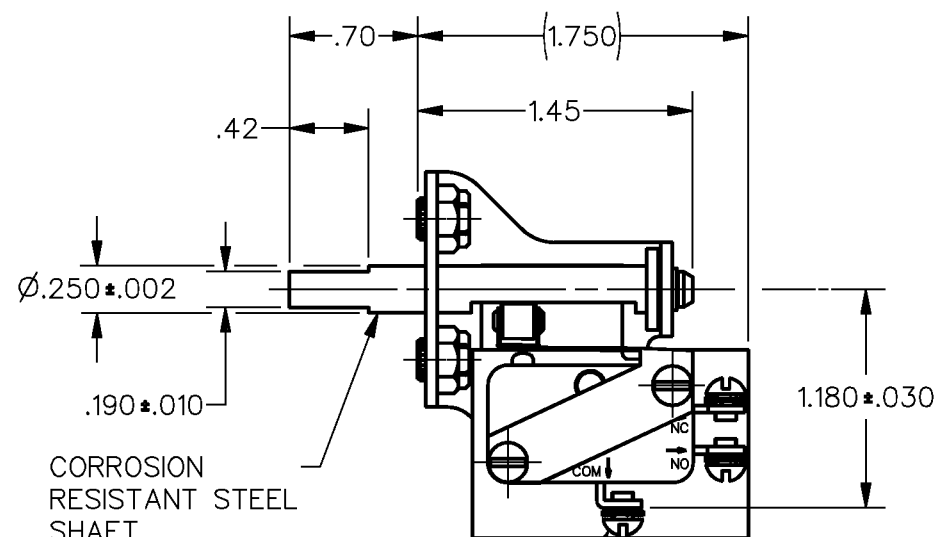

3X 4-40 UNC X (.125) ROUND HEAD
TERMINAL SCREW AND LOCKWASHER

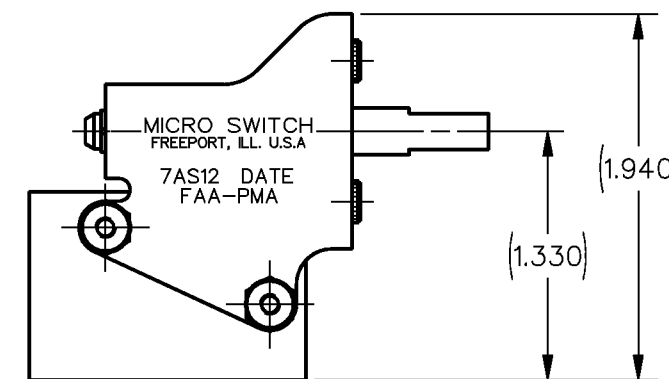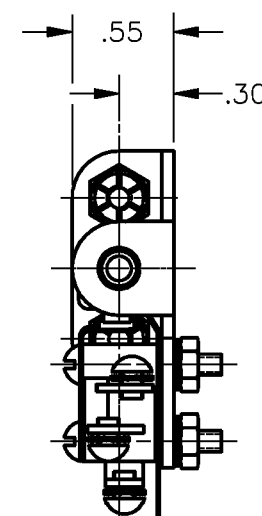

— FLEXIBLE INSULATOR

MECHANISM IN
POSITION NO. 1

POSITION OF SHAFT	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

;

N	SWITCH ACTUATED N.O. TO COM. MADE
---	--

NONE

•

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.


CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15.1A 1/2HP 125, 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"

THIRD ANGLE PROJECTION



SCALE	FULL
-------	------

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE	(.0)	$\pm .030$
-----------	------	------------

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES	$\pm 3^\circ$
--------	---------------

WEIGHT

NOTES

1 - UNIT INCLUDES CATALOG LISTING V3-201 BASIC SWITCH

2 - SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 20°F

3 - CATALOG LISTING, DATE OF MANUFACTURE AND FAA-PMA IS MARKED ON BRACKET

ANSI Y14.5M-1982 APPLIES