
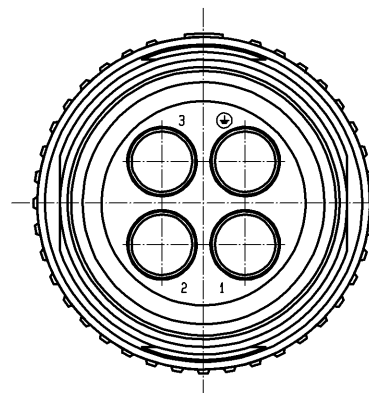
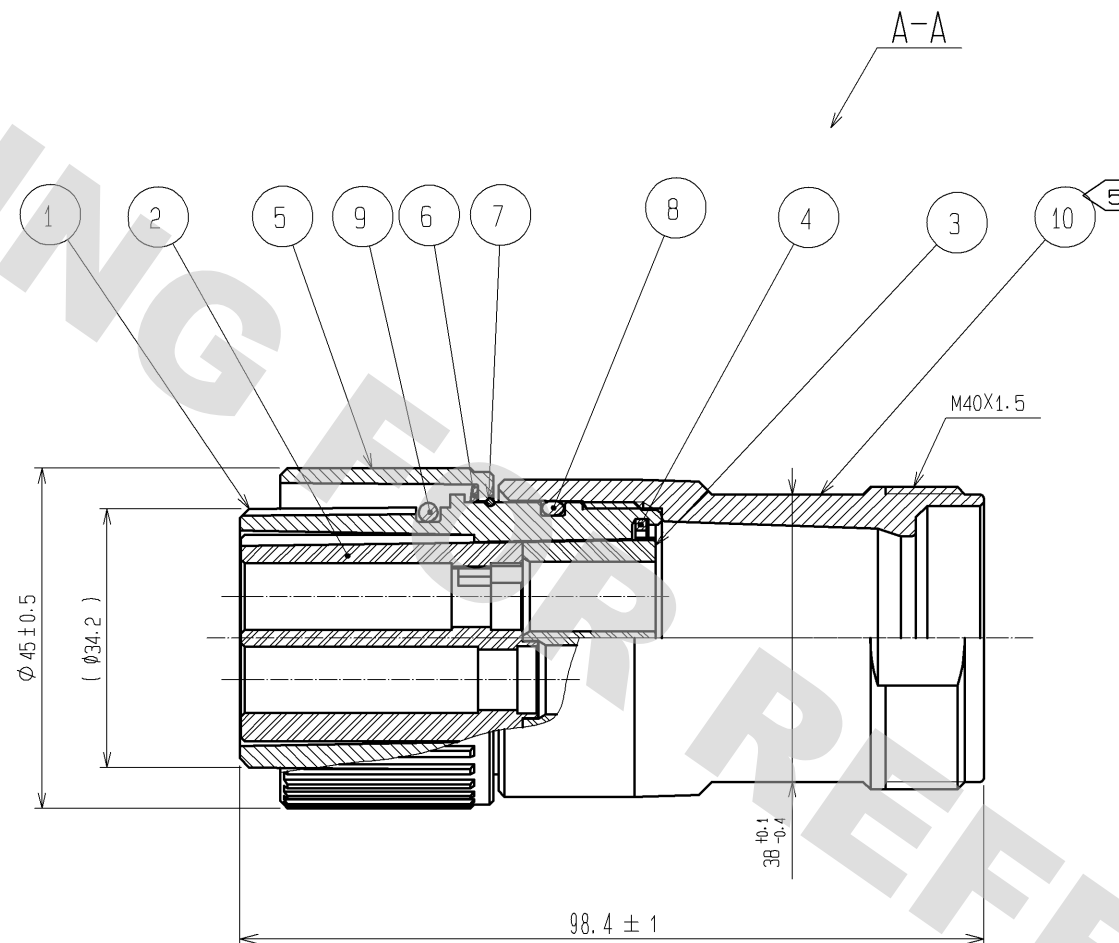


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

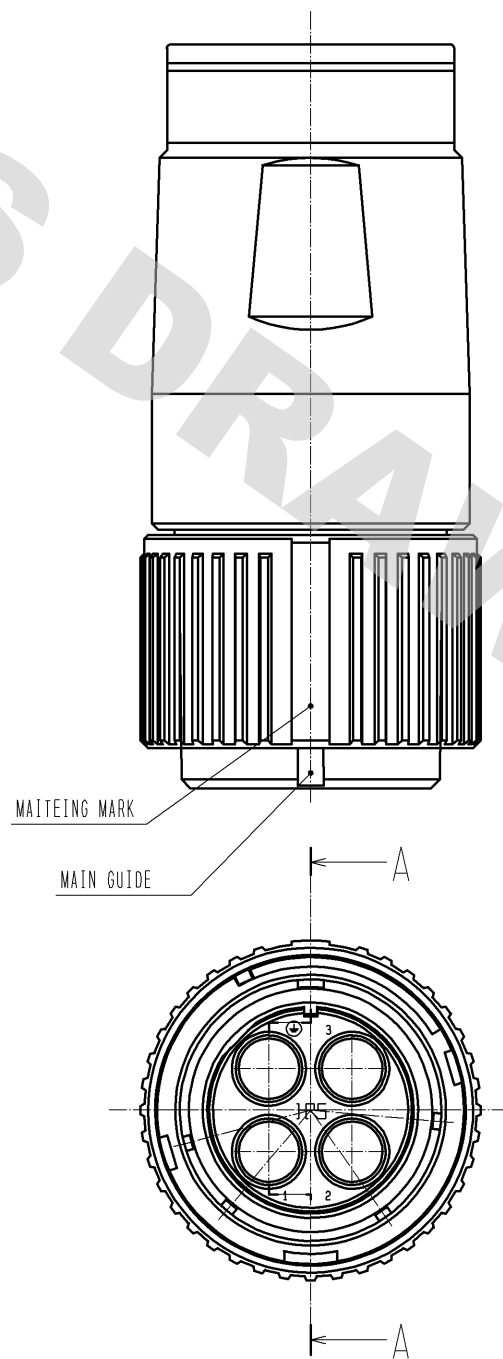

- △ NOTES
- 1 APPLICABLE CRIMPING CONTACT: EM-SC-133 (CL138-0018-7)
 - 2 APPLICABLE CRIMP CONTACT EXTRACTION TOOL: EM-8-TP (CL150-0249-3)
 - 3 APPLICABLE CABLE CLAMP: EM35WCC-※
※ SHOWS THE APPLICABLE CABLE DIAMETER.
 - 4 THE ASSEMBLY OF THIS PRODUCT APPLIES TO THE MANUAL ATAD-C0155.
 - 5 THE RECOMMENDED TIGHTENING TORQUE, ADHESIVE FOR SCREW PORTION OF REF NO. ⑩ AS FOLLOWINGS.
THE ADHESIVE SHOULD BE ATTACHED ON THE SCREW PORTION OF REF NO. ⑩
TIGHTENING TORQUE: 6 TO 7 N·m.
ADHESIVE: LOCTITE 242 MADE BY HENKEL JAPAN LTD.
 - 6 ROTATION EXAMPLES ARE SHOWN FOR REF. NO. ①, ②, AND ③.

5	ALUMINUM ALLOY	NICKEL PLATING	10	ALUMINUM ALLOY	NICKEL PLATING
4	STAINLESS STEEL		9	SILICONE RUBBER	(RED)
3	PBT	(BLACK) UL94V-0	8	SILICONE RUBBER	(RED)
2	PBT	(BLACK) UL94V-0	7	STAINLESS STEEL	
1	ALUMINUM ALLOY	NICKEL PLATING	6	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm			SCALE 1 : 1		
COUNT 1			DESCRIPTION OF REVISIONS DIS-C-001463		
APPROVED : SU. OBARA 09.10.05			DESIGNED HS. NAGANO		
CHECKED : HY. KOBAYASHI 09.10.05			CHECKED HY. KOBAYASHI		
DESIGNED : HS. NAGANO 09.10.02			DATE 09.10.30		
DRAWN : HS. NAGANO 09.10.02			DRAWING NO. EDC3-115596-00		
HIROSE ELECTRIC CO., LTD.			PART NO. EM35WBP-4SC		
			CODE NO. CL138-0008-3-00		