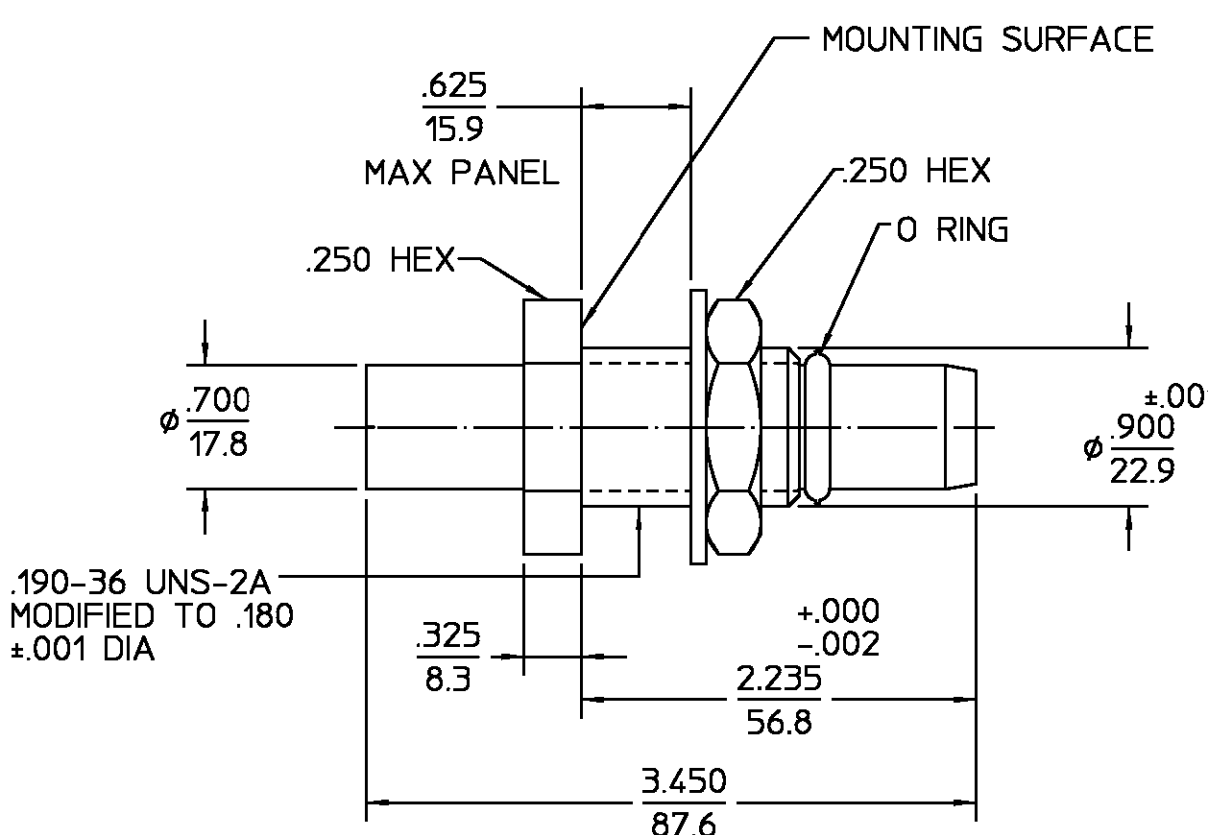


		DESIGNED FOR USE WITH FE12RL		REVISIONS																																																											
		CABLE ENTRY DIAMETER MINIMUM		REV	DESCRIPTION		DATE	APPROVED																																																							
		CONTACT .023		01	RELEASED		6/8/1998																																																								
		HOUSING .109																																																													
<table><tr><th>ELECTRICAL</th><th>MECHANICAL</th><th>ENVIRONMENTAL</th></tr><tr><td>Nominal Impedance (Ohms) 50 ±1</td><td>Interface Dimensions SEE CATALOG</td><td>Temperature Rating -65° to +125°C</td></tr><tr><td>Frequency Range (GHz) DC to 2</td><td>Mating Characteristics:</td><td>Vibration MIL-STD-202, Method 204, Condition D</td></tr><tr><td>Volt Rating (VRMS MAX) @ Sea Level 335</td><td>Insertion (MAX Lbs) 3</td><td>Shock MIL-STD-202, Method 213, Condition I</td></tr><tr><td>VSWR 1.05±.01 f(GHz)</td><td>Withdrawal (MIN Oz) 0.5</td><td>Thermal Shock MIL-STD-202, Method 107, Condition B</td></tr><tr><td>Insertion Loss (dB MAX) .04x√f(GHz)</td><td>Force to Engage (In-Lbs MAX) 3 & Disengage (In-Lbs MAX) 15</td><td>Moisture Resistance MIL-STD-202, Method 106</td></tr><tr><td>RF Leakage (dB MIN) (Interface Only, Fully Mated) -(90-f(GHz))</td><td>Center Contact Captivation Axial (Lbs) 4</td><td>Corrosion - MIL-STD-202, Method 101, Condition B</td></tr><tr><td>Corona, 70,000 Ft (VRMS MIN) 250</td><td>Cable Retention Axial Force (Lbs MIN) 30</td><td rowspan="5"> .XXX = in XX.X = mm (REF) </td></tr><tr><td>Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 675</td><td>Torque (In-Oz MIN) 16</td></tr><tr><td>Contact Resistance (Milliohms MAX)</td><td>Weight (Grams) TBD</td></tr><tr><td>Center Contact 6.0</td><td></td></tr><tr><td>Outer Contact 3.0</td><td></td></tr><tr><td>Cable to Housing 0.5</td><td></td><td></td></tr><tr><td>RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670</td><td></td><td></td></tr><tr><td>IR.(Megohms MIN) 5000</td><td></td><td></td></tr></table>		ELECTRICAL	MECHANICAL	ENVIRONMENTAL	Nominal Impedance (Ohms) 50 ±1	Interface Dimensions SEE CATALOG	Temperature Rating -65° to +125°C	Frequency Range (GHz) DC to 2	Mating Characteristics:	Vibration MIL-STD-202, Method 204, Condition D	Volt Rating (VRMS MAX) @ Sea Level 335	Insertion (MAX Lbs) 3	Shock MIL-STD-202, Method 213, Condition I	VSWR 1.05±.01 f(GHz)	Withdrawal (MIN Oz) 0.5	Thermal Shock MIL-STD-202, Method 107, Condition B	Insertion Loss (dB MAX) .04x√f(GHz)	Force to Engage (In-Lbs MAX) 3 & Disengage (In-Lbs MAX) 15	Moisture Resistance MIL-STD-202, Method 106	RF Leakage (dB MIN) (Interface Only, Fully Mated) -(90-f(GHz))	Center Contact Captivation Axial (Lbs) 4	Corrosion - MIL-STD-202, Method 101, Condition B	Corona, 70,000 Ft (VRMS MIN) 250	Cable Retention Axial Force (Lbs MIN) 30	.XXX = in XX.X = mm (REF)	Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 675	Torque (In-Oz MIN) 16	Contact Resistance (Milliohms MAX)	Weight (Grams) TBD	Center Contact 6.0		Outer Contact 3.0		Cable to Housing 0.5			RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670			IR.(Megohms MIN) 5000			<table><tr><td>HOUSING MOUNTING NUT LOCKWASHER</td><td>STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>DIELECTRIC</td><td>PTFE FLUOROCARBON PER ASTM-D-1457</td><td>N/A</td></tr><tr><td>CENTER CONTACT</td><td>BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>O-RING</td><td>FLUOROSILICONE 60 (DUROMETER) PER MIL-R-25988, CLASS 1, TYPE 1</td><td>N/A</td></tr><tr><td>COMPONENT</td><td>MATERIAL</td><td>FINISH</td></tr></table>		HOUSING MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204	DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A	CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	O-RING	FLUOROSILICONE 60 (DUROMETER) PER MIL-R-25988, CLASS 1, TYPE 1	N/A	COMPONENT	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1° These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission. DRAWN BY  DATE 1/21/98 CHECKED BY APP'D BY USE ASS'Y PROCEDURE NO. AP. TBD  AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599 TITLE OSSP BULKHEAD FEEDTHRU CABLE PLUG-DIRECT SOLDER ATTACHMENT SIZE B CODE IDENT NO. 26805 4703-5010-00 REV 01 SCALE 5:1 SHEET 1 OF 1			
ELECTRICAL	MECHANICAL	ENVIRONMENTAL																																																													
Nominal Impedance (Ohms) 50 ±1	Interface Dimensions SEE CATALOG	Temperature Rating -65° to +125°C																																																													
Frequency Range (GHz) DC to 2	Mating Characteristics:	Vibration MIL-STD-202, Method 204, Condition D																																																													
Volt Rating (VRMS MAX) @ Sea Level 335	Insertion (MAX Lbs) 3	Shock MIL-STD-202, Method 213, Condition I																																																													
VSWR 1.05±.01 f(GHz)	Withdrawal (MIN Oz) 0.5	Thermal Shock MIL-STD-202, Method 107, Condition B																																																													
Insertion Loss (dB MAX) .04x√f(GHz)	Force to Engage (In-Lbs MAX) 3 & Disengage (In-Lbs MAX) 15	Moisture Resistance MIL-STD-202, Method 106																																																													
RF Leakage (dB MIN) (Interface Only, Fully Mated) -(90-f(GHz))	Center Contact Captivation Axial (Lbs) 4	Corrosion - MIL-STD-202, Method 101, Condition B																																																													
Corona, 70,000 Ft (VRMS MIN) 250	Cable Retention Axial Force (Lbs MIN) 30	.XXX = in XX.X = mm (REF)																																																													
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 675	Torque (In-Oz MIN) 16																																																														
Contact Resistance (Milliohms MAX)	Weight (Grams) TBD																																																														
Center Contact 6.0																																																															
Outer Contact 3.0																																																															
Cable to Housing 0.5																																																															
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670																																																															
IR.(Megohms MIN) 5000																																																															
HOUSING MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204																																																													
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A																																																													
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204																																																													
O-RING	FLUOROSILICONE 60 (DUROMETER) PER MIL-R-25988, CLASS 1, TYPE 1	N/A																																																													
COMPONENT	MATERIAL	FINISH																																																													

CUSTOMER DRAWING

AMP PART # 1252853-1
SHEET 1 OF 1 REV B
PER EC # OU20-0261-01