
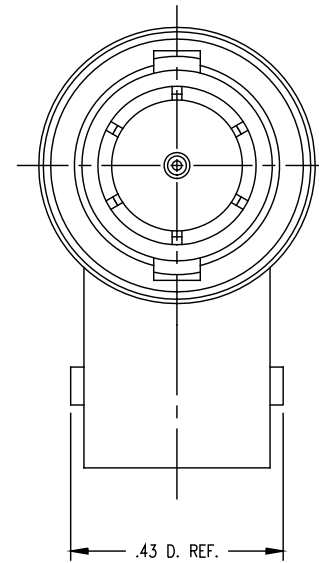


GSD

2029-20-9

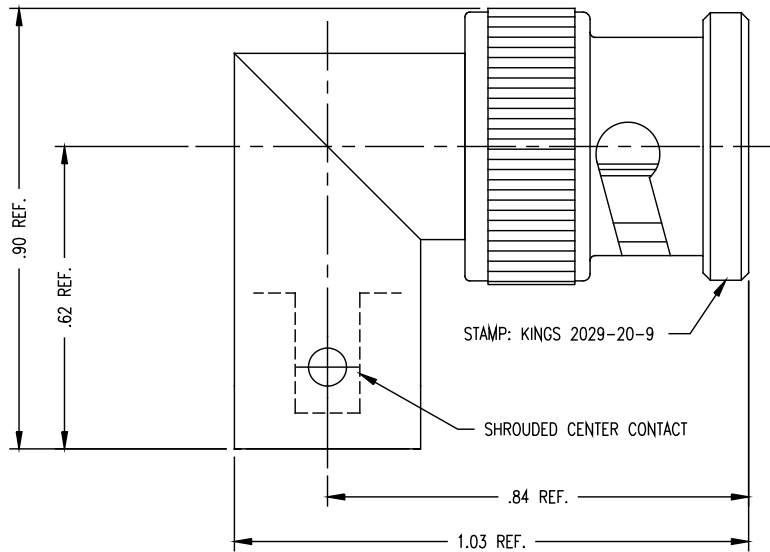

NOTES:

1. INTERFACES PER MIL-STD-348, FIG. 301-1 & 301-2 (AS APPLICABLE).
2. MATERIALS:
 - GASKET- SILICONE RUBBER, ZZ-R-765
 - INSULATORS- TEFLON, ASTM-D-1457
 - SPRING WASHER } BERYLLIUM COPPER, ASTM-B-196
 - OUTER CONTACT }
 - CENTER CONTACT }
 - ALL OTHER METAL PARTS- BRASS, ASTM-B16
3. FINISHES:
 - SPRING WASHER- SILVER PLATE PER QQ-S-365
 - CENTER CONTACT- HARD GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS- KINGS TARNISH RESISTANT FINISH (TR-5)
4. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE- 75 OHMS
 - WORKING VOLTAGE- 500 RMS

GSD

REVISIONS

ISSUE	CHANGES
0	ER 33939 MJB 05/22/92
1	CN 36063 E KH 02/01/95

WJM1803

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

ADAPTER, 75 BNC, ANGLE, M-F

DRAWN MJB DATE 05/22/92

DESIGN VLS DATE 05/26/92

APPR. DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

2029-20-9