

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
C6		ECR-18-009229	25SEP2018	DHC	PO

Materials			
No.	Component name	Base material	Finish
1	Housing	High Temp., UL 94V-0, green	
2	End terminal	silver clad copper alloy	5 microinches min. gold
3	Center terminal	copper alloy	5 microinches min. gold
4	Rocker contact	silver clad copper alloy	5 microinches min. gold
5	Actuator	Phenol resin, UL94 HB, black	
6	Plunger	stainless steel	
7	Spring	music wire	
8	Toggle	brass	chrome or Nickel
9	Retainer	Polyamide, UL94 HB, black	
10	Frame	cold rolled steel	zinc or Nickel
11	Bushing	brass	100 microinches min. nickel over 10 microinches min. copper
12	Mounting nut (1)	brass	200 microinches min. bright nickel
14	Internal tooth lockwasher	steel	zinc or Nickel
15	O-Ring, toggle seal		
16	O-Ring, panel seal		

NOT TO SCALE

Specifications-see note 3

Current rating UL & CSA	6A @ 125 VAC (resistive)			
	3A @ 250 VAC (resistive)			
	4A @ 28 VDC (resistive)			
Termination resistance	20 milliohms max @ 2-4 VDC, 1A			
Insulation resistance	1,000 megohms min.			
Withstanding voltage	1,000 VAC			
Travel	24 +/-6 degrees			
Actuation force	.05 to 1.5 kgf			
Operating temperature	-20C to +85C			
Storage temperature	-40C to +85C			
Contact timing	break before make			
Terminal seal	epoxy or Insert molded			
Durability	Parameter	2 Position	3 Position	Momentary
	mechanical (no load)	150,000	100,000	80,000
	250 VAC (3A resistive)	80,000	60,000	60,000
	125 VAC (6A resistive)	80,000	60,000	60,000
	28 VDC (4A resistive)	60,000	50,000	40,000

RECOMMENDED PANEL LAYOUT

TO PREVENT ROTATION

1 POLE

2 POLES

3 POLES

4 POLES

PC BOARD LAYOUT

PC TERMINAL ONLY

NOTES:

1. TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON THE SWITCHES.

2. EACH SWITCH SUPPLIED WITH THE FOLLOWING MOUNTING HARDWARE:

(1) 1/4-40 UNS-2B HEX NUTS

(1) INTERNAL TOOTH LOCKWASHER

(1) LOCATING RING

5. WIRE LUG CONTACTS WILL ACCEPT 2 #20 AWG SOLID OR STRANDED WIRES.

6. CUSTOMER INSTALLED EXTERNAL JUMPER BETWEEN TERMINALS 2 AND 4 REQUIRED FOR 1 POLE 3 THROW FUNCTION.

7. OBSOLETE

8. LASER MARKING USED FOR PARTS.

Part Number	Alco Model	Poles	Throws	Function	Terminal				Comments
8-1437558-1	MTE406P	4	2	ON OFF ON	Wire lug	2-3, 5-6, 8-9, 11-12	Off	2-1, 5-4, 8-7, 11-10	
8-1437558-0	MTE406N	4	2	ON ON	Wire lug	2-3, 5-6, 8-9, 11-12	---	2-1, 5-4, 8-7, 11-10	
7-1437558-9	MTE306E	3	2	ON OFF ON	Wire lug	2-3, 5-6, 8-9	Off	2-1, 5-4, 8-7	
7-1437558-8	MTE306D	3	2	ON ON	Wire lug	2-3, 5-6, 8-9	---	2-1, 5-4, 8-7	
7-1437558-7	MTE206T	2	2	ON OFF(ON)	Wire lug	2-3, 5-6	OFF	2-1, 5-4	
7-1437558-6	MTE206S	2	2	(ON) OFF (ON)	Wire lug	2-3, 5-6	OFF	2-1, 5-4	
7-1437558-5	MTE206R	2	2	ON (ON)	Wire lug	2-3, 5-6	---	2-1, 5-4	
7-1437558-4	MTE206PA	1	3	ON ON ON	Wire lug	5-6	5-3	5-1	note 6
7-1437558-3	MTE206P	2	2	ON OFF ON	Wire lug	2-3, 5-6	OFF	2-1, 5-4	
7-1437558-2	MTE206N	2	2	ON ON	Wire lug	2-3, 5-6	---	2-1, 5-4	
7-1437558-1	MTE106G	1	2	(ON) OFF (ON)	Wire lug	2-3	OFF	2-1	
7-1437558-0	MTE106F	1	2	ON (ON)	Wire lug	2-3	---	2-1	
6-1437558-9	MTE106E	1	2	ON OFF ON	Wire lug	2-3	Off	2-1	
6-1437558-8	MTE106D	1	2	ON ON	Wire lug	2-3	---	2-1	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC +/-

1 PLC +/-

2 PLC +/-

3 PLC +/- .005

4 PLC +/-

ANGLES +/-

FINISH -

DWN M. BINNER

CHK M. ZITTO

APVD M. ZITTO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 0

CUSTOMER DRAWING

OBAPR04

OBAPR04

OBAPR04

NAME

SIZE A1

CAGE CODE

DRAWING NO 00779

RESTRICTED TO

TE Connectivity Ltd.

TOGGLE SWITCH, MTE SERIES

VERTICAL MOUNT

6-1437558-8


SCALE 2:1

SHEET 1 OF 3

REV C6



4805 (1/15)

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

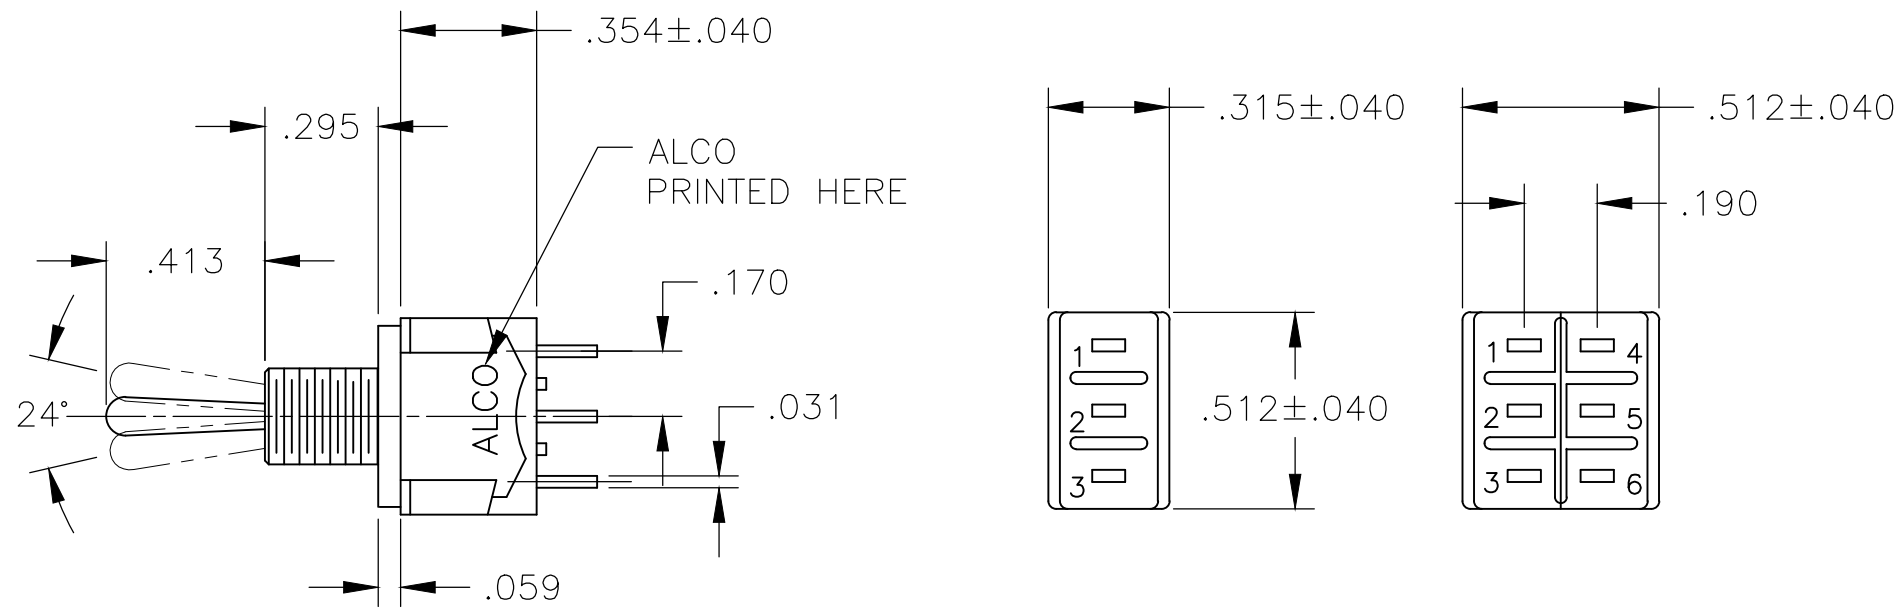


MTE-106


MTE-206

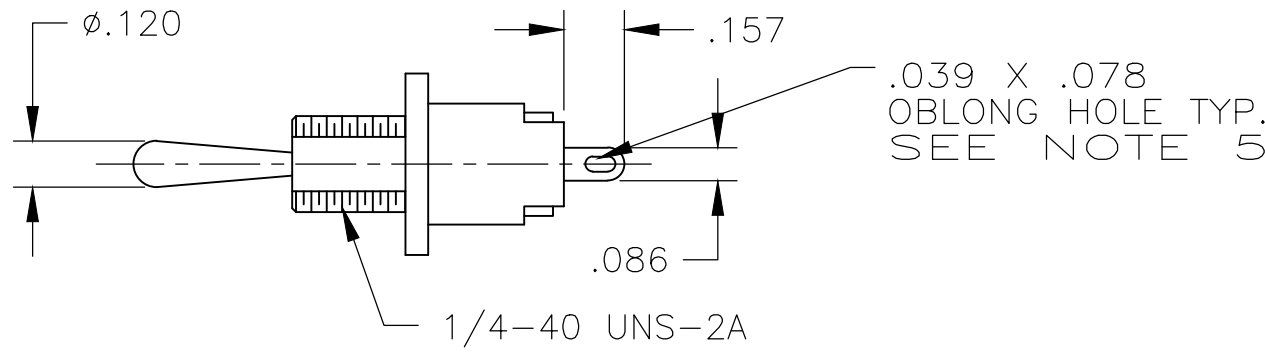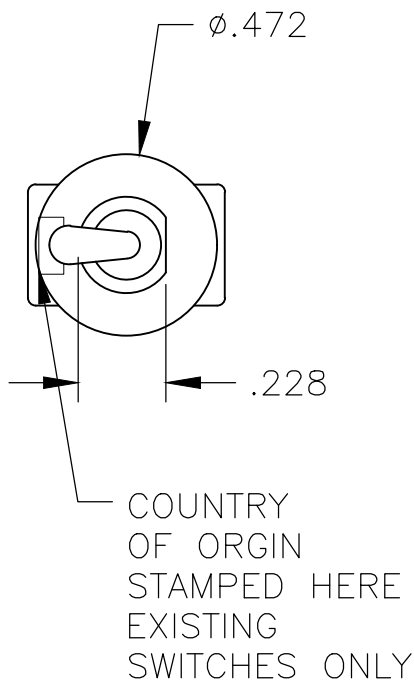

WIRE LUG TERMINAL

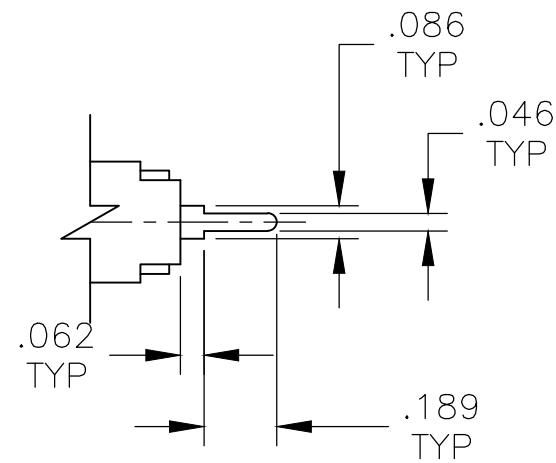


PC TERMINAL


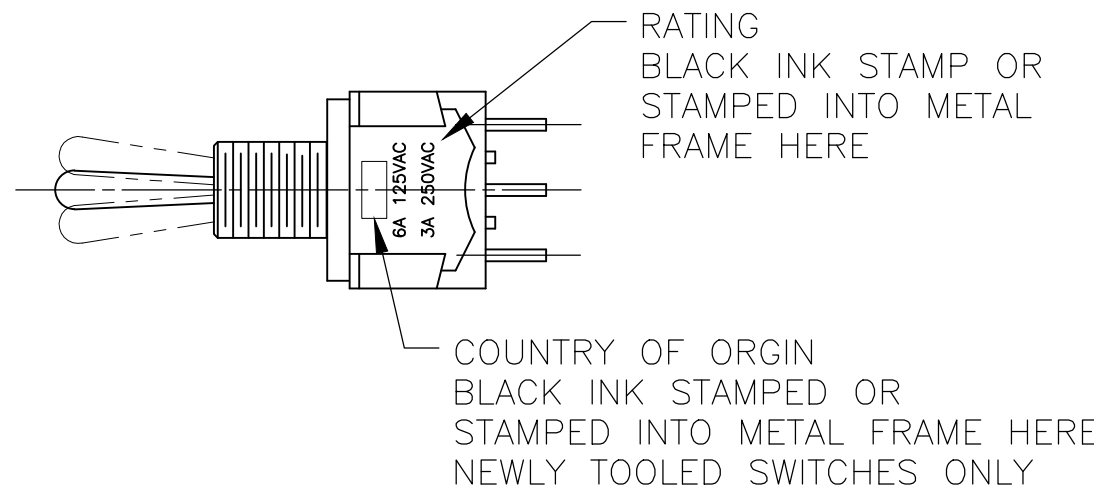


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER CHK M. ZITTO APVD M. ZITTO	08APR04 08APR04 08APR04	TE Connectivity Ltd.	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	APPLICATION SPEC	TOGGLE SWITCH, MTE SERIES VERTICAL MOUNT	
0. PLC ± .005 1. PLC ± .005 2. PLC ± .005 3. PLC ± .005 4. PLC ± .005 ANGLES ± .005	± .005 ± .005 ± .005 ± .005 ± .005 ± .005	— — — — — —	— — — — — —	—	
MATERIAL —	FINISH —	WEIGHT —	—	A1 00779 6-1437558-8	
CUSTOMER DRAWING		SCALE 2:1	SHEET 2	OF 3	REV C6


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

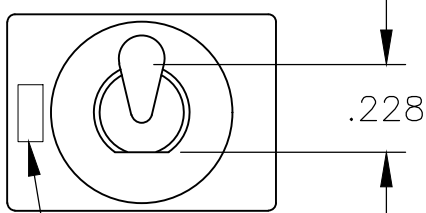


COUNTRY OF ORGIN
STAMPED HERE
EXISTING
SWITCHES ONLY

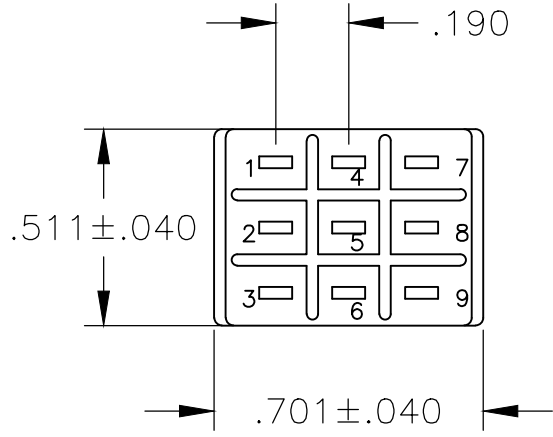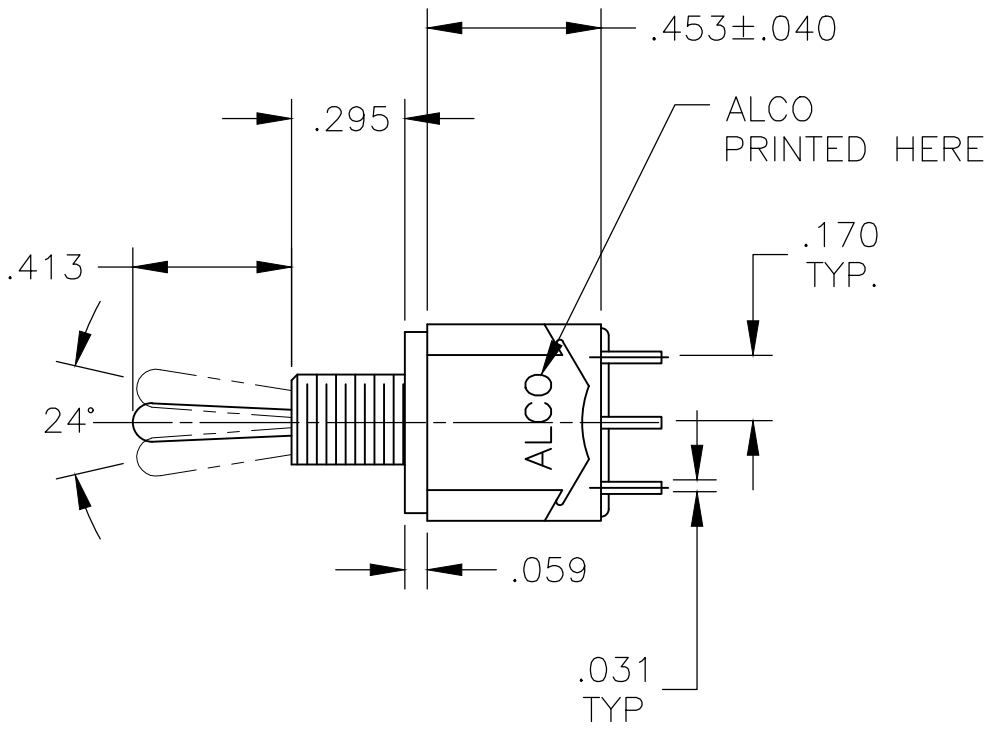


MTE-306

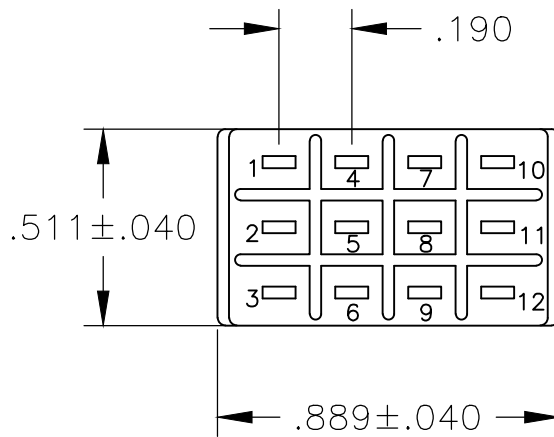


MTE-406

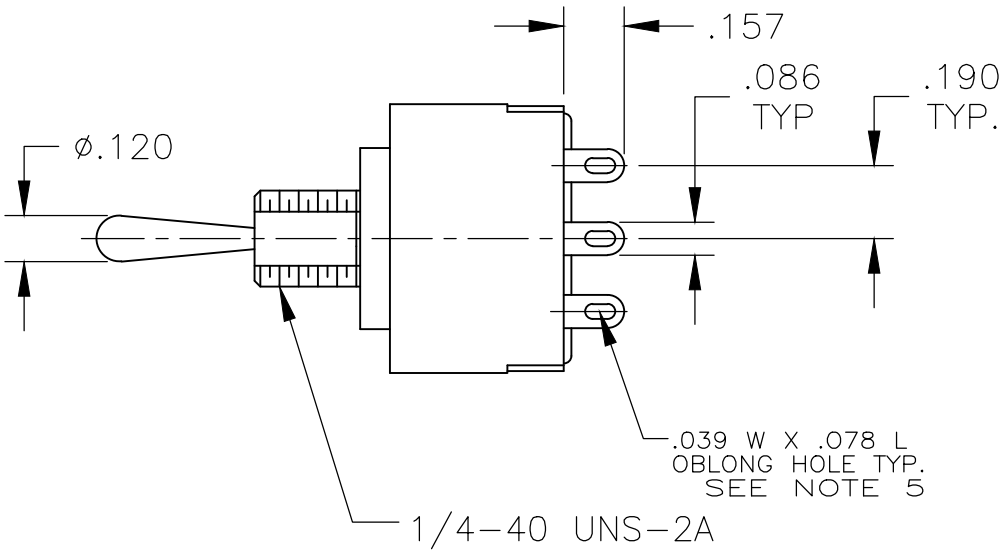

WIRE LUG TERMINAL

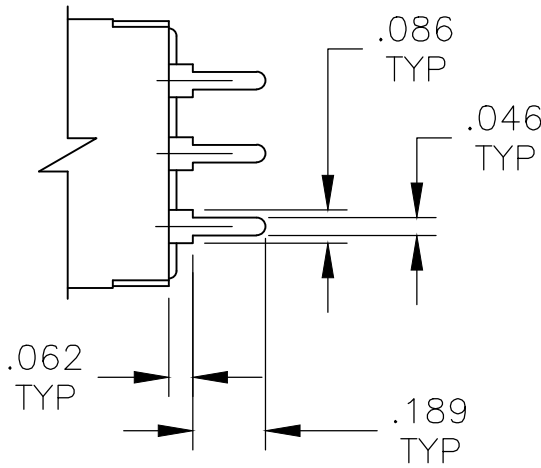

PC TERMINAL

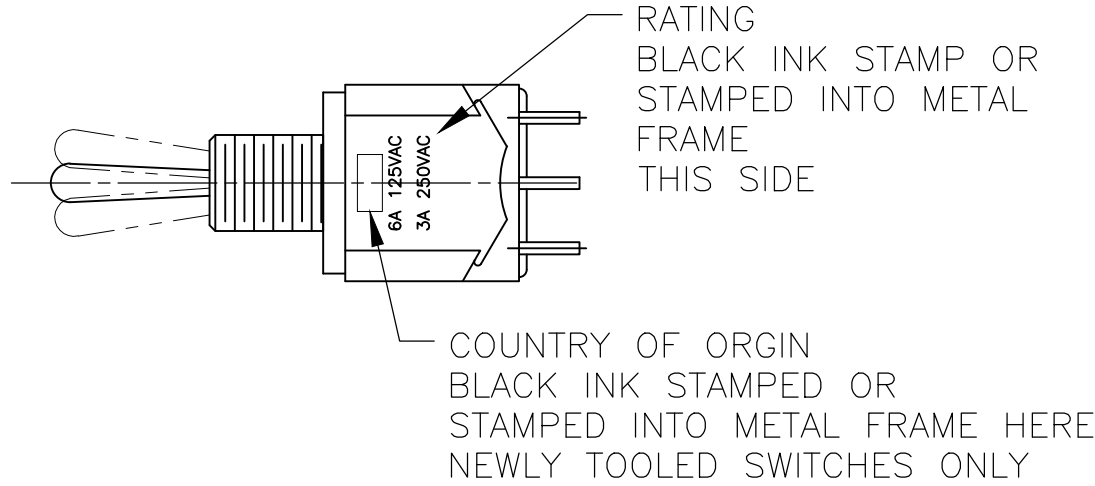

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
M. BINNER
08APR04

CHK
M. ZITTO
08APR04

APVD
M. ZITTO
08APR04

TE Connectivity Ltd.

DIMENSIONS:
INCHES

0. PLC ± -

1. PLC ± -

2. PLC ± -

3. PLC ± .005

4. PLC ± -

ANGLES ± -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

—

NAME
TOGGLE SWITCH, MTE SERIES
VERTICAL MOUNT

SIZE
A1

CAGE CODE
00779

DRAWING NO
6-1437558-8

RESTRICTED TO
—

CUSTOMER DRAWING

SCALE
2:1

SHEET
3

OF
3

REV
C6