

CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION


High Pass Filter
50 Ω BNC
150 MHz 7th Order



Part Number: CHPFL-0150-BNC



Schematic

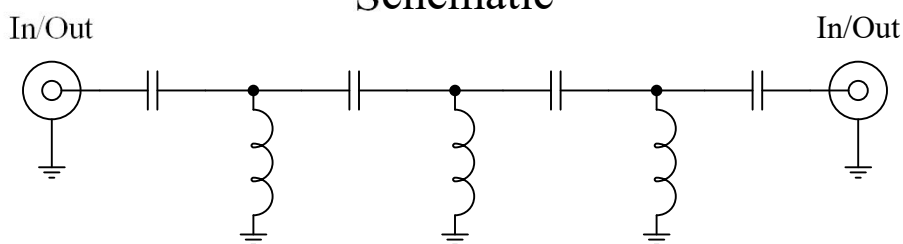

Features:


- 7th Order Chebyshev Response
- 50 Ω BNC Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -45°C to 90°C
- 50 VDC

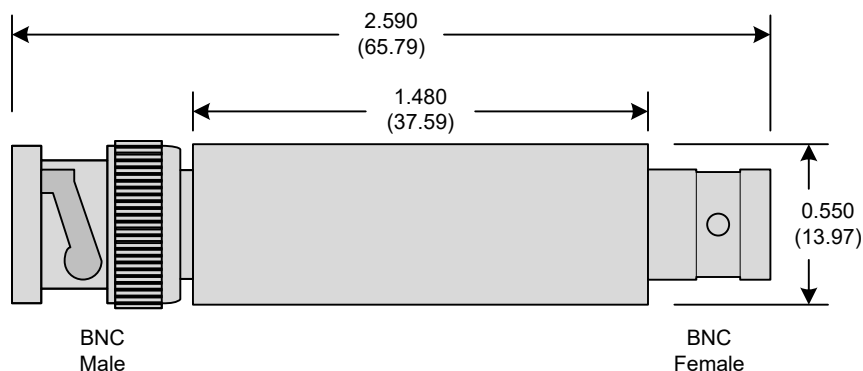

Crystek's new line of BNC High Pass Filters are designed in a rugged BNC housing. This filter line has excellent out-of-band rejection.

Designed for Test Equipment and General Lab Use.




Rev B


Page 1 of 3



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

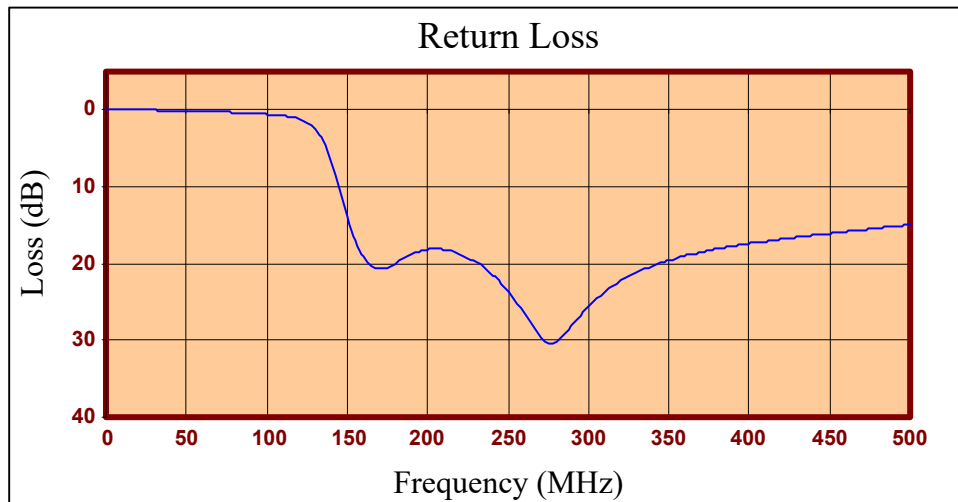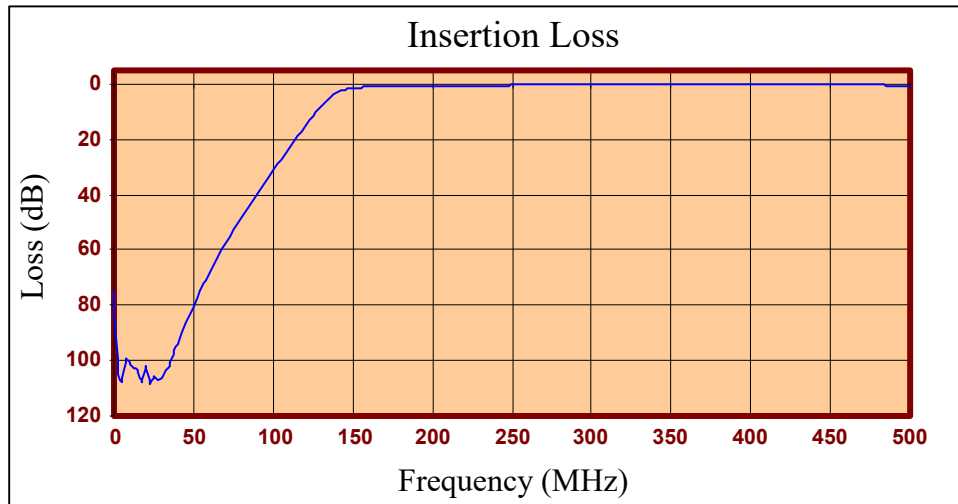



FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.300	74.83	0.03
2.799	105.03	0.00
5.297	107.78	0.00
7.796	99.38	0.00
10.294	101.00	0.00
12.793	102.79	0.00
15.291	103.67	0.01
17.790	108.08	0.01
20.288	101.69	0.02
22.787	108.41	0.02
25.285	105.95	0.03
27.784	106.81	0.03
30.282	106.13	0.04
32.781	103.44	0.05
35.279	102.32	0.06
40.276	94.46	0.08
42.775	89.65	0.09
47.772	83.24	0.11
50.270	80.27	0.13
52.769	76.58	0.14
55.267	73.42	0.15
60.264	67.96	0.18
65.261	62.54	0.22
70.258	57.49	0.25
72.757	55.06	0.27
95.243	35.25	0.50
130.222	7.80	2.50
147.712	1.60	12.12
170.198	0.81	20.67
200.180	0.61	18.18
225.165	0.49	19.23
250.150	0.39	23.78
277.634	0.33	30.33
300.120	0.31	25.59
325.105	0.31	21.68
375.075	0.33	18.34
455.027	0.36	15.97
500.000	0.41	14.94

Product Control:

Crystek Part Number:	CHPFL-0150-BNC	Release Date:	25-Jul-2017
Revision Level:	B	Responsible:	K. Piotrowicz

Rev B

Page 3 of 3

