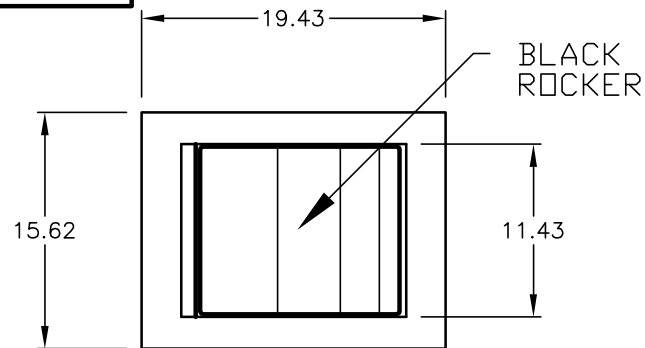
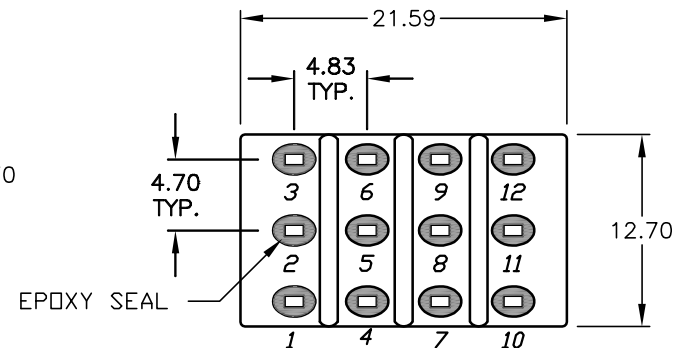
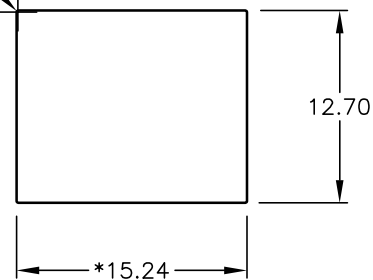



R. 0.13
(4 PL)

BOTTOM VIEW

CIRCUIT: 4PDT
CONTACT CONFIGURATION

SWITCH FUNCTION



PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3, 5-6 8-9, 11-12	OPEN	2-1, 5-4 8-7, 11-10

RECOMMENDED PANEL MOUNTING

PANEL THICKNESS

1.52 TO 3.18

▲ * DIMENSION IS 15.75/15.88
FOR PANEL THICKNESS BETWEEN
1.52mm TO 3.18mm

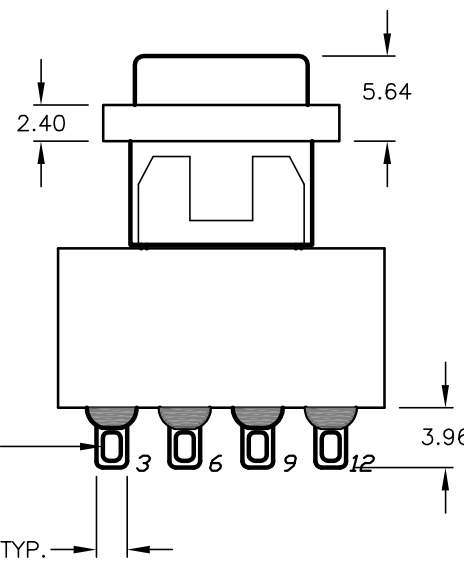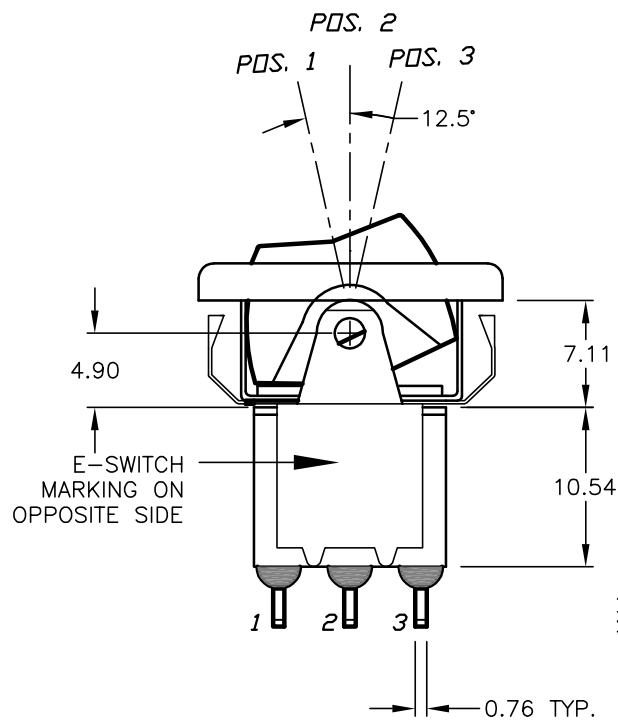1.88 X 1.2
SLOT TYP.

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4 VOLT-AMPS @ 20 VOLTS
MAX. AC OR DC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
COPPER ALLOY WITH GOLD PLATE
OVER NICKLE PLATE
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

E-SWITCH®

TITLE

3004P1R6BLKM1REBLK

SCALE

2:1

DATE

12/23/03

DR

AR

DWG

T346007

REV

A

A	13672	RELEASED FOR PRODUCTION	12/23/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED