


DASH NO.	M CODE	MADE FROM
----------	--------	-----------


SD

7704-1

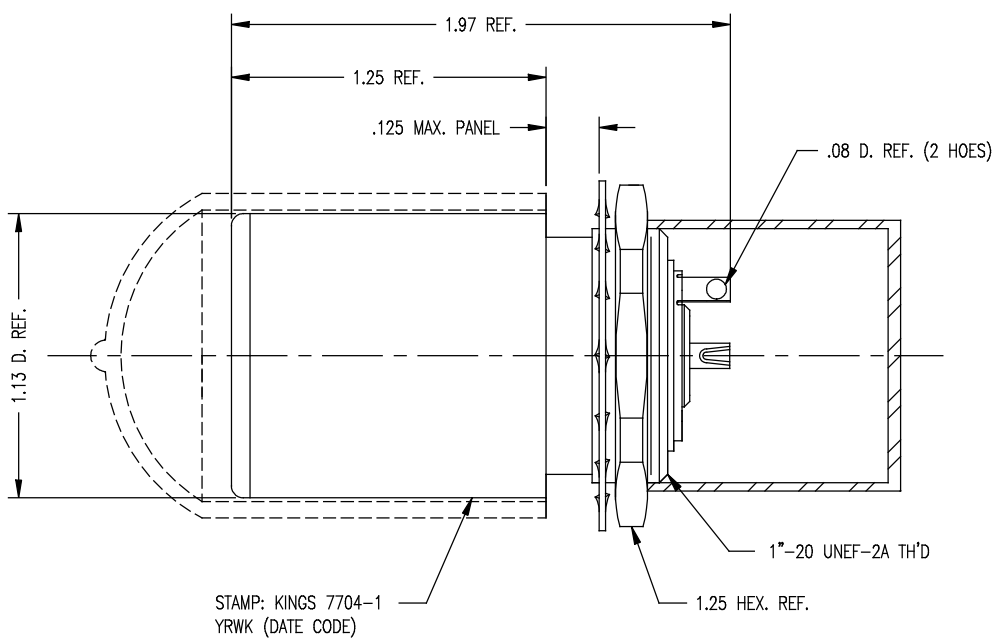

NOTES:

1. MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
CAP: VINYL
CENTER CONTACT }
OUTER CONTACT SPRING } BER. COP., ASTM-B-196
INSERT }
LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103
ALL OTHER METAL PARTS: BRASS, ASTM-B16
2. FINISHES:
OUTER CONTACT SPRING }
CENTER CONTACT } GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
3. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC-500 MHz
VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VOLTS RMS
INNER GROUND/OUTER GROUND: 500 VOLTS RMS

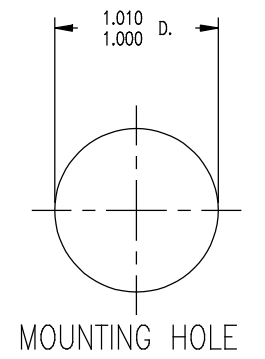

SD

REVISIONS		
ISSUE	CHANGES	
0	ER 35437 KH 04/19/95	
1	CN 36754 E ME 12/22/95	
2	CN 37274 D PG 03/12/97	
3	CN 37336 D PG 04/07/97	
4	CN 37424 C MRM 08/26/97	
5	CN 38122 C BDH 11/07/00	
77041C		
SCALE 2:1		
APPROX SURFACE AREA		
USED ON		
REF: KP-8060-001-000		
RECEPTACLE, BKHD, TRI-LOC SERIAL DIGITAL		
DRAWN	ME	DATE 10/31/95
DESIGN	FD	DATE 10/31/95
APPR.		DATE
KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730		
7704-1		