

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
RF


A
B
C
D
E
F

1 2 3 4

1 2 3 4

5					6					7					8				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△							..			△							..		
△							..			△							..		
△							..			△							..		

APPLICABLE OUTER CONDUCTOR CRIMPING TOOL : HT303/UM.MSS-T-1 (2.5 HOLE)

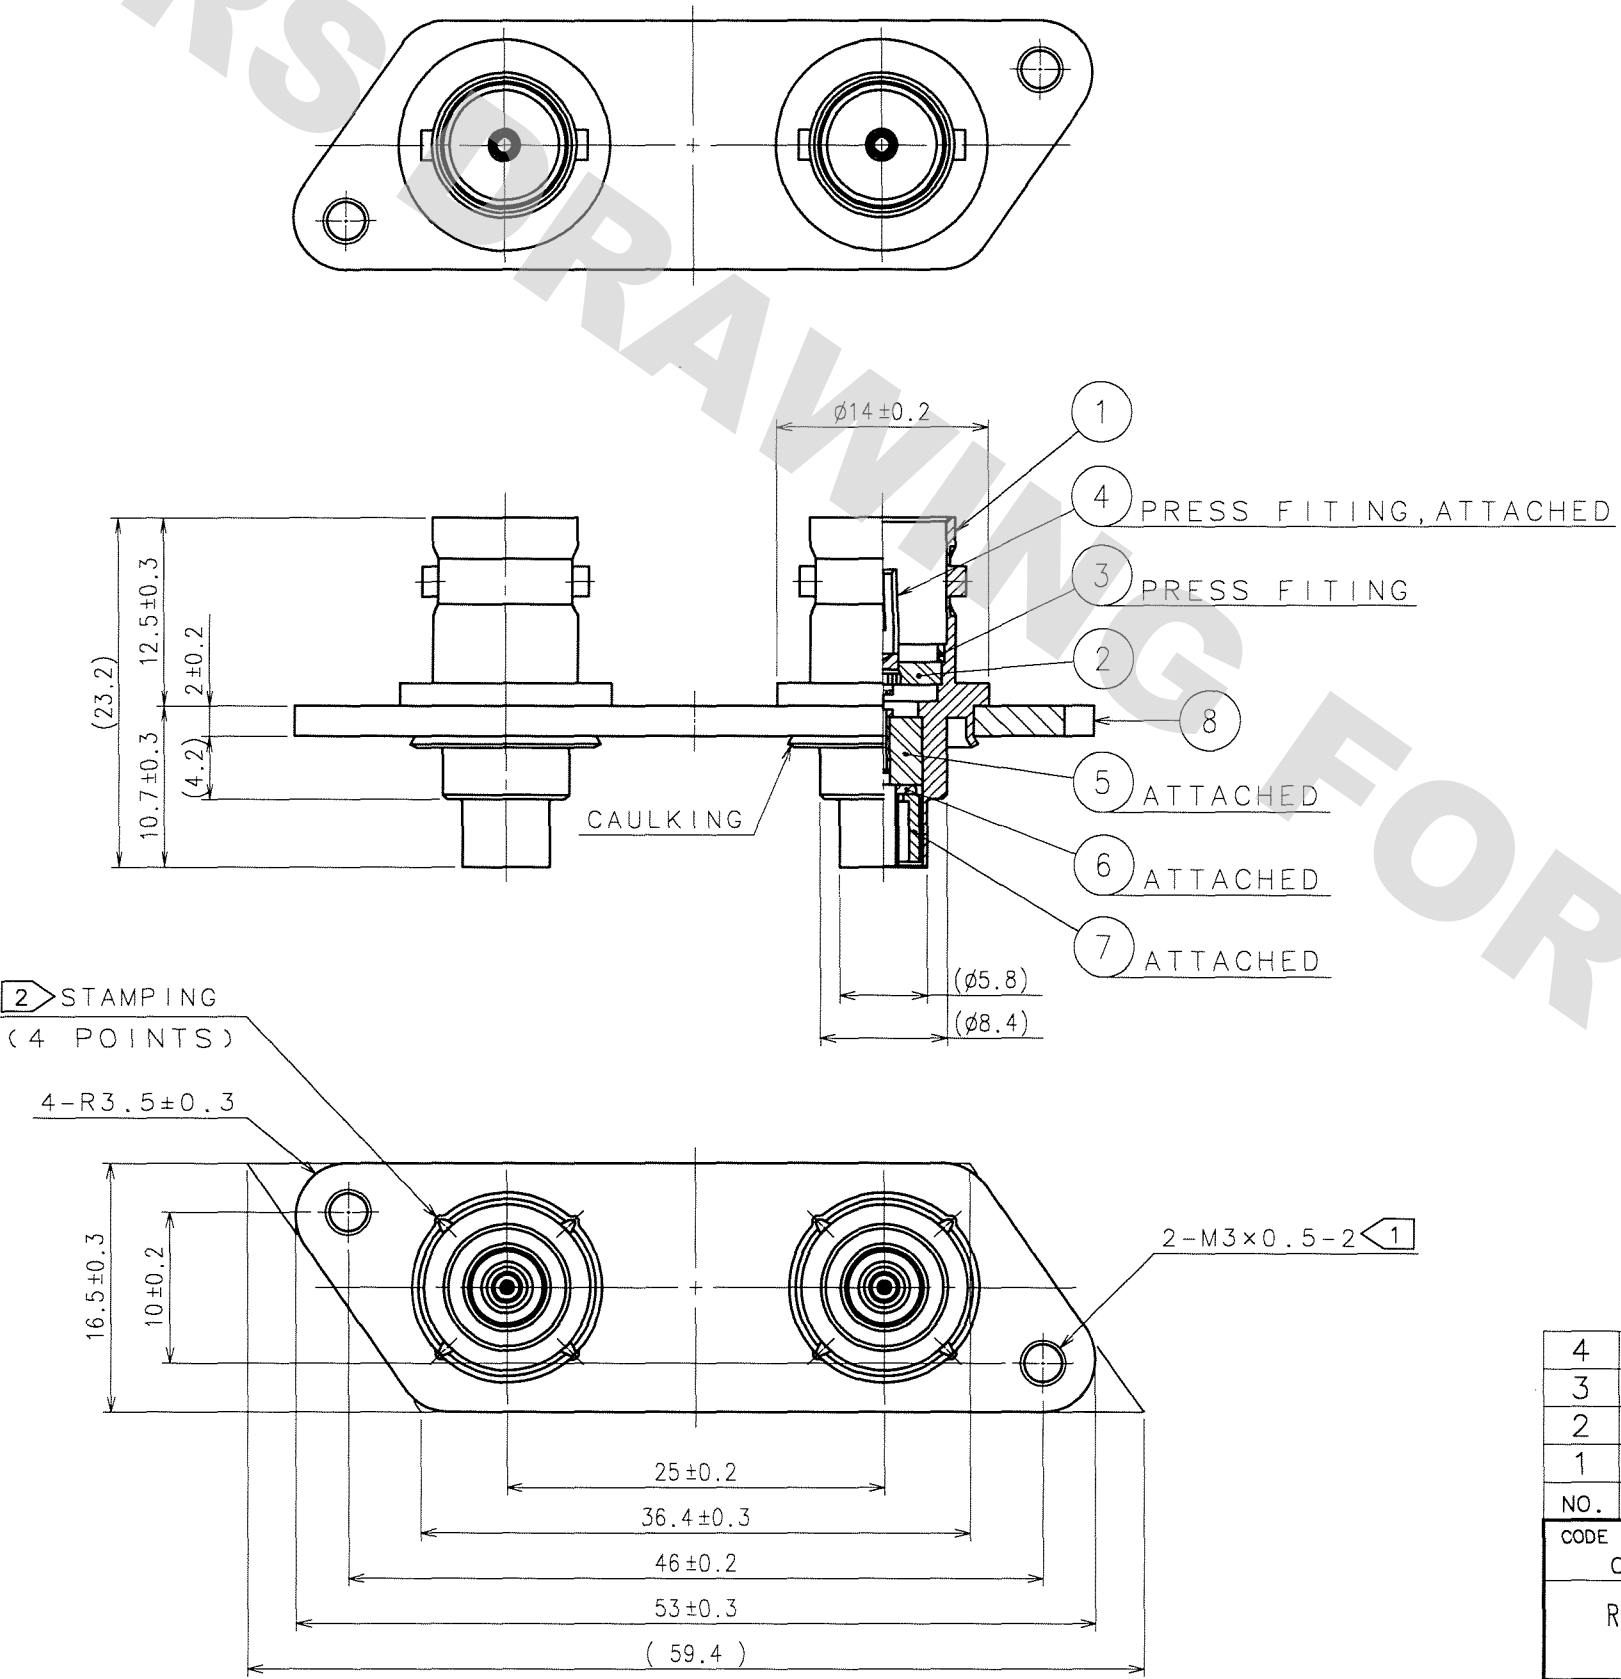

Notes 1 Threading process upraises the material at the screw opening.
2 Stamping process for anchoring could make cracks at some of the stamped area.

4	BERYLLIUM COPPER	GOLD PLATING	8	BRASS	NICKEL PLATING
3	BRASS	NICKEL PLATING	7	BRASS	NICKEL PLATING
2	PTFE		6	BRASS	NICKEL PLATING
1	BRASS	NICKEL PLATING	5	PTFE	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL		DRAWN N.OOSAWA 07.06.22	DESIGNED T. Katayama 07.06.25	CHECKED K. Shimizu 07.06.26	APPROVED J. Mitoku 07.06.26
RoHS COMPLIANT		RELEASED ..			
DRAWING NO. EDC3-131437-41		PART NO. BNC(75)-PJ-1.5CV-2P(41)			
SCALE 2 : 1		CODE NO. CL302-0371-0-41			
UNITS mm		HRS HIROSE ELECTRIC CO., LTD			

A
B
C
D
E
F