

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

FT

0

P

LTR

DESCRIPTION

DATE

DWN

APVD


D

REVISED PER 0G3B-0008-04

1/9/04

SS

GS

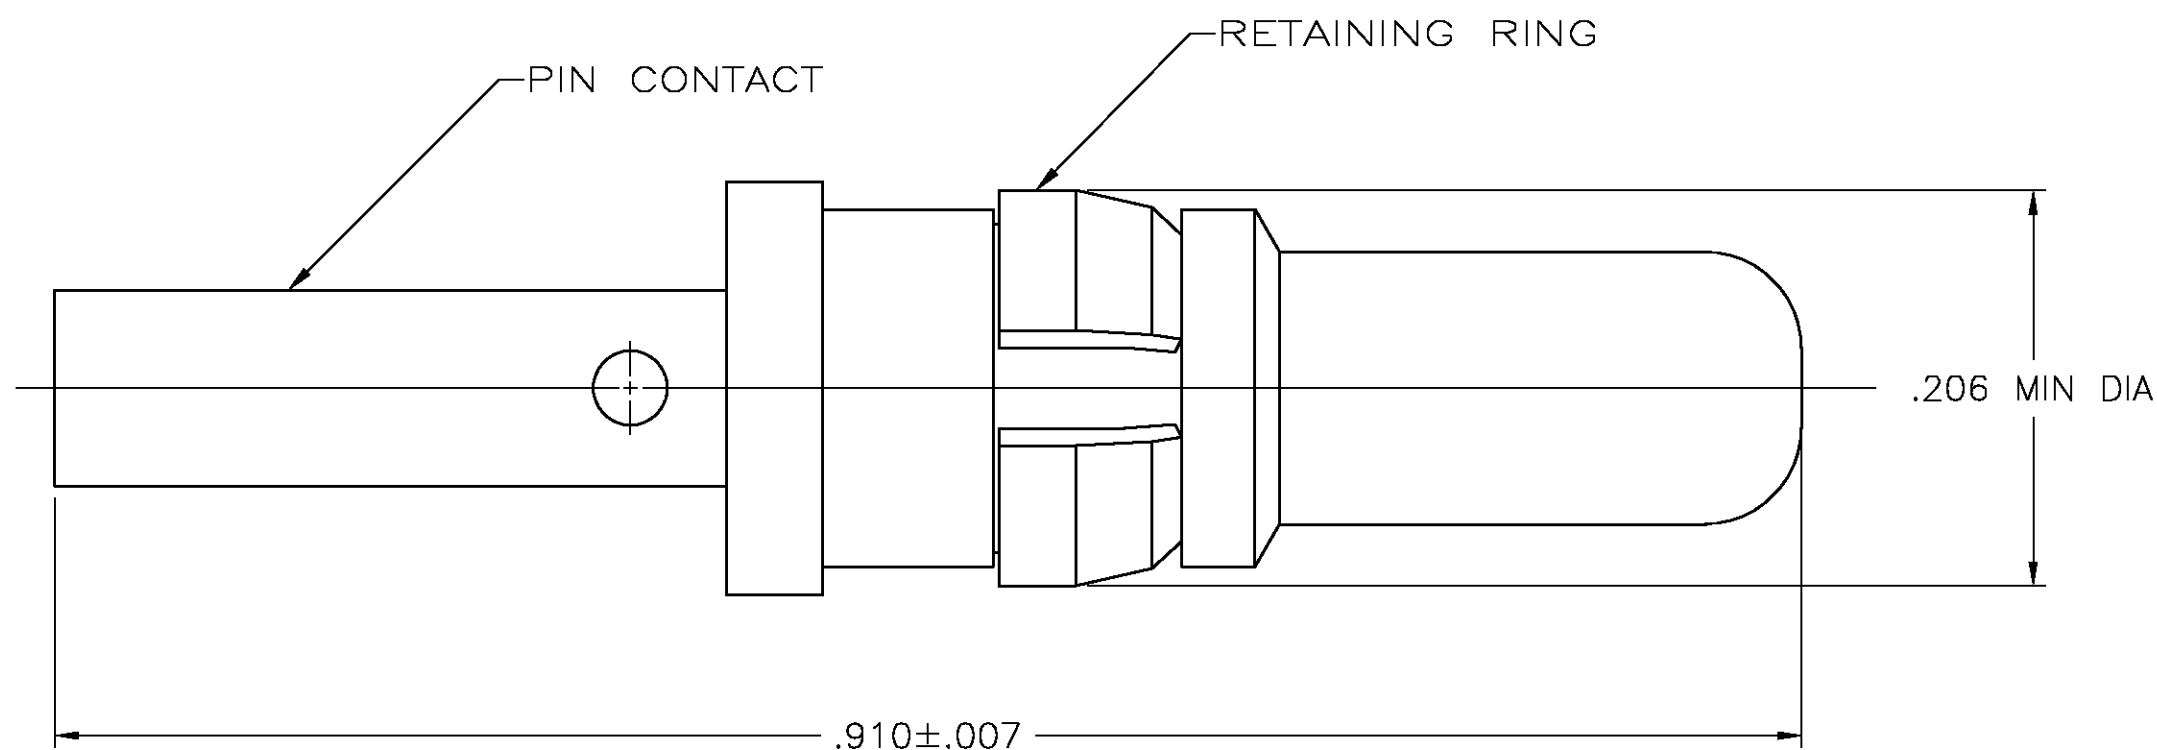

213567-1

PART NUMBER

1. WIRE BARREL WILL ACCEPT 16-18 AWG WIRE.




PIN CONTACT: BRASS.

RING RETAINING: PHOSPHOR BRONZE.

0.76μm [.000030] MIN GOLD OVER
1.27μm [.000050] MIN NICKEL.

1.27μm [.000050] MIN NICKEL.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHESTOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL



FINISH

PIN CONTACT: 3

RING RETAINING: 4

DWN
C DORWART

09/06/91

CHK
R STONE

9/10/91

APVD
A TRAVIS

9/11/91

PRODUCT SPEC
W PARKER

9/11/91

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics Corporation
Harrisburg, PA 17105

NAME

PIN CONTACT ASSEMBLY,
POWER VIII, METRIMATE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-213567

SCALE 10:1

SHEET

1

OF

1

REV

D