


EVA-M8

u-blox M8 concurrent GNSS modules

Data Sheet



Abstract

Technical data sheet describing the EVA-M8 module family which provides concurrent reception of up to 3 GNSS (GPS, Galileo, GLONASS, BeiDou). EVA-M8 is a highly integrated module in a 7x7 mm package.

Document Information

| | | |
|--------------------------|-----------------------------------|-------------|
| Title | EVA-M8 | |
| Subtitle | u-blox M8 concurrent GNSS modules | |
| Document type | Data Sheet | |
| Document number | UBX-16014189 | |
| Revision and date | R05 | 10-May-2019 |
| Document status | Production Information | |

| Product status | Corresponding content status | |
|--------------------------------------|-------------------------------------|--|
| In Development / Prototype | Objective Specification | Target values. Revised and supplementary data will be published later. |
| Engineering Sample | Advance Information | Data based on early testing. Revised and supplementary data will be published later. |
| Initial Production | Early Production Information | Data from product verification. Revised and supplementary data may be published later. |
| Mass Production / End of Life | Production Information | Document contains the final product specification. |

This document applies to the following products:

| Product name | Type number | ROM/FLASH version | PCN / IN reference |
|---------------------|--------------------|----------------------------------|---------------------------|
| EVA-M8M | EVA-M8M-0-10 | ROM SPG 3.01 / Flash FW SPG 3.01 | UBX-16012546 |
| EVA-M8M | EVA-M8M-1-10 | ROM SPG 3.01 / Flash FW SPG 3.01 | UBX-16012546 |
| EVA-M8Q | EVA-M8Q-0-10 | ROM SPG 3.01 / Flash FW SPG 3.01 | N/A |

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, modification or disclosure to third parties of this document or any part thereof is only permitted with the express written permission of u-blox.

The information contained herein is provided "as is" and u-blox assumes no liability for its use. No warranty, either express or implied, is given, including but not limited to, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by u-blox at any time without notice. For the most recent documents, visit www.u-blox.com.

Copyright © u-blox AG.

Contents

| | |
|--|----------|
| Document Information | 2 |
| Contents | 3 |
| 1 Functional description | 6 |
| 1.1 Overview | 6 |
| 1.2 Product features | 6 |
| 1.3 Performance | 7 |
| 1.4 Block diagram | 8 |
| 1.5 Supported GNSS constellations | 8 |
| 1.5.1 GPS | 9 |
| 1.5.2 GLONASS | 9 |
| 1.5.3 BeiDou | 9 |
| 1.5.4 Galileo | 9 |
| 1.6 Assisted GNSS (A-GNSS) | 10 |
| 1.6.1 AssistNow™ Online | 10 |
| 1.6.2 AssistNow™ Offline | 10 |
| 1.6.3 AssistNow™ Autonomous | 10 |
| 1.7 Augmentation Systems | 11 |
| 1.7.1 Satellite-Based Augmentation System (SBAS) | 11 |
| 1.7.2 QZSS | 11 |
| 1.7.3 IMES | 11 |
| 1.7.4 Differential GPS (D-GPS) | 11 |
| 1.8 Broadcast navigation data and satellite signal measurement | 11 |
| 1.9 Odometer | 12 |
| 1.10 Data logging | 12 |
| 1.11 Geofencing | 12 |
| 1.12 Message Integrity Protection | 12 |
| 1.12.1 Spoofing detection | 12 |
| 1.13 EXTINT: External interrupt | 12 |
| 1.13.1 Pin control | 13 |
| 1.13.2 Aiding | 13 |
| 1.14 TIMEPULSE | 13 |
| 1.15 Protocols and interfaces | 13 |
| 1.16 Interfaces | 13 |
| 1.16.1 UART | 13 |
| 1.16.2 USB | 13 |
| 1.16.3 SPI | 14 |
| 1.16.4 Display Data Channel (DDC) | 14 |
| 1.16.5 Serial Quad Interface (SQI) | 14 |
| 1.16.6 Interface selection (D_SEL) | 14 |
| 1.17 Configurable Input Output pins | 14 |

| | |
|---|-----------|
| 1.18 Safe Boot Mode | 15 |
| 1.19 System reset..... | 15 |
| 1.20 Clock generation..... | 15 |
| 1.20.1 Oscillators | 15 |
| 1.20.2 Real-Time Clock (RTC)..... | 15 |
| 1.21 Power Management | 15 |
| 1.21.1 DC-DC converter | 16 |
| 1.21.2 Power Mode Setup..... | 16 |
| 1.21.3 Continuous Mode..... | 16 |
| 1.21.4 Power Save Mode..... | 16 |
| 1.22 Antenna..... | 17 |
| 1.22.1 Active antenna control (ANT_OFF)..... | 17 |
| 1.22.2 Active Antenna supervisor and short circuit detection..... | 17 |
| 2 Pin definition | 18 |
| 2.1 Pin assignment..... | 18 |
| 2.2 Pin name changes..... | 20 |
| 3 Electrical specification | 21 |
| 3.1 Absolute maximum rating..... | 21 |
| 3.2 Operating conditions..... | 21 |
| 3.2.1 DC electrical characteristic | 22 |
| 3.2.2 Baseband parameters | 23 |
| 3.3 Indicative power requirements..... | 23 |
| 3.4 SPI timing diagrams | 24 |
| 3.4.1 Timing recommendations..... | 24 |
| 3.5 DCC timing diagrams | 24 |
| 4 Mechanical specification | 25 |
| 5 Reliability tests and approvals..... | 26 |
| 5.1 Reliability tests..... | 26 |
| 5.2 Approvals..... | 26 |
| 6 Product handling..... | 27 |
| 6.1 Packaging | 27 |
| 6.1.1 Reels | 27 |
| 6.1.2 Tapes..... | 27 |
| 6.2 Shipment, storage and handling | 28 |
| 6.3 Moisture Sensitivity Levels..... | 28 |
| 6.4 Reflow soldering | 28 |
| 6.5 ESD handling precautions..... | 28 |
| 7 Default messages | 29 |
| 8 Labeling and ordering information | 30 |
| 8.1 Product labeling..... | 30 |
| 8.2 Explanation of product codes..... | 30 |
| 8.3 Ordering codes..... | 30 |

| | |
|--------------------------------|-----------|
| Appendix | 31 |
| A Glossary | 31 |
| Related documents | 32 |
| Revision history | 32 |
| Contact..... | 33 |

1 Functional description

1.1 Overview

The EVA-M8M/Q GNSS modules feature the exceptional performance of the u-blox M8 concurrent positioning engine (receiving GPS, GLONASS, Galileo, BeiDou, QZSS and SBAS signals). The EVA-M8M/Q modules deliver high sensitivity and minimal acquisition times in the ultra-compact EVA form factor.

The EVA-M8M/Q series is an ideal solution for cost and space-sensitive applications. It is easy to design in, only requiring an external GNSS antenna in most applications. The layout of the EVA-M8M/Q series is especially designed to ease the customer's design and limit near field interferences since RF and digital domains are kept separate.

The EVA-M8M series uses a crystal oscillator for lower system costs, while EVA-M8Q with TCXO provides best performance. Like other u-blox GNSS modules, the EVA-M8M/Q modules use components selected for functioning reliably in the field over the full operating temperature range. In addition, EVA-M8M/Q provides an SPI interface for optional external FLASH, for future firmware upgrades and improved A-GNSS performance. The EVA-M8M/Q modules support message integrity protection, geo-fencing, and spoofing detection.

With a dual-frequency RF front-end, the u-blox M8 concurrent GNSS engine is able to intelligently use the highest number of visible satellites from three GNSS (GPS and Galileo, together with GLONASS or BeiDou) systems for reliable positioning.

The EVA-M8M/Q can be easily integrated in manufacturing, thanks to the QFN-like package. The modules are available in 500 pieces/reel, ideal for small production batches. The modules combine a high level of integration capability with flexible connectivity options in a miniature package. This makes the EVA-M8M/Q modules perfectly suited for small size and cost-sensitive industrial and wearable devices. The DDC (I2C compliant) interface provides connectivity and enables synergies with u-blox cellular modules.

The EVA-M8M/Q modules are qualified as stipulated in the JESD47 standard.

1.2 Product features

| Model | Category | GNSS | | | | | Supply | Interfaces | | | | Features | | | | | Grade |
|---------|--|--|---------------------------|--|--|---------------------------------|--|--|----|---|---|----------|---|--|--|--|-------|
| | Standard Precision GNSS High Precision GNSS Dead Reckoning Timing | GPS / QZSS GLONASS Galileo BeiDou | Number of concurrent GNSS | | | 1.65 V – 3.6 V 2.7 V – 3.6 V | UART USB SPI DDC (I ² C compliant) | Programmable (flash) Data logging Additional SAW Additional LNA RTC crystal Oscillator Built-in antenna Built-in antenna supply and supervisor Timepulse | | | | | | Standard Professional Automotive | | | |
| EVA-M8M | ● | ● ● ● ● | 3 | | | ● | ● ● ● ● | FF | FF | ◆ | C | 1 | ● | | | | |
| EVA-M8Q | ● | ● ● ● ● | 3 | | | ● | ● ● ● ● | FF | FF | ◆ | T | 1 | ● | | | | |

♦ = Optional, or requires external components

E = External flash required

C = Crystal / T = TCXO

1.3 Performance

| Parameter | Specification | | | | | |
|---|--|---------------|---------------------------------|----------|----------|------------------|
| Receiver type | 72-channel u-blox M8 engine GPS/QZSS L1C/A, GLONASS L1OF, BeiDou B1I, Galileo E1B/C, SBAS L1C/A: WAAS, EGNOS, MSAS, GAGAN | | | | | |
| Accuracy of time pulse signal | RMS | 30 ns | | | | |
| | 99% | 60 ns | | | | |
| Frequency of time pulse signal | | | 0.25 Hz...10 MHz (configurable) | | | |
| Operational limits ¹ | Dynamics | ≤ 4 g | | | | |
| | Altitude | 50,000 m | | | | |
| | Velocity | 500 m/s | | | | |
| Velocity accuracy ² | | | 0.05 m/s | | | |
| Heading accuracy ² | | | 0.3 degrees | | | |
| GNSS | | GPS & GLONASS | GPS | GLONASS | BeiDou | Galileo |
| Horizontal position accuracy ³ | | 2.5 m | 2.5 m | 4.0 m | 3.0 m | TBC ⁴ |
| Max navigation update rate | ROM | 10 Hz | 18 Hz | 18 Hz | 18 Hz | 18 Hz |
| | FLASH | 5 Hz | 10 Hz | 10 Hz | 10 Hz | 10 Hz |
| EVA-M8Q | | | | | | |
| Time-To-First-Fix ⁵ | Cold Start | 26 s | 29 s | 30 s | 34 s | 45 s |
| | Hot Start | 1 s | 1 s | 1 s | 1 s | 1 s |
| | Aided Start ⁶ | 2 s | 2 s | 2 s | 3 s | 7 s |
| Sensitivity ⁷ | Tracking & Navigation | -167 dBm | -166 dBm | -166 dBm | -160 dBm | -159 dBm |
| | Reacquisition | -160 dBm | -160 dBm | -156 dBm | -157 dBm | -153 dBm |
| | Cold Start | -148 dBm | -148 dBm | -145 dBm | -143 dBm | -138 dBm |
| | Hot Start | -157 dBm | -157 dBm | -156 dBm | -155 dBm | -151 dBm |
| EVA-M8M | | | | | | |
| Time-To-First-Fix ⁵ | Cold Start | 26 s | 30 s | 31 s | 39 s | 57 s |
| | Hot start | 1 s | 1 s | 1 s | 1 s | 1 s |
| | Aided starts ⁶ | 3 s | 3 s | 3 s | 7 s | 7 s |
| Sensitivity ⁷ | Tracking & Navigation | -164 dBm | -164 dBm | -163 dBm | -160 dBm | -154 dBm |
| | Reacquisition | -160 dBm | -159 dBm | -156 dBm | -155 dBm | -152 dBm |
| | Cold start | -148 dBm | -147 dBm | -145 dBm | -143 dBm | -133 dBm |
| | Hot start | -157 dBm | -156 dBm | -155 dBm | -155 dBm | -151 dBm |

Table 1: EVA-M8M/Q performance in different GNSS modes (default: concurrent reception of GPS & GLONASS incl. QZSS, SBAS)

¹ Assuming Airborne < 4 g platform

² 50% @ 30 m/s

³ CEP, 50%, 24 hours static, -130 dBm, > 6 SVs

⁴ To be confirmed when Galileo reaches full operational capability

⁵ All satellites at -130 dBm, except Galileo at -127 dBm

⁶ Dependent on aiding data connection speed and latency

⁷ Demonstrated with a good external LNA

1.4 Block diagram

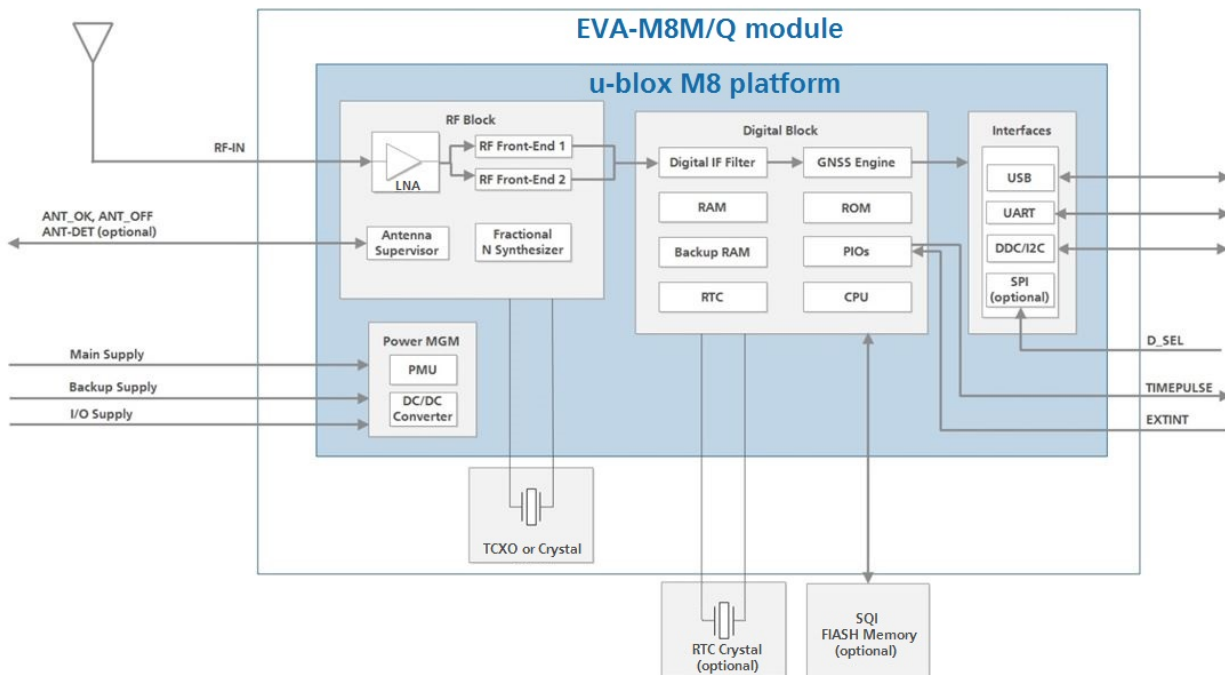


Figure 1: EVA-M8M/Q block diagram

1.5 Supported GNSS constellations

The EVA-M8M/Q modules are concurrent GNSS receivers and can receive and track multiple GNSS systems (GPS, GLONASS, Galileo, BeiDou and QZSS signals). Owing to the dual-frequency RF front-end architecture, either GLONASS or BeiDou can be processed concurrently with GPS and Galileo signals, providing reception of three GNSS systems.




The EVA-M8M series has two variants: EVA-M8M-0 (default: concurrent GPS/QZSS/SBAS and GLONASS) and EVA-M8M-1 (default: concurrent GPS/QZSS/SBAS and BeiDou).

If power consumption is a key factor, then the EVA-M8M/Q should be configured for single GNSS operation using GPS or GLONASS or BeiDou and disabling QZSS and SBAS.

The module can be configured to receive any single GNSS constellation or any of the set of permissible combinations shown below

| GPS | Galileo | GLONASS | BeiDou |
|-----|---------|---------|--------|
| • | • | – | – |
| • | • | • | – |
| • | • | – | • |
| • | – | • | – |
| • | – | – | • |
| – | • | • | – |
| – | • | – | • |
| – | – | • | • |

Table 2: Permissible GNSS combinations (• = enabled)

-  The augmentation systems: SBAS and QZSS can be enabled only if GPS operation is configured. QZSS should be enabled whenever GPS operation is configured.
-  Galileo is not enabled as the default configuration.
-  When the EVA-M8M-1 variant is attached with an external SPI flash without running flash firmware, the default concurrent reception of GPS/QZSS/SBAS and BeiDou remains unchanged. If the flash is also used for execution of firmware update, the default reception will be reset to GPS/QZSS/SBAS and GLONASS. See the EVA-8M / EVA-M8 Hardware Integration Manual [1] for more information on how to preset default concurrent reception of GPS/QZSS/SBAS and BeiDou.

1.5.1 GPS

The EVA-M8M/Q positioning modules are designed to receive and track the L1C/A signals provided at 1575.42 MHz by the Global Positioning System (GPS).

1.5.2 GLONASS

The EVA-M8M/Q modules can receive and process the GLONASS satellite system as an alternative to the US-based Global Positioning System (GPS). The u-blox EVA-M8M/Q series is designed to receive and track the L1OF signals GLONASS provided at $1602 \text{ MHz} + k \cdot 562.5 \text{ kHz}$, where k is the satellite's frequency channel number ($k = -7, \dots, 5, 6$). The ability to receive and track GLONASS L1OF satellite signals allows design of GLONASS receivers where required by regulations.



To take advantage of GPS and GLONASS, dedicated hardware preparation must be made during the design-in phase. See the EVA-8M / EVA-M8 Hardware Integration Manual [1] for u-blox design recommendations.

1.5.3 BeiDou

The EVA-M8M/Q modules can receive and process the B1I signals broadcast at 1561.098 MHz from the BeiDou Navigation Satellite System. The ability to receive and track BeiDou B1 satellite signals in conjunction with another constellation results in higher coverage, improved reliability and better accuracy. Currently, BeiDou is not fully operational globally and provides Chinese regional coverage only. Global coverage is scheduled for 2020.

1.5.4 Galileo

The EVA-M8M/Q positioning modules can receive and track the E1-B/C signals centered on the GPS L1 frequency band. GPS and Galileo signals can be processed concurrently together with BeiDou or GLONASS signals, enhancing coverage, reliability and accuracy. The SAR return link message (RLM) parameters for both short and long versions are decoded by the receiver and made available to users via UBX proprietary messages.

-  Galileo has been implemented according to ICD release 1.3 (December 2016). Since the Galileo satellite system has only recently reached Initial Services (IS) and not yet at Full Operational Capability (FOC), changes to the Galileo signal specification (OS SIS ICD) remain theoretically possible. u-blox therefore recommends to use Flash memory in designs utilizing Galileo signals in order to allow for a firmware update in the unlikely event of a change to the Galileo signal specification (OS SIS ICD).
-  Galileo reception is by default disabled, but can be enabled by sending a configuration message (UBX-CFG-GNSS) to the receiver. See the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [2] for more information.

1.6 Assisted GNSS (A-GNSS)

Supply of GNSS receiver assistance information, such as ephemeris, almanac, rough user position and time, will reduce the time to first fix significantly and improve acquisition sensitivity. EVA-M8M and EVA-M8Q modules support the u-blox AssistNow Online and AssistNow Offline A-GNSS services, support AssistNow Autonomous, and are OMA SUPL compliant.

1.6.1 AssistNow™ Online

With AssistNow Online, an Internet connected host downloads assistance data from the u-blox AssistNow Online service to the receiver at system start-up. The Multi-GNSS Assistance (MGA) service is an HTTP protocol based network operator independent service.

Supplying assistance information, such as ephemeris, almanac, a rough last position and time, can reduce the time to first fix significantly and improve acquisition sensitivity.



The AssistNow Online service provides data for GPS, GLONASS, BeiDou, Galileo and QZSS.

1.6.2 AssistNow™ Offline

With the AssistNow Offline service, users can download long-term orbit data over the Internet at their convenience. The orbit data can be stored in the GNSS receiver's SQL flash memory or alternatively within the memory of the application processor. The function requires no connectivity at system start-up, enabling a position fix within seconds, even when no network is available. AssistNow Offline offers augmentation for up to 35 days.



AssistNow Offline service provides data for GPS and GLONASS only, BeiDou and Galileo are not currently supported

1.6.3 AssistNow™ Autonomous

AssistNow Autonomous provides aiding information without the need for a host or external network connection. Based on previous broadcast satellite ephemeris data downloaded to and stored by the GNSS receiver, AssistNow Autonomous automatically generates accurate predictions of satellite orbital data ("AssistNow Autonomous data") that is usable for future GNSS position fixes. The concept capitalizes on the periodic nature of GNSS satellites; by capturing strategic ephemeris data at specific times of the day, the receiver can predict accurate satellite ephemeris for up to six days after initial reception.

The benefits of the u-blox AssistNow Autonomous feature are:

- Faster fix in situations where GNSS satellite signals are weak
- No connectivity required
- Compatible with AssistNow Online (can work stand-alone, or in tandem with the AssistNow Online service)
- No integration effort; calculations are done in the background, transparent to the user.




For best AssistNow Autonomous performance and data storage, the use of an SQL flash memory is recommended for EVA-M8M/Q modules, otherwise only GPS satellites are used and the prediction time decreases to three days.

1.7 Augmentation Systems

1.7.1 Satellite-Based Augmentation System (SBAS)

u-blox EVA-M8M/Q positioning modules support SBAS. These systems supplement GNSS data with additional regional or wide area GPS augmentation data. The system broadcasts range correction and integrity information via satellite which can be used by GNSS receivers to improve resulting precision. SBAS satellites can be used as additional satellites for ranging (navigation), further enhancing availability. The following SBAS types are supported: GAGAN, WAAS, EGNOS and MSAS.

 For more details, see the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [2].


1.7.2 QZSS

The Quasi-Zenith Satellite System (QZSS) is a regional navigation satellite system that transmits additional GPS L1 C/A signals for the Pacific region covering Japan and Australia. EVA-M8M/Q positioning module is able to receive and track these signals concurrently with GPS signals, resulting in better availability especially under challenging signal conditions, e.g. in urban canyons. The L1-SAIF signal provided by QZSS can be enabled for reception via a GNSS configuration message

1.7.3 IMES

The Japanese Indoor MESSaging System (IMES) system is used for indoor position reporting using low-power transmitters which broadcast a GPS-like signal. EVA-M8M/Q module can be configured to receive and demodulate the signal to provide an in-door location estimate.

 This service is authorized and available only in Japan.


 IMES reception is disabled by default


1.7.4 Differential GPS (D-GPS)

u-blox EVA-M8M/Q modules support Differential-GPS data according to RTCM 10402.3 [4]. The use of Differential-GPS data improves GPS position accuracy. The RTCM implementation supports the following RTCM 2.3 messages:

| Message Type | Description |
|--------------|------------------------------------|
| 1 | Differential GPS Corrections |
| 2 | Delta Differential GPS Corrections |
| 3 | GPS Reference Station Parameters |
| 9 | GPS Partial Correction Set |

Table 3: Supported RTCM 2.3 messages

 RTCM correction cannot be used together with SBAS.


 For more information, see the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [2].

1.8 Broadcast navigation data and satellite signal measurement

The EVA-M8M/Q can output all the GNSS broadcast data upon reception from tracked satellites. This includes all the supported GNSS signals plus the augmentation services SBAS, QZSS and IMES. The receiver also makes available the tracked satellite signal information, i.e. raw code phase and Doppler measurements in a form aligned to the Radio Resource LCS Protocol (RRLP) [6]. For more information, see the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [2].


1.9 Odometer

The odometer function provides information on travelled ground distance (in meters) based on the position and Doppler-based velocity output from the navigation solution. For each computed distance since the last odometer reset, the odometer estimates a 1-sigma accuracy value. The total cumulative ground distance is maintained and saved in the BBR memory.

 The odometer feature is disabled by default. For more information, see the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [2].

1.10 Data logging

The EVA-M8M/Q modules can be used in data logging applications if external flash is use. The data logging feature enables continuous storage of position, velocity and time information to an onboard SQL flash memory (at least 16 Mbit).It can also log the distance from the odometer. The information can be downloaded from the receiver later for further analysis or for conversion to a mapping tool.

 For more information, see the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [2].

1.11 Geofencing

The u-blox EVA-M8M/Q modules support up to four circular Geofencing areas defined on the earth's surface using a 2D model. Geofencing is active when at least one geofence is defined, the current status can be found by polling the receiver. A GPIO pin can be nominated to indicate status to e.g. wake up a host on activation.

1.12 Message Integrity Protection

The EVA-M8M/Q modules provide a function to detect third party interference with the UBX message steam sent from receiver to host. The security mechanism 'signs' nominated messages via a subsequent UBX message. This message signature is then compared with one generated by the host to determine if the message data has been altered. The signature algorithm seed can use one fixed secret ID key set by eFuse in production and a dynamic ID key set by the host, enabling users to detect 'man-in-the-middle' style attacks.

1.12.1 Spoofing detection

Spoofing is a process whereby a malicious third party tries to control the reported position via a 'fake' GNSS broadcast signal. This may result in the form of reporting incorrect position, velocity or time. To combat against this, the EVA-M8M/Q modules include spoofing detection measures to alert the host when signals appear to be suspicious. The receiver combines a number of checks on the received signals looking for inconsistencies across several parameters.

 This feature does not guarantee to detect all spoofing attacks.

1.13 EXTINT: External interrupt

EXTINT is an external interrupt pin with fixed input voltage thresholds with respect to **VCC_IO**. It can be used for control of the receiver or for aiding.

For more information about how to implement and configure these features, see the u-blox 8 / u-blox M8 Receiver Description including Protocol Specification [2] and the EVA-8M / EVA-M8 Hardware Integration Manual [1].

1.13.1 Pin control

The pin control feature allows overriding the automatic active/inactive cycle of Power Save Mode. The state of the receiver can be controlled through the **EXTINT** pin.

The receiver can also be forced OFF using **EXTINT** when Power Save Mode is not active.

1.13.2 Aiding

The **EXTINT** pin can be used to supply time or frequency aiding data to the receiver.

For time aiding, the time can be supplied using hardware time synchronization where an accurate time pulse is connected to the **EXTINT** pin.

Frequency aiding can be implemented by connecting a periodic rectangular signal with a frequency up to 500 kHz and arbitrary duty cycle (low/high phase duration must not be shorter than 50 ns) to the **EXTINT** pin, and providing the applied frequency value to the receiver using UBX messages.

1.14 TIMEPULSE

A configurable time pulse signal is available with u-blox EVA-M8M/Q series modules.

The TIMEPULSE output generates pulse trains synchronized with GPS or UTC time grid with intervals configurable over a wide frequency range. Thus it may be used as a low frequency time synchronization pulse or as a high frequency reference signal.

By default the time pulse signal is configured to 1 pulse per second. For more information, see the u-blox 8 / u-blox M8 Receiver Description including Protocol Specification [2].

1.15 Protocols and interfaces

| Protocol | Type |
|---|--|
| NMEA 0183, version 4.0 (V2.3 or V4.1 configurable) | Input/output, ASCII, |
| UBX | Input/output, binary, u-blox proprietary |
| RTCM | Input, messages 1, 2, 3, 9 |

Table 4: Available Protocols


All protocols are available on UART, USB, DDC (I²C compliant) and SPI. For specification of the various protocols, see the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [2].

1.16 Interfaces

A number of interfaces are provided either for data communication or memory access. The embedded firmware uses these interfaces according to their respective protocol specifications.

1.16.1 UART

The EVA-M8M/Q modules make use of a UART interface, which can be used for communication to a host. It supports configurable baud rates. For supported transfer rates, see the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [2].

 Designs must allow access to the UART and the **SAFEBOOT_N** pin for future service, updates and reconfiguration.

1.16.2 USB

A USB interface, which is compatible to USB version 2.0 FS (Full Speed, 12 Mbit/s), can be used for communication as an alternative to the UART. The pull-up resistor on pin **USB_DP** is integrated to signal a full-speed device to the host. The **VDD_USB** pin supplies the USB interface. The u-blox USB (CDC-ACM) driver supports Windows Vista plus Windows 7 and 8 operating systems. A separate

driver (CDC-ACM) is not required for Windows 10 which has a built-in USB-serial driver. However, plugging initially into an internet connected Windows 10 PC, will down-load the u-blox combined sensor and VCP driver package.

USB drivers can be down-loaded from the u-blox web site, www.u-blox.com.


1.16.3 SPI

The SPI interface is designed to allow communication to a host CPU. The interface can be operated in slave mode only. The maximum transfer rate using SPI is 125 kB/s and the maximum SPI clock frequency is 5.5 MHz. Note that SPI is not available in the default configuration, because its pins are shared with the UART and DDC interfaces. The SPI interface can be enabled by connecting **D_SEL** to ground (see section 1.17.6). In this case the DDC interface for data communication is not available.

1.16.4 Display Data Channel (DDC)

An I²C compliant DDC interface is available for communication with an external host CPU. The interface can be operated in slave mode only. The DDC protocol and electrical interface are fully compatible with Fast-Mode of the I²C industry standard. Since the maximum SCL clock frequency is 400 kHz, thus the maximum transfer rate is 400 kbit/s.

The DDC interface is I²C Fast Mode compliant. For timing parameters consult the I²C standard.

 The maximum bit rate is 400 kbit/s. The interface stretches the clock when slowed down while serving interrupts, so real bit rates may be slightly lower.

1.16.5 Serial Quad Interface (SQI)

An SQI is available in EVA-M8M/Q series for connecting the modules with an optional external flash memory. The flash memory is required for firmware updates and for data logging. In addition, it can be used to store configurations and to save AssistNow Offline and AssistNow Autonomous data.

 For more information, see the EVA-8M / EVA-M8 Hardware Integration Manual [1].

1.16.6 Interface selection (D_SEL)

At startup the **D_SEL** pin determines which data interfaces are used for communication. If **D_SEL** is set to logical “1” or is not connected, UART and DDC become available. If **D_SEL** is set to logical “0”, i.e. connected to GND, the EVA-M8M/Q modules can communicate to a host via SPI.

| Pin # | (D_SEL)=“1” (left open) | (D_SEL)=“0” (connected to GND) |
|-------|-------------------------|--------------------------------|
| 16 | UART TXD | SPI MISO |
| 15 | UART RXD | SPI MOSI |
| 29 | DDC SCL | SPI CLK |
| 30 | DDC SDA | SPI CS_N |

Table 5: Data interface selection by D_SEL

1.17 Configurable Input Output pins

Configuration settings can be modified for several Input/Output pins with either UBX configuration messages or pin selection. This flexible configuration options allow the receivers to be optimally configured for specific applications requirements. The modified settings remain either permanent or effective until power-down or reset depending on the case. Customer can activate or remap the following pins on EVA-M8M/Q series:


1. Selection of either DDC or UART TXD/RXD pins interface using **D_SEL** pin. See section 1.17.6.
2. Selection of antenna supervision pins. See section 1.23.
3. Selection of external interrupt pins. See section 1.14.

4. Configuration of Timepulse. See section [1.15](#).

 For more information, see the EVA-8M / EVA-M8 Hardware Integration Manual [\[1\]](#).

1.18 Safe Boot Mode

If Pin33 (**SAFEBOOT_N**) is set to logical “0” at startup, the EVA-M8M/Q receivers enter Safe Boot Mode. In this mode the receiver does not calculate positioning data, but is in a defined state that allows such actions as programming the flash memory in production, or recovering a corrupted flash memory.

 For more information about Safe Boot Mode, see the EVA-8M / EVA-M8 Hardware Integration Manual [\[1\]](#).

1.19 System reset

The EVA-M8M/Q series provides a **RESET_N** pin to reset the system and Real-Time Clock (RTC). The **RESET_N** pin should be only used in critical situations to recover the system.

1.20 Clock generation

1.20.1 Oscillators

The EVA-M8 GNSS modules are available in TCXO and crystal versions. EVA-M8M uses a 26 MHz crystal oscillator for lower system costs, while EVA-M8Q with TCXO provides best performance. Like other u-blox GNSS modules, the EVA-M8M/Q modules use components selected for functioning reliably in the field over the full operating temperature range.


1.20.2 Real-Time Clock (RTC)


The use of the RTC Clock may be optionally used to maintain time in the event of power failure at **VCC_IO**. The RTC is required for hot start, warm start, AssistNow Autonomous, AssistNow Offline and some Power Save Mode operations.


The use of the RTC is optional. The time information can be generated in one of these ways:

- by connecting to an external RTC crystal (for lower battery current – default mode)
- by sharing from another RTC oscillator used within the application (for lowest system costs and smallest size)

If the main supply voltage fails and a battery is connected to **V_BCKP**, parts of the baseband section switch off, but the RTC still runs, providing a timing reference for the receiver. This operating mode is called Hardware Backup Mode, which enables all relevant data to be saved in the backup RAM to later allow a hot or warm start.

 With EVA-M8M, RTC clock can be derived from the onboard 26 MHz crystal oscillator. For more information about crystal operation and configuration, see the EVA-8M / EVA-M8 Hardware Integration Manual [\[1\]](#).

 Deriving RTC clock from internal oscillator is not available on EVA-M8Q.

 If neither backup RAM nor RTC are used, the backup battery is not needed and **V_BCKP** should be connected to **VCC_IO**.

1.21 Power Management

u-blox M8 technology offers a power-optimized architecture with built-in autonomous power saving functions to minimize power consumption at any given time. Furthermore, the receiver can be used in two operating modes: Continuous mode for best performance or Power Save Mode for optimized

power consumption. In addition, a high efficiency DC/DC converter is integrated to allow low power consumption even for higher main supply voltages.

1.21.1 DC-DC converter

EVA-M8M/Q modules integrate a DC-DC converter, allowing reduced power consumption by up to 50%, especially when using a main supply voltage above 2.5 V.



For more information, see the EVA-8M / EVA-M8 Hardware Integration Manual [\[1\]](#).

1.21.2 Power Mode Setup

The EVA-M8M/Q modules can be configured to run in either continuous or a choice of Power Save mode configurations. A template of power mode settings can be used to easily select typical power mode setups to cover the majority of users' requirements.

For specific power saving applications, the user has the option to fully configure via the power save mode configuration. More information, see section [1.22.4](#).

The EVA-M8M/Q module's power mode setup offers a choice of continuous operation and preset Power Save Mode Configurations.

- Continuous (default) mode for best GNSS performance vs power consumption
- Continuous with no compromise in power consumption
- A 1 Hz cyclic tracking mode for aggressive power reduction
- Choice of 2 or 4 Hz⁸ cyclic tracking modes for typical wearable applications
- ON/OFF interval mode

1.21.3 Continuous Mode

Continuous Mode uses the acquisition engine at full performance resulting in the shortest possible TTFF and the highest sensitivity. It searches for all possible satellites until the Almanac is completely downloaded. The receiver then switches to the tracking engine to lower power consumption.

Thus, a lower tracking current consumption level will be achieved when:

- A valid GNSS position is obtained
- The entire Almanac has been downloaded
- The Ephemeris of each satellite in view is valid

1.21.4 Power Save Mode

For specific power saving applications outside the typical preset power mode setups, users can configure a tailored Power Save Mode.

Power Save Mode provides two dedicated methods, ON/OFF and Cyclic tracking, that reduce average current consumption in different ways to match the needs of the specific application. These operations can be set by using a specific UBX message.



For more information about power management strategies, see the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [\[2\]](#).

⁸ Single GNSS constellation configuration only

1.22 Antenna


The EVA-M8M/Q modules are designed for use with passive⁹ and active¹⁰ antennas.

| Parameter | Specification | |
|--------------------------------|----------------------------|--|
| Antenna Type | Passive and active antenna | EVA-M8M with passive antenna, an external LNA is mandatory . EVA-M8Q with passive antenna, an external LNA is recommended . |
| Active Antenna Recommendations | Minimum gain | 15 dB (to compensate signal loss in RF cable) |
| | Maximum gain | 50 dB |
| | Maximum noise figure | 2 dB |

Table 6: Antenna recommendations and specifications for EVA-M8M/Q modules

1.22.1 Active antenna control (ANT_OFF)

The **ANT_OFF** Pin can be used to turn on and off an external LNA or an active antenna. This reduces power consumption in Power Save Mode (Backup mode). This pin is available in EVA-M8M/Q modules.

 **ANT_OFF** pin polarity can be changed. For more information about active antenna control, see the EVA-8M / EVA-M8 Hardware Integration Manual [\[1\]](#).

1.22.2 Active Antenna supervisor and short circuit detection

An antenna supervisor is available with the EVA-M8M/Q modules and requires external components. The antenna supervisor enables the receiver to detect short circuits at the active antenna using the ANT_OFF and ANT_OK pins (activated per default) and to shut down the voltage bias immediately. The antenna supervisor can be extended to also detect condition of open circuit by activating the ANT_DET pin and including external components for antenna open circuit detection. UBX and NMEA messages are provided to report the condition of the antenna supply. Open circuit detection can also be supported.

 For more information, see the EVA-8M / EVA-M8 Hardware Integration Manual [\[1\]](#).

⁹ For integrating an EVA-M8 GNSS series module with a Cellular product, see the EVA-8M / EVA-M8 Hardware Integration Manual [\[1\]](#).

¹⁰ For information on using an active antenna with an EVA-M8 module, see the EVA-8M / EVA-M8M Hardware Integration Manual [\[1\]](#).

2 Pin definition

2.1 Pin assignment

This section shows the pin assignments. Most PIOs are configurable and have shared functions. Use special care when designing with these pins since the overall function of the device can be affected.

The default configuration of the PIOs is listed in [Table 7](#) below.

For more information, see the EVA-8M / EVA-M8 Hardware Integration Manual [\[1\]](#).

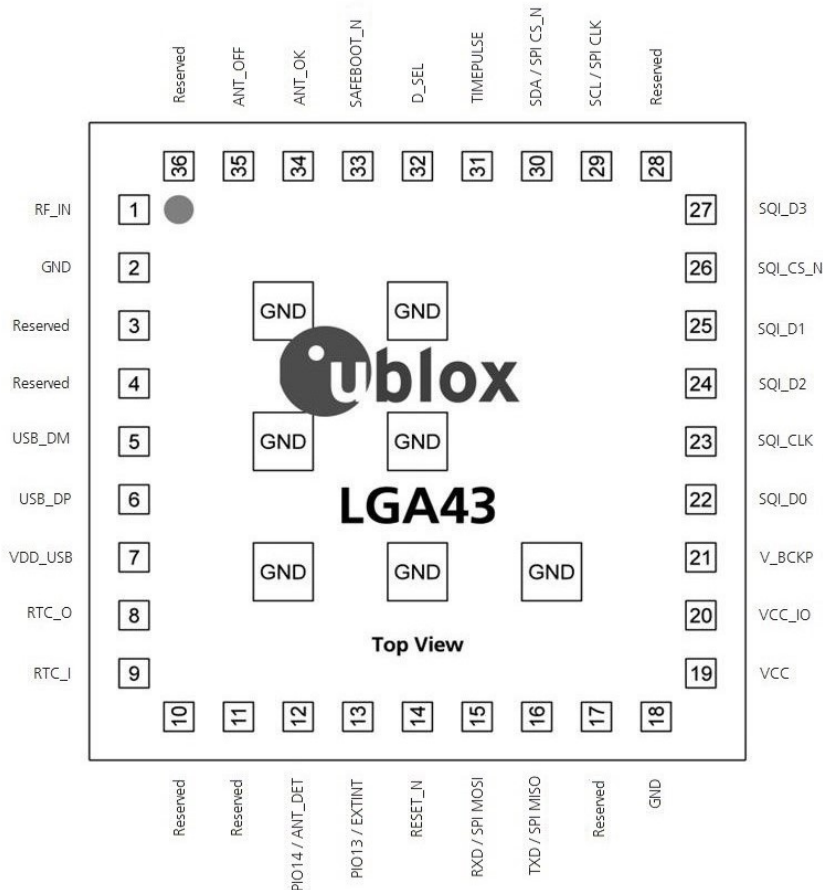


Figure 2: Pin assignment of EVA-M8M/Q

For multiple function PIOs, select the specific signal by sending the specific configuration message or by e-fusing.

| Pin # | Name | I/O | Description | Remark |
|-------|----------|-----|-------------|---|
| 1 | RF_IN | I | RF Input | Add external LNA and SAW if no active antenna used. |
| 2 | GND | I | Ground | |
| 3 | Reserved | I/O | Reserved | Do not connect. Must be left open! |
| 4 | Reserved | I/O | Reserved | Do not connect. Must be left open! |
| 5 | USB_DM | I/O | USB data | Leave open if not used. |

| Pin # | Name | I/O | Description | Remark |
|-------|-----------------|-----|---|--|
| 6 | USB_DP | I/O | USB data | Leave open if not used. |
| 7 | VDD_USB | I | USB Interface power | Connect to GND if not used. |
| 8 | RTC_O | O | RTC Output | Leave open if no RTC Crystal attached. |
| 9 | RTC_I | I | RTC Input | Connect to GND if no RTC Crystal attached. |
| 10 | Reserved | I/O | Reserved | Do not connect. Must be left open! |
| 11 | Reserved | I/O | Reserved | Do not connect. Must be left open! |
| 12 | PIO14 / ANT_DET | I | Antenna detection | Leave open if not used. |
| 13 | PIO13 / EXTINT | I | External interrupt | Leave open if not used. |
| 14 | RESET_N | I | System reset | See section 1.19. |
| 15 | RXD / SPI MOSI | I | Serial interface | See section 1.17.6. |
| 16 | TXD / SPI MISO | O | Serial interface | See section 1.17.6. |
| 17 | Reserved | I/O | Reserved | Do not connect. Must be left open! |
| 18 | GND | I | Ground | |
| 19 | VCC | I | Main supply | |
| 20 | VCC_IO | I | I/O Supply | |
| 21 | V_BCKP | I | Backup supply | |
| 22 | SQI_D0 | I/O | Data line 0 to external SQI flash memory or reserved configuration pin. | Leave open if not used. |
| 23 | SQI_CLK | I/O | Clock for external SQI flash memory or configuration pin. | Leave open if not used. |
| 24 | SQI_D2 | I/O | Data line 2 to external SQI flash memory or reserved configuration pin. | Leave open if not used. |
| 25 | SQI_D1 | I/O | Data line 1 to external SQI flash memory or reserved configuration pin. | Leave open if not used. |
| 26 | SQI_CS_N | I/O | Chip select for external SQI flash memory or configuration enable pin. | Leave open if not used. |
| 27 | SQI_D3 | I/O | Data line 3 to external SQI flash memory or reserved configuration pin. | Leave open if not used. |
| 28 | Reserved | I/O | Reserved | Do not connect. Must be left open! |
| 29 | SCL / SPI CLK | I | Serial interface | See section 1.17.6. |
| 30 | SDA / SPI CS_N | I/O | Serial interface | See section 1.17.6. |
| 31 | TIMEPULSE | O | Time pulse output | Leave open if not used. |
| 32 | D_SEL | I | Interface selector | See section 1.17.6. |
| 33 | SAFEBOOT_N | I | Used for programming the SQI flash memory and testing purposes. | Leave open if not used. |
| 34 | ANT_OK | I | Antenna status | Leave open if not used. |
| 35 | ANT_OFF | O | Antenna control | Leave open if not used. |
| 36 | Reserved | I/O | Reserved | Do not connect. Must be left open! |
| 37 | GND | I | Ground | Inner ground pins |
| 38 | GND | I | Ground | Inner ground pins |
| 39 | GND | I | Ground | Inner ground pins |
| 40 | GND | I | Ground | Inner ground pins |
| 41 | GND | I | Ground | Inner ground pins |
| 42 | GND | I | Ground | Inner ground pins |
| 43 | GND | I | Ground | Inner ground pins |

Table 7: EVA-M8M/Q pinout

2.2 Pin name changes

Selected pin names have been updated to agree with a common naming convention across u-blox modules. The pins have not changed their operation and are the same physical hardware but with updated names. The table below lists the pins that have changed name along with their old and new names.

| No | Previous Name | New name |
|----|---------------|----------------|
| 7 | V_USB | VDD_USB |
| 15 | RX / MOSI | RXD / SPI MOSI |
| 16 | TX / MISO | TXD / SPI MISO |
| 26 | SQI_CS | SQI_CS_N |
| 29 | SCL / SCK | SCL / SPI CLK |
| 30 | SDA / CS_N | SDA / SPI CS_N |

Table 8: Pin name changes

3 Electrical specification

- The limiting values given are in accordance with the EOS System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only, and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.
- Where application information is given, it is advisory only and does not form part of the specification. For more information regarding power management, see the EVA-8M / EVA-M8 Hardware Integration Manual [1].

3.1 Absolute maximum rating

| Parameter | Symbol | Module | Min | Max | Unit |
|---|--------------------|---------|------|--------------------------------------|------|
| Supply voltage | VCC | All | −0.5 | 3.6 | V |
| Supply voltage I/O ring | VCC_IO | All | −0.5 | 3.6 | V |
| Supply voltage USB | VDD_USB | All | −0.5 | 3.6 | V |
| Supply voltage baseband backup core | V_BCKP | All | −0.5 | 3.6 | V |
| Input voltage on RTC_I | V _{i RTC} | All | −0.5 | 1.6 | V |
| Input voltage on Configurable Inputs, RESET_N | V _{i DIG} | All | −0.5 | VCC_IO+0.5 3.6 if VCC_IO >= 3.1 V | V |
| RF Input power on RF_IN | Prfin | All | | +15 | dBm |
| Total power dissipation | P _{tot} | All | | 500 | mW |
| Storage temperature | T _s | EVA-M8M | −40 | +105 | °C |
| | | EVA-M8Q | −40 | +85 | °C |

Table 9: Absolute maximum ratings

- Stressing the device beyond the “Absolute Maximum Ratings” may cause permanent damage. These are stress ratings only. The product is not protected against overvoltage or reversed voltages. If necessary, voltage spikes exceeding the power supply voltage specification, given in table above, must be limited to values within the specified boundaries by using appropriate protection diodes.

3.2 Operating conditions


- The test conditions specified in Table 10 apply to all characteristics defined in this section.

| Symbol | Parameter | Min | Typical | Max | Unit | Remarks |
|-------------------|-------------------------------|-----|---------|-----|------|---------|
| T _{amb} | Ambient temperature | −40 | +25 | +85 | °C | |
| GND | Ground | | 0 | | V | |
| VCC | Core supply voltage | | 3.3 | | V | |
| V_BCKP | Backup battery supply voltage | | 3.3 | | V | |
| VCC_IO | Supply voltage I/O ring | | 3.3 | | V | |
| VDD_USB | Supply voltage USB | | 3.3 | | V | |
| NF _{tot} | Receiver Chain Noise Figure | | 5.0 | | dB | |

Table 10: Test conditions

- All specifications are at an ambient temperature of +25 °C. Extreme operating temperatures can significantly impact specification values. Applications operating near the temperature limits should be tested to ensure the specification.

3.2.1 DC electrical characteristic

 For Power Management Unit (PMU) block diagrams, see the EVA-8M / EVA-M8 Hardware Integration Manual [1].

| Symbol | Parameter | Module | Min | Typical | Max | Unit |
|---------|---|---------|------|---------|-----|------|
| VCC_IO | Supply voltage for PIOs and input voltage for LDO_B and LDO_X | EVA-M8M | 1.65 | 3.3 | 3.6 | V |
| | | EVA-M8Q | 2.7 | 3.3 | 3.6 | V |
| VDD_USB | Supply voltage USB | All | 3.0 | 3.3 | 3.6 | V |
| V_BCKP | Input voltage for LDO_B and LDO_X (backup mode) | All | 1.4 | | 3.6 | V |
| VCC | Input voltage | EVA-M8M | 1.65 | | 3.6 | V |
| | | EVA-M8Q | 2.7 | | 3.6 | V |

Table 11: Power supply pins

| Symbol | Parameter | Condition | Min | Typical | Max | Unit |
|--------|---|------------------------|------------|---------|------------|------|
| Ileak | Leakage current input pins | | | < 1 | | nA |
| Vil | Low level input voltage | | 0 | | 0.2*VCC_IO | V |
| Vih | High level input voltage | | 0.7*VCC_IO | | VCC_IO+0.5 | V |
| Vol | Low level output voltage for TXD/SPI MISO, RXD/SPI MOSI, SDA/SPI CS_N, SCL/SPI CLK, D_SEL, TIMEPULSE, PIO13/EXTINT, PIO14/ANT_DET, ANT_OK, ANT_OFF | I _{OL} = 4 mA | | | 0.4 | V |
| Voh | High level output voltage for TXD/SPI MISO, RXD/SPI MOSI, SDA/SPI CS_N, SCL/SPI CLK, D_SEL, TIMEPULSE, PIO13/EXTINT, PIO14/ANT_DET, ANT_OK, ANT_OFF | I _{OH} = 4 mA | VCC_IO-0.4 | | | V |
| Rpu | Pull-up resistor for SDA/SPI CS_N, SCL/SPI CLK, TIMEPULSE, PIO13/EXTINT, PIO14/ANT_DET, RESET_N | | | 11 | | kΩ |
| Rpu | Pull-up resistor for TXD/SPI MISO, RXD/SPI MOSI, D_SEL, ANT_OK, ANT_OFF | | | 115 | | kΩ |

Table 12: Digital IO pins

| Symbol | Parameter | Condition | Min. | Typ. | Max. | Unit |
|--------|-------------------------------------|---|------|------|---------|------|
| Ileak | Leakage current input pins | | | | 1 | μA |
| Vil | Low level input voltage | VDD_USB ≥ 3.0 V | 0 | | 0.8 | V |
| Vih | High level input voltage | VDD_USB ≥ 3.0 V | 2.0 | | VDD_USB | V |
| Vol | Low level output voltage | R _L = 1.425 kΩ to VDD_USB, VDD_USB ≥ 3.0 V, 27 Ω external series resistor | | | 0.3 | V |
| Voh | High level output voltage | R _L = 14.25 kΩ to GND, VDD_USB ≥ 3.0, 27 Ω external series resistor | 2.8 | | | V |
| Rpui | Pull-up resistor, Idle State | | 870 | 900 | 950 | Ω |
| Rpuo | Pull-up resistor, Operational State | | 1400 | 1490 | 1600 | Ω |

Table 13: USB pins


3.2.2 Baseband parameters

| Symbol | Parameter | Condition | Min. | Typ. | Max. | Unit |
|-------------|--|-------------|------|-------|------|------|
| RTC_Fxtal | RTC crystal resonant frequency | | | 32768 | | Hz |
| RTC_T_start | RTC startup time | | 0.2 | 0.35 | 0.9 | sec |
| RTC_Amp | 32768 Hz OSC oscillation amplitude | | 50 | | 350 | mVpp |
| RTC_ESR | 32768 Hz Xtal equivalent series resistance | | | | 100 | kΩ |
| RTC_CL | RTC integrated load capacitance | ESR = 80 kΩ | 4 | 7 | 12 | pF |

Table 14: Baseband parameters

3.3 Indicative power requirements

Table 15 lists examples of the total system supply current for a possible application.

 The values in Table 15 are provided for customer information only as an example of typical current requirements. The values are characterized on samples; actual power requirements can vary depending on FW version used, external circuitry, the number of SVs tracked, signal strength, type of start as well as time, duration and conditions of test.

| Parameter | Symbol | Conditions | Module | Typ GPS & GLONASS | Typ GPS / QZSS / SBAS | Max | Units |
|--------------------------------------|---|--|---------|-------------------------|--------------------------|-----|-------|
| Max. supply current ¹¹ | Iccp | | All | | | 67 | mA |
| Average supply current ¹² | Icc Acquisition ¹³ | VCC_IO = VCC = 3 V | EVA-M8M | 25 | 19 | | mA |
| | | | EVA-M8Q | 26 | 20 | | mA |
| | Icc Tracking (Continuous mode) | VCC_IO = VCC = 3 V | EVA-M8M | 22 | 17 | | mA |
| | | | EVA-M8Q | 23 | 18 | | mA |
| | Icc Tracking (Power Save mode / 1 Hz) | VCC_IO = VCC = 3 V | EVA-M8M | 5.3 | 4.7 | | mA |
| | | | EVA-M8Q | 6.2 | 5.7 | | mA |
| Backup battery current ¹⁴ | I_BCKP using the RTC crystal | HW Backup mode, VCC_IO = VCC = 0 V | All | 15 | | | μA |
| | I_BCKP using the 26 MHz XTO in "single crystal" operation | HW Backup mode, VCC_IO = VCC = 0 V | EVA-M8M | 100 | | | μA |
| SW Backup current | | | EVA-M8Q | N/A ¹⁵ | | | |
| | I_SWBCKP using the RTC crystal | SW Backup mode, VCC_IO = VCC = 3 V | All | 20 | | | μA |
| | I_SWBCKP using the 26 MHz XTO in "single crystal" operation | SW Backup mode, VCC_IO = VCC = 3 V | EVA-M8M | 105 | | | μA |
| | | | EVA-M8Q | N/A ¹⁵ | | | |

Table 15: Currents to calculate the indicative power requirements

¹¹ Use this figure to dimension maximum current capability of power supply. Measurement of this parameter with 1 Hz bandwidth.

¹² Simulated constellation of 8 satellites is used. All signals are at -130 dBm. VCC= 3 V

¹³ Average current from start-up until the first fix.

¹⁴ Use this figure to determine required battery capacity.

¹⁵ Not applicable, feature not supported

For more information about power requirements, see the EVA-8M / EVA-M8 Hardware Integration Manual [1].

- All values in Table 15 are measured at +25 °C ambient temperature.
- For more information on how to noticeably reduce current consumption, see the Power Management Application Note [5].

3.4 SPI timing diagrams

In order to avoid incorrect operation of the SPI, the user needs to comply with certain timing conditions. The following signals need to be considered for timing constraints:

| Symbol | Description |
|-----------------|---------------------|
| SPI CS_N (SS_N) | Slave select signal |
| SPI CLK (SCK) | Slave clock signal |

Table 16: Symbol description

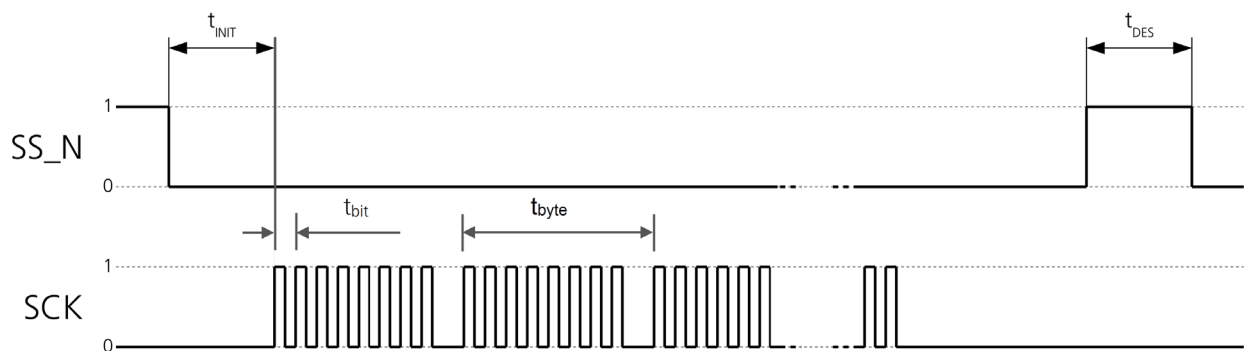


Figure 3: SPI timing diagram

3.4.1 Timing recommendations

The SPI timing recommendations are given below.

| Parameter | Description | Recommendation |
|------------|---------------------|--|
| t_{INIT} | Initialization Time | 10 μ s |
| t_{DES} | Deselect Time | 1 ms. |
| t_{bit} | Minimum bit time | 180 ns (5.5 MHz max bit frequency) |
| t_{byte} | Minimum byte period | 8 μ s (125 kHz max byte frequency) |

Table 17: SPI timing recommendations

- The values in the above table result from the requirement of an error-free transmission. By allowing just a few errors and disabling the glitch filter, the bit rate can be increased considerably.

3.5 DCC timing diagrams

The DDC interface is I²C Fast Mode compliant. For timing parameters consult the I²C standard.

- The maximum bit rate is 400 kbit/s. The interface stretches the clock when slowed down when serving interrupts, so real bit rates may be slightly lower.

4 Mechanical specification

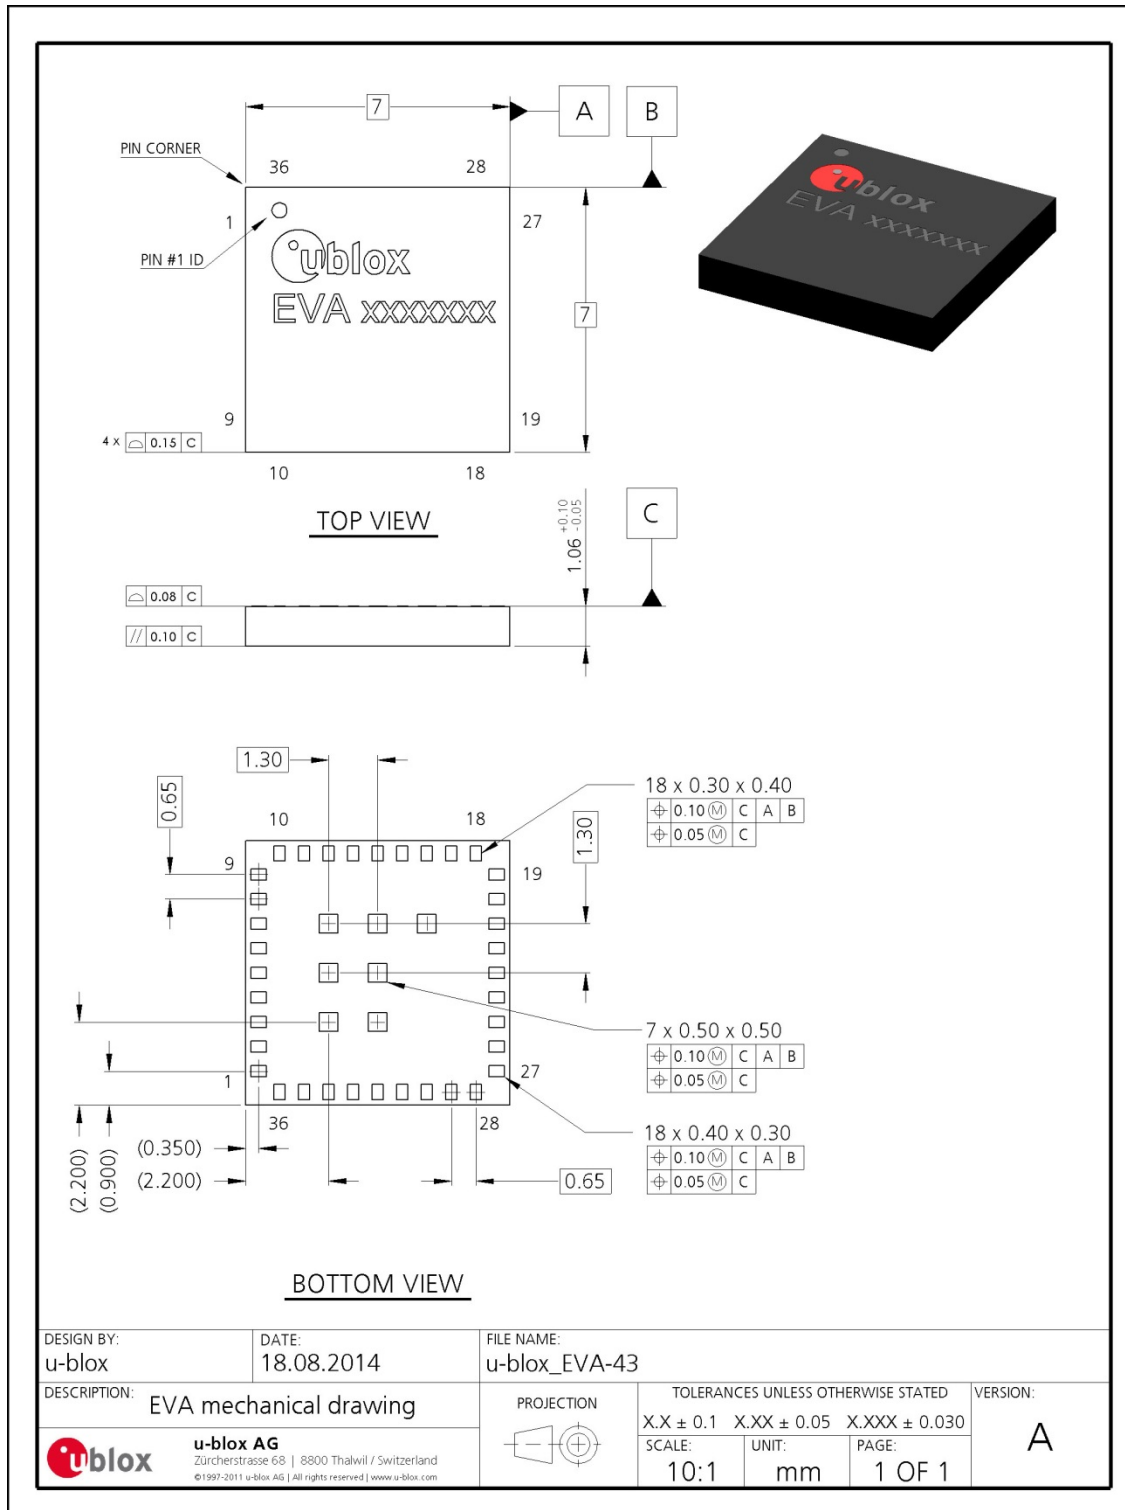


Figure 4: Mechanical drawing for EVA-M8M/Q (LGA43)

5 Reliability tests and approvals

5.1 Reliability tests

Qualification requirements according JEDEC standards JESD47 "Stress-Test-Driven Qualification of Integrated Circuits".

5.2 Approvals



The EVA-M8M and EVA-M8Q modules comply with the Directives 2011/65/EU and 2015/863/EU of the European Parliament and the Council on the Restriction of Use of certain Hazardous Substances (RoHS).

6 Product handling

6.1 Packaging

EVA-M8M/Q GNSS series modules are delivered as hermetically sealed, reeled tapes in order to enable efficient production, production lot set-up and tear-down. For more information about packaging, see the u-blox Package Information Guide [3].

6.1.1 Reels

EVA-M8M/Q GNSS series modules are deliverable in quantities of 500 pieces on a reel. The EVA-M8M/Q modules are shipped on Reel Type D, as described in the u-blox Package Information Guide [3].

6.1.2 Tapes

Figure 5 shows the feed direction and the orientation of the EVA-M8M/Q positioning modules on the tape. The positioning modules are placed such that the pin 1 is at the upper right for the LGA43. The dimensions of the tapes are specified in Figure 6.

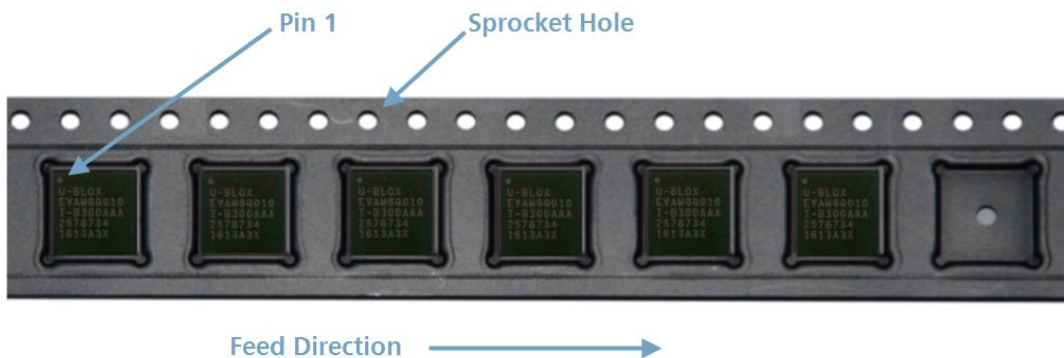


Figure 5: Orientation of EVA-M8Q modules on the tape

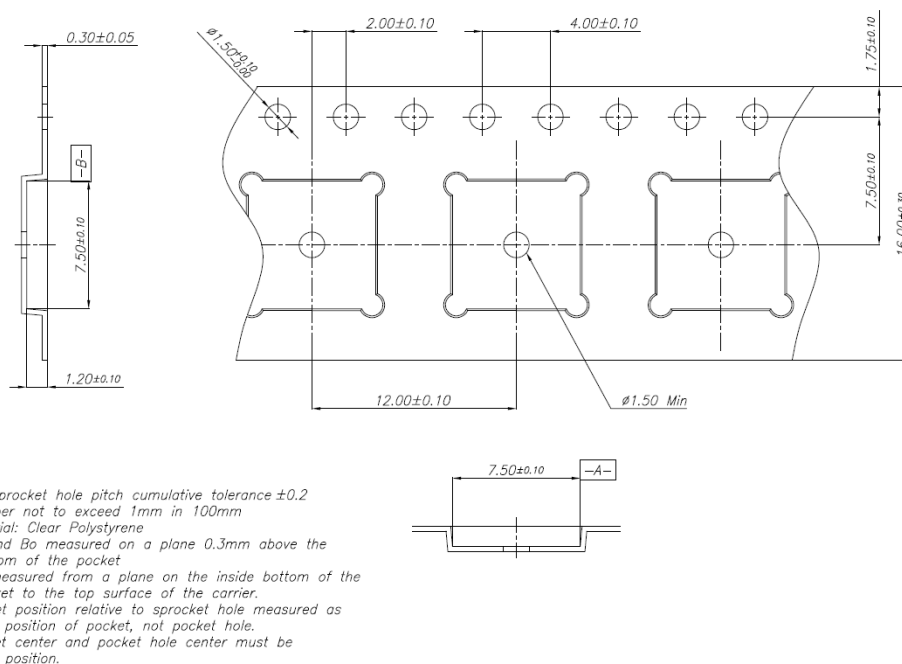



Figure 6: EVA-M8M/Q tape dimensions


6.2 Shipment, storage and handling

For important information regarding shipment, storage and handling see the u-blox Package Information Guide [3]. The absolute maximum rating of the storage temperature specified in section 3.1 apply to the storage of the module both before and after soldering. Required storage conditions for modules in reeled tapes and for naked modules before soldering are described in the u-blox Package Information Guide [3].

6.3 Moisture Sensitivity Levels

The Moisture Sensitivity Level (MSL) relates to the packaging and handling precautions required. EVA-M8M and EVA-M8Q¹⁶ modules are rated at MSL level 3.


 For MSL standard see IPC/JEDEC J-STD-020, which can be downloaded from www.jedec.org.

 For more information regarding MSL, see the u-blox Package Information Guide [3].

6.4 Reflow soldering



Reflow profiles are to be selected according u-blox recommendations (see the EVA-8M / EVA-M8 Hardware Integration Manual [1]).

6.5 ESD handling precautions

 EVA-M8M/Q modules contain highly sensitive electronic circuitry and are Electrostatic Sensitive Devices (ESD). Observe precautions for handling! Failure to observe these precautions can result in severe damage to the GNSS receiver!

GNSS receivers are Electrostatic Sensitive Devices (ESD) and require special precautions when handling. Particular care must be exercised when handling patch antennas, due to the risk of electrostatic charges. In addition to standard ESD safety practices, the following measures should be taken into account whenever handling the receiver:

- Unless there is a galvanic coupling between the local GND (i.e. the work table) and the PCB GND, the first point of contact when handling the PCB must always be between the local GND and PCB GND.
- Before mounting an antenna patch, connect ground of the device
- When handling the RF pin, do not come into contact with any charged capacitors and be careful when contacting materials that can develop charges (e.g. patch antenna ~10pF, coax cable ~50-80 pF/m, soldering iron, ...)
- To prevent electrostatic discharge through the RF input, do not touch any exposed antenna area. If there is any risk that such exposed antenna area is touched in non ESD protected work area, implement proper ESD protection measures in the design.
- When soldering RF connectors and patch antennas to the receiver's RF pin, make sure to use an ESD safe soldering iron (tip).

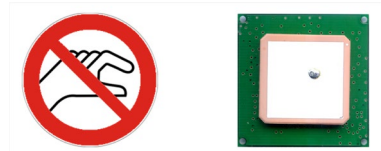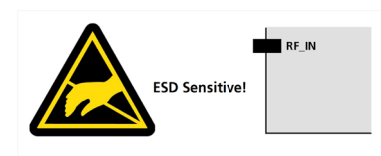

¹⁶ only two reflow soldering processes are done in the MSL qualification due to internal component limitation.

7 Default messages

| Interface | Settings |
|--------------------------|---|
| UART Output | 9600 Baud, 8 bits, no parity bit, 1 stop bit Configured to transmit both NMEA and UBX protocols, but only the following NMEA (no UBX) messages have been activated at start-up: GGA, GLL, GSA, GSV, RMC, VTG, TXT |
| USB Output | Configured to transmit both NMEA and UBX protocols, but only the following NMEA (no UBX) messages have been activated at start-up: GGA, GLL, GSA, GSV, RMC, VTG, TXT USB Power Mode: Bus Powered |
| UART Input | 9600 Baud, 8 bits, no parity bit, 1 stop bit, Autobauding disabled Automatically accepts following protocols without need of explicit configuration: UBX, NMEA, RTCM The GNSS receiver supports interleaved UBX and NMEA messages. |
| USB Input | Automatically accepts following protocols without need of explicit configuration: UBX, NMEA, RTCM The GNSS receiver supports interleaved UBX and NMEA messages. USB Power Mode: Bus Powered |
| DDC | Fully compatible with the I ² C industry standard, available for communication with an external host CPU or u-blox cellular modules, operated in slave mode only. Default messages activated. NMEA and UBX are enabled as input messages, only NMEA as output messages. Maximum bit rate 400 kb/s. |
| SPI | Allow communication to a host CPU, operated in slave mode only. Default messages activated. SPI is not available in the default configuration |
| TIMEPULSE (1 Hz Nav) | 1 pulse per second, synchronized at rising edge, pulse length 100 ms |

Table 18: Default messages

 Refer to the u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification [\[2\]](#) for information about other settings.

8 Labeling and ordering information

8.1 Product labeling

The labeling of u-blox EVA form factor GNSS modules includes important product information. The location of the EVA-M8M/Q product type number is shown in [Figure 7](#).

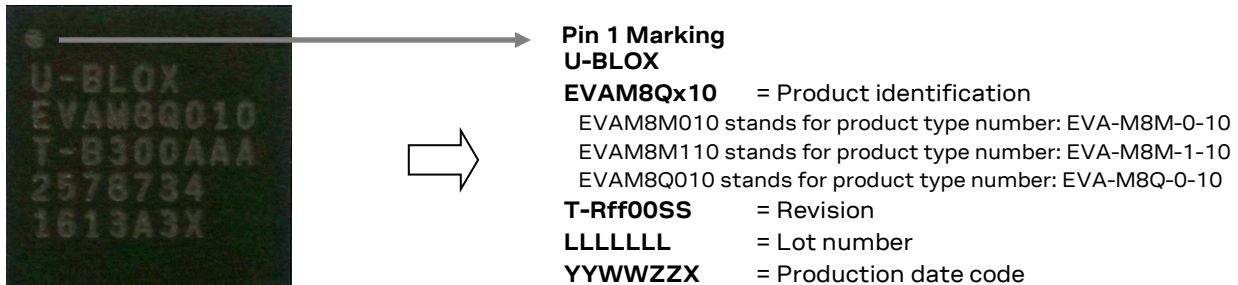


Figure 7: Description of EVA-M8Q product label

8.2 Explanation of product codes

Three different product code formats are used. The **Product Name** is used in documentation such as this data sheet and identifies all u-blox M8 products, independent of packaging and quality grade. The **Ordering Code** includes packaging and quality, while the **Type Number** includes the hardware and firmware versions. [Table 19](#) below details these three different formats:

| Format | Structure |
|---------------|--------------|
| Product Name | PPP-TGV-N |
| Ordering Code | PPP-TGV-N |
| Type Number | PPP-TGV-N-XX |

Table 19: Product code formats

The parts of the product code are explained in [Table 20](#).

| Code | Meaning | Example |
|------|-------------------------|---|
| PPP | Product Family | EVA |
| TG | Technology & Generation | M8 = u-blox M8 |
| V | Variant | Function set (A-Z) |
| N | Option/ Quality Grade | Describes standardized functional element or quality grade 0 = Default variant, A = Automotive |
| XX | Product Detail | Describes product details or options such as hardware and software revision, cable length, etc. |

Table 20: Part identification code

8.3 Ordering codes

| Ordering No. | Product |
|--------------|--|
| EVA-M8M-0 | u-blox M8 GNSS LGA Module, crystal, ROM, green, 7.0x7.0 mm, 500 pieces/reel (Default: GPS + GLONASS) |
| EVA-M8M-1 | u-blox M8 GNSS LGA Module, crystal, ROM, green, 7.0x7.0 mm, 500 pieces /reel (Default: GPS + BeiDou) |
| EVA-M8Q-0 | u-blox M8 GNSS LGA Module, TCXO, ROM, green, 7.0x7.0 mm, 500 pieces /reel (Default: GPS + GLONASS) |

Table 21: Product ordering codes for professional grade positioning modules

Product changes affecting form, fit or function are documented by u-blox. For a list of Product Change Notifications (PCNs), see our website.

Appendix


A Glossary

| Abbreviation | Definition |
|--------------|---|
| AEC | Automotive Electronics Council |
| BBR | Battery Backed RAM |
| DDC | Display Data Channel |
| EGNOS | European Geostationary Navigation Overlay Service |
| GAGAN | GPS Aided GEO Augmented Navigation |
| GNSS | Global Navigation Satellite System |
| GLONASS | GLObal Navigation Satellite System (Russian) |
| GND | Ground |
| GPS | Global Positioning System |
| IMES | Indoor MESSaging System |
| LCS | LoCation Services (protocol) |
| LGA | Land Grid Array |
| LNA | Low Noise Amplifier |
| MSAS | MTSAT Satellite Augmentation System |
| MSL | Moisture Sensitivity Level |
| NMEA | National Marine Electronics Association |
| PCB | Printed Circuit Board |
| PCN | Product Change Notification |
| QZSS | Quasi-Zenith Satellite System |
| RLM | Return Link Message |
| RRLP | Radio Resource LCS Protocol |
| RTC | Real Time Clock |
| RTCM | Radio Technical Commission for Maritime Services |
| SAW | Surface Acoustic Wave |
| SBAS | Satellite-Based Augmentation System |
| SCL | Serial Clock |
| SUPL | Secure User Plane Location |
| TCXO | Temperature-Compensated Crystal Oscillator |
| TTFF | Time-To-First-Fix |
| UART | Universal Asynchronous Receiver/Transmitter |
| WAAS | Wide Area Augmentation System |

Table 22: Explanation of the abbreviations and terms used

Related documents

- [1] EVA-8M / EVA-M8 Hardware Integration Manual, Doc. No. UBX-16010593
- [2] u-blox 8 / u-blox M8 Receiver Description Including Protocol Specification (Public version), Doc. No. UBX-13003221
- [3] u-blox Package Information Guide, Doc. No. UBX-14001652
- [4] RTCM 10402.3 Recommended Standards for Differential GNSS, Ver. 2.3, RTCM AUG. 20, 2001
- [5] Power Management Application Note, Doc. No. UBX-13005162
- [6] Radio Resource LCS Protocol (RRLP), (3GPP TS 44.031 version 11.0.0 Release 11)

 For regular updates to u-blox documentation and to receive product change notifications, register on our homepage (www.u-blox.com).

Revision history

| Revision | Date | Name | Comments |
|----------|-------------|-----------|--|
| R01 | 15-Jun-2016 | njaf | Objective Specification |
| R02 | 15-Aug-2016 | julu | Advance Information, added EVA-M8Q related footnote in section 6.2 (MSL). |
| R03 | 20-Jan-2017 | jesk | Early Production Information, updated supply voltage range for EVA-M8Q in section 1.2 and Table 11, updated section 1.5 with QZSS clarification and Galileo Initial Services, corrected reference to RRLP specification in section 1.8, added section 6.2 (storage temperature statement) and section 6.5 (soldering instruction). |
| R04 | 12-Jun-2018 | jesk,mbab | Updated supply voltage range for EVA-M8Q in section 1.2 and in Table 11 (EVA-M8Q supports only the 2.7 V to 3.6 V voltage range). Updated AssistNow Autonomous compatibility in section 1.6.3. Reformat |
| R05 | 10-May-2019 | jesk | Production Information document status. Updated Absolute maximum rating in section 3.1 and RoHS directives in section 5.2. |

Contact

For complete contact information, visit us at www.u-blox.com.

u-blox Offices

North, Central and South America

u-blox America, Inc.

Phone: +1 703 483 3180
E-mail: info_us@u-blox.com

Regional Office West Coast:

Phone: +1 408 573 3640
E-mail: info_us@u-blox.com

Technical Support:

Phone: +1 703 483 3185
E-mail: support@u-blox.com

Headquarters

Europe, Middle East, Africa

u-blox AG

Phone: +41 44 722 74 44
E-mail: info@u-blox.com
Support: support@u-blox.com

Asia, Australia, Pacific

u-blox Singapore Pte. Ltd.

Phone: +65 6734 3811
E-mail: info_ap@u-blox.com
Support: support_ap@u-blox.com

Regional Office Australia:

Phone: +61 2 8448 2016
E-mail: info_au@u-blox.com
Support: support_ap@u-blox.com

Regional Office China (Beijing):

Phone: +86 10 68 133 545
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Chongqing):

Phone: +86 23 6815 1588
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Shanghai):

Phone: +86 21 6090 4832
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Shenzhen):

Phone: +86 755 8627 1083
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office India:

Phone: +91 80 405 092 00
E-mail: info_in@u-blox.com
Support: support_in@u-blox.com

Regional Office Japan (Osaka):

Phone: +81 6 6941 3660
E-mail: info_jp@u-blox.com
Support: support_jp@u-blox.com

Regional Office Japan (Tokyo):

Phone: +81 3 5775 3850
E-mail: info_jp@u-blox.com
Support: support_jp@u-blox.com

Regional Office Korea:

Phone: +82 2 542 0861
E-mail: info_kr@u-blox.com
Support: support_kr@u-blox.com

Regional Office Taiwan:

Phone: +886 2 2657 1090
E-mail: info_tw@u-blox.com
Support: support_tw@u-blox.com