



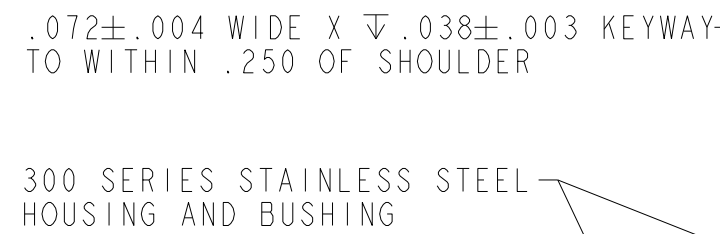

CIRCUIT DIAGRAM, CATALOG LISTING, DATE CODE, AND
E ARE IDENTIFIED ON SWITCH
LLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER
S FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION.
PLACING ROLLER GUIDE LOCK RING
YWELL-MICRO SWITCH IF ADDITIONAL INFORMATION ON LOW ENERGY
IRED OR FOR HELP WITH SPECIFIC APPLICATIONS
LOCK RING - PACKET 15PA137
Y BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

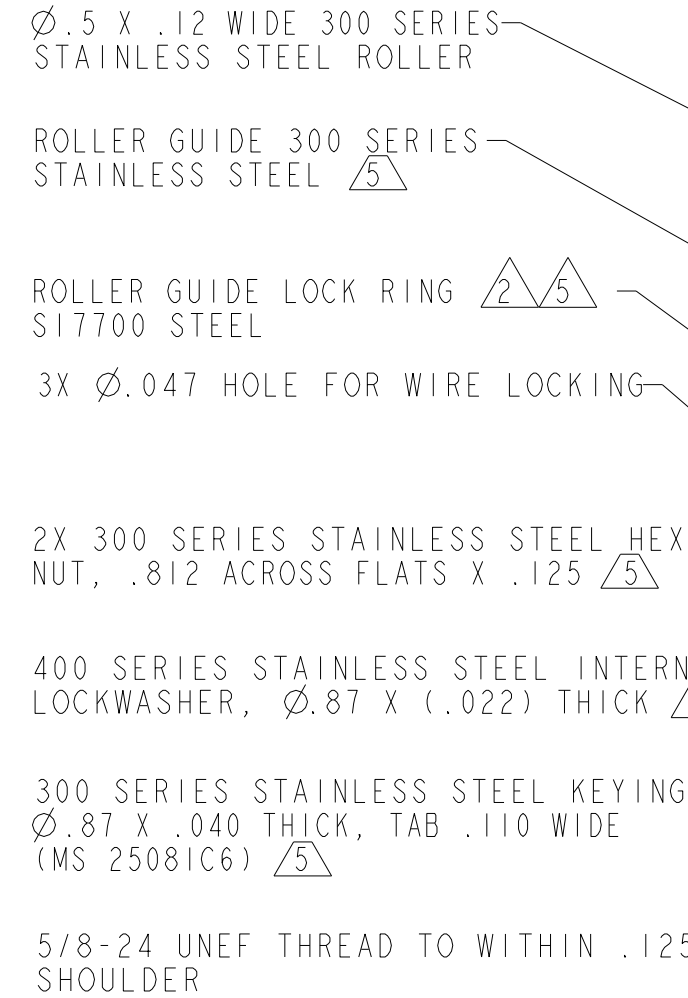

NOTES

- ① MICRO SWITCH, CIRCUIT DIAGRAM, CATALOG LISTING, DATE CODE, AND FED. MFG. CODE ARE IDENTIFIED ON SWITCH
- ② TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION.
- ③ SECURE BY REPLACING ROLLER GUIDE LOCK RING
- ④ CONTACT HONEYWELL-MICRO SWITCH IF ADDITIONAL INFORMATION ON LOW ENERGY LOADS IS REQUIRED OR FOR HELP WITH SPECIFIC APPLICATIONS
- ⑤ - REPLACEMENT LOCK RING - PACKET 15PA137
- ⑥ HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			ONE PLACE (.0) +.030
FED. MFG. CODE 91929 MICRO SWITCH a Honeywell Division			TWO PLACE (.00) +.015
			THREE PLACE (.000) +.005
SWITCH - ENCLOSED CATALOG LISTING 25EN52-1		ANGLES	+
		WEIGHT 8.4 OZ MAX	