



DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

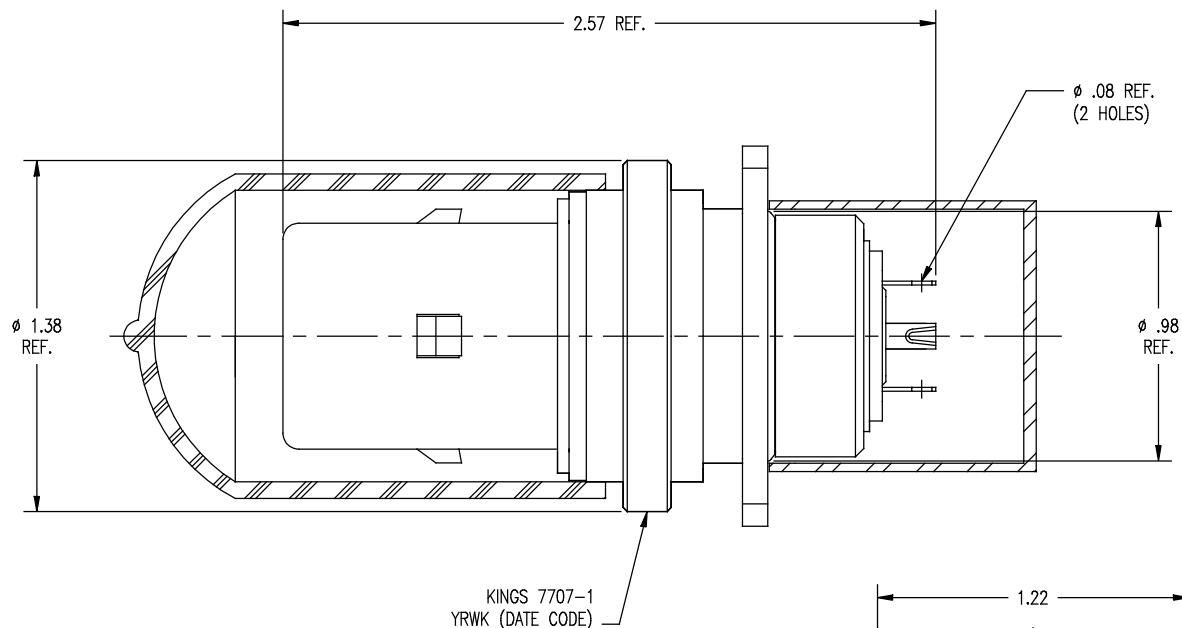

NOTES:

- MATERIALS:
CAPS: VINYL
INSULATORS: TEFLON, ASTM-D4894
GASKETS: SILICONE RUBBER, A-A-59588
CONDUCTIVE GASKETS: CONSIL C 87-10004, 60-70 DUROMETER
RETAINING RING } SPRING STEEL, ASTM-A682
E-RING }
OUTER CONTACT: PHOSPHOR BRONZE, ASTM-B103
BODY: BERYLLIUM COPPER, ASTM-B196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
CENTER CONTACT: GOLD PLATE, ASTM-B488
ALL OTHER METAL PARTS: NICKEL PLATE, SAE-AMS-QQ-N-290
- ELECTRICAL CHARACTERISTICS:
FREQUENCY RANGE: DC-500 MHZ
NOMINAL IMPEDANCE: 75 OHMS
VOLTAGE BREAKDOWN: CENTER CONDUCTOR TO INNER GROUND: 1500 VRMS
INNER GROUND TO OUTER GROUND: 500 VRMS
- SIMILAR TO: LEMO FBK-4A (MAY BE USED ON IKEGAMI HK-388P CAMERA)

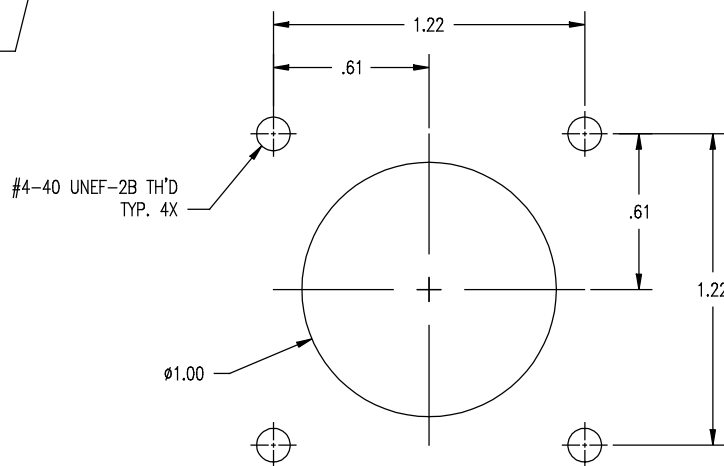

MOUNTING HOLES

GSD

7707-1

REVISIONS	
ISSUE	CHANGES
0	ER 39334 JPK 09/27/05
1	CN 39561 E JPK 08/07/06

7707-1SD
SCALE 2 : 1
APPROX SURFACE AREA N/A
USED ON
REF: EQR 930 & E-20348
RECEIPT, TRI-LOC, PANEL MT
DRAWN J. KENNEDY DATE 06/07/05
DESIGN J. KENNEDY DATE 06/07/05
APPR. DATE
 ROCK HILL, SOUTH CAROLINA 29730
7707-1