

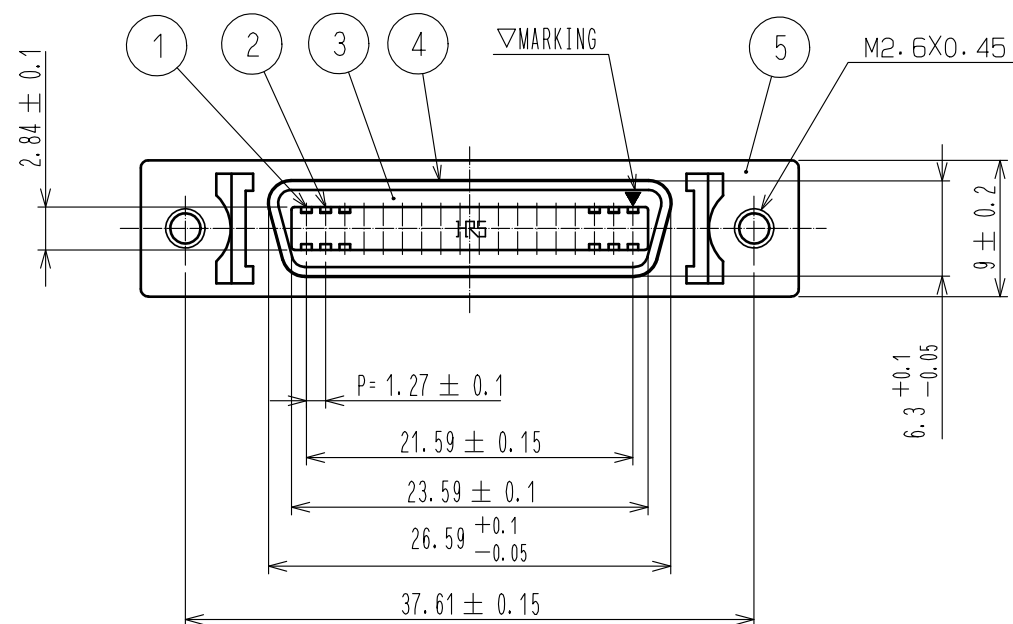
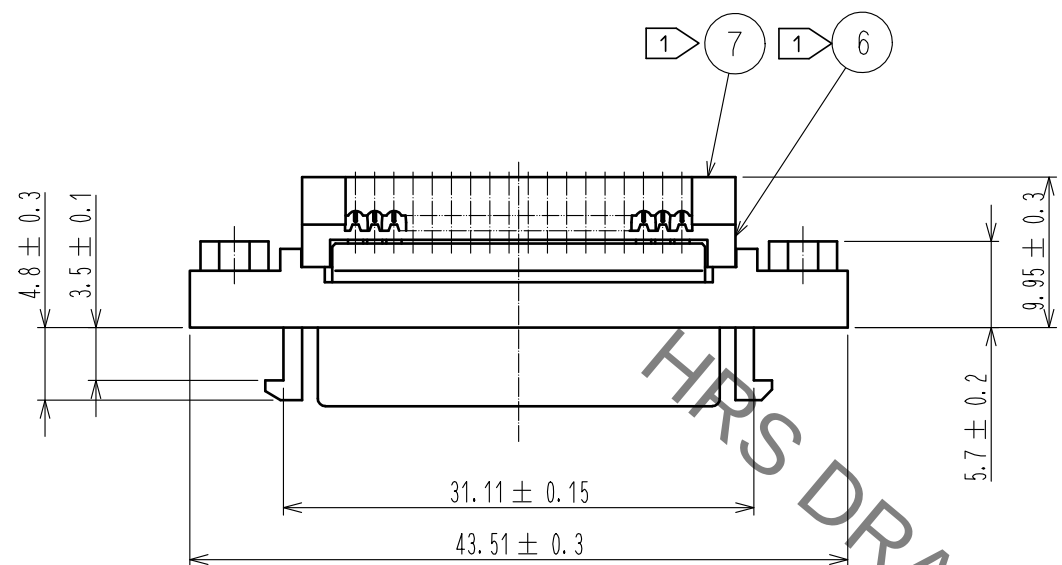


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



PANEL CUTOUT FOR REFERENCE

(t=1.6mm MAX)

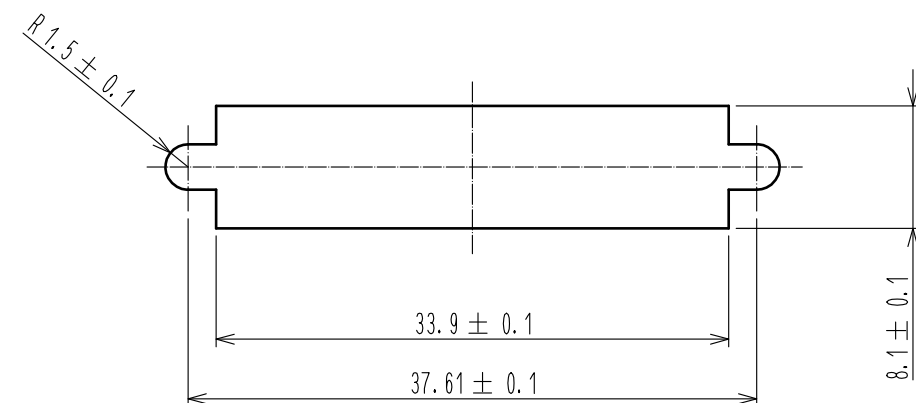

NOTE COMPONENTS OF REF. NO. ⑥ AND ⑦ ARE APPENDED PRODUCTS.

3	PBT	BLACK , UL94V-0	7	PBT	BLACK , UL94V-0
2	BERYLLIUM COPPER	CONTACT : GOLD PLATING 0.3μm MIN LEAD : GOLD PLATING 0.03μm MIN UNDER : NICKEL PLATING 2μm MIN	6	PBT	BLACK , UL94V-0
1	BERYLLIUM COPPER	CONTACT : GOLD PLATING 0.3μm MIN LEAD : GOLD PLATING 0.03μm MIN UNDER : NICKEL PLATING 2μm MIN	5	ZING ALLOY DIE CASTING	OVER : NICKEL PLATING 2μm MIN UNDER : COPPER PLATING 1μm MIN
			4	STEEL	OVER : NICKEL PLATING 1μm MIN UNDER : COPPER PLATING 5μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	1	DESCRIPTION OF REVISIONS DIS-E-00000742	DESIGNED TS. ITO	CHECKED NM. NISHIMATSU	DATE 16.11.09
 HIROSE ELECTRIC CO., LTD.		APPROVED	RI. TAKAYASU		11.02.28	DRAWING NO.	EDC-043345-50-01	
		CHECKED	YH. ENAMI		11.02.28	PART NO.	DX33AM-36S(50)	
		DESIGNED	KI. NAGANUMA		11.02.28	CODE NO.	CL230-5095-2-50	
		DRAWN	KI. NAGANUMA		11.02.28	 1/1		