

LOC

DIST

REVISIONS

AP

-

P

LTR

DESCRIPTION

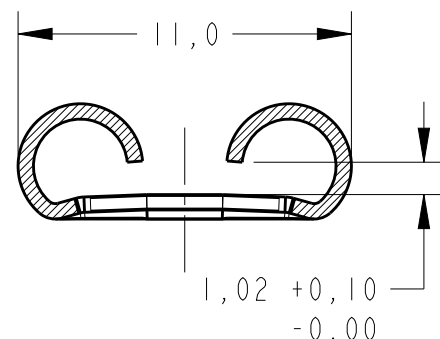
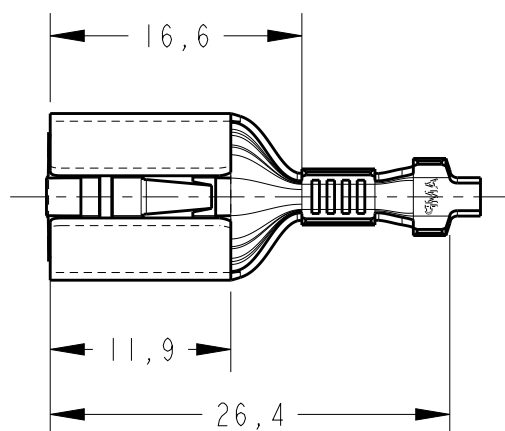

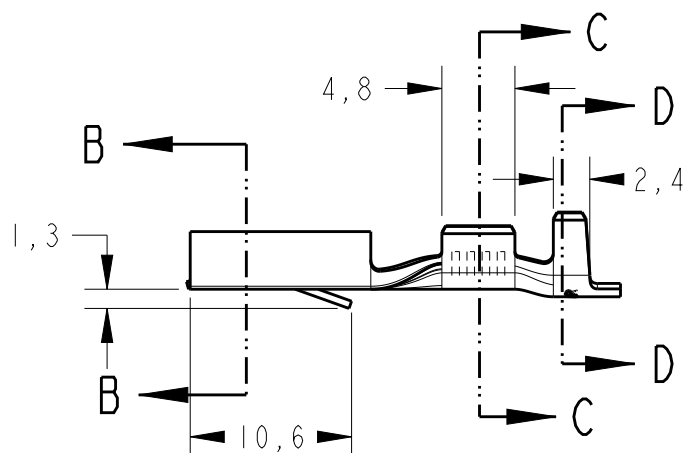
DATE

DWN

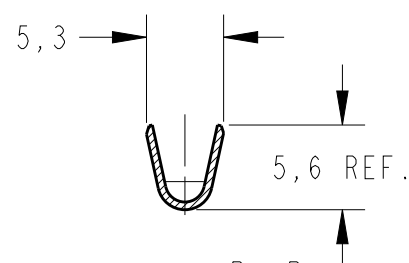
APVD

creo

Creo Parametric 2.0

**DO NOT REVISE
EXCEPT BY CAD**B
BIREDRAW BY CAD ECO-14-007082
REVISED BY ECO 16-00580314MAY2014
28JUN2016NCL
HCLWP
WLSSECTION B-B
SCALE 4:1

SECTION C-C



SECTION D-D

WIRE RANGE

>1,0-2,5 mm²

INSUL. RANGE

2,1-3,7 Ømm

OBSOLETE

ESTANHADO / TINNED

BRONZE FOSF.
PHOSF. BRONZE

444008-4

444008-3

OBSOLETE

ESTANHADO / TINNED

LATÃO / BRASS

444008-2

444008-1

FINISH

MATERIAL

PART NUMBER

DIMENSIONS:

mm

DWN
A. PERUSSI

25MAY2009

MATERIAL

FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:CHK
M. RODRIGUES

25MAY2009

APVD
L. W. PRADO

25MAY2009

PRODUCT SPEC

108-37015

APPLICATION SPEC

-

WEIGHT

-

NAME

.375 S. FAST-IN-ON RECEPTACLE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A4

-

C-444008

-

Customer Drawing

SCALE 2:1

SHEET 1

OF 1

REV

BI

20

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY -

COPYRIGHT 20

THIS DRAWING IS UNPUBLISHED.

0 PLC ±
1 PLC ±0,3
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±1°

