
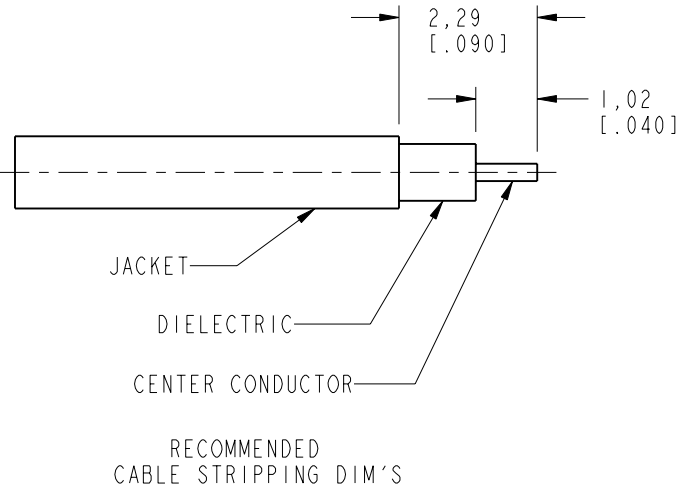


NOTES:
1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
 BODY - BRASS, GOLD PLATING
 CONTACT - BRASS, GOLD PLATING
 CAP - BRASS, GOLD PLATING
 INSULATOR - PTFE, NATURAL
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65° TO +165°
4. SOLDER CENTER AND OUTER CONDUCTOR
5. USE ASSEMBLY INSTRUCTIONS 349-50602.

THIRD ANGLE PROJ. 

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	OFFICIAL ENG. RELEASE TO MFG.	06-05-96	41376	BCG
B	REVISED, CHANGES TO SHEET 1 OF 2 ONLY	6/28/96	41446	BCG
C	SEE SHEET 1	3/23/09	47451	CPM
D	TRANSFER TO ARFA	08-Jun-12	49118	SH

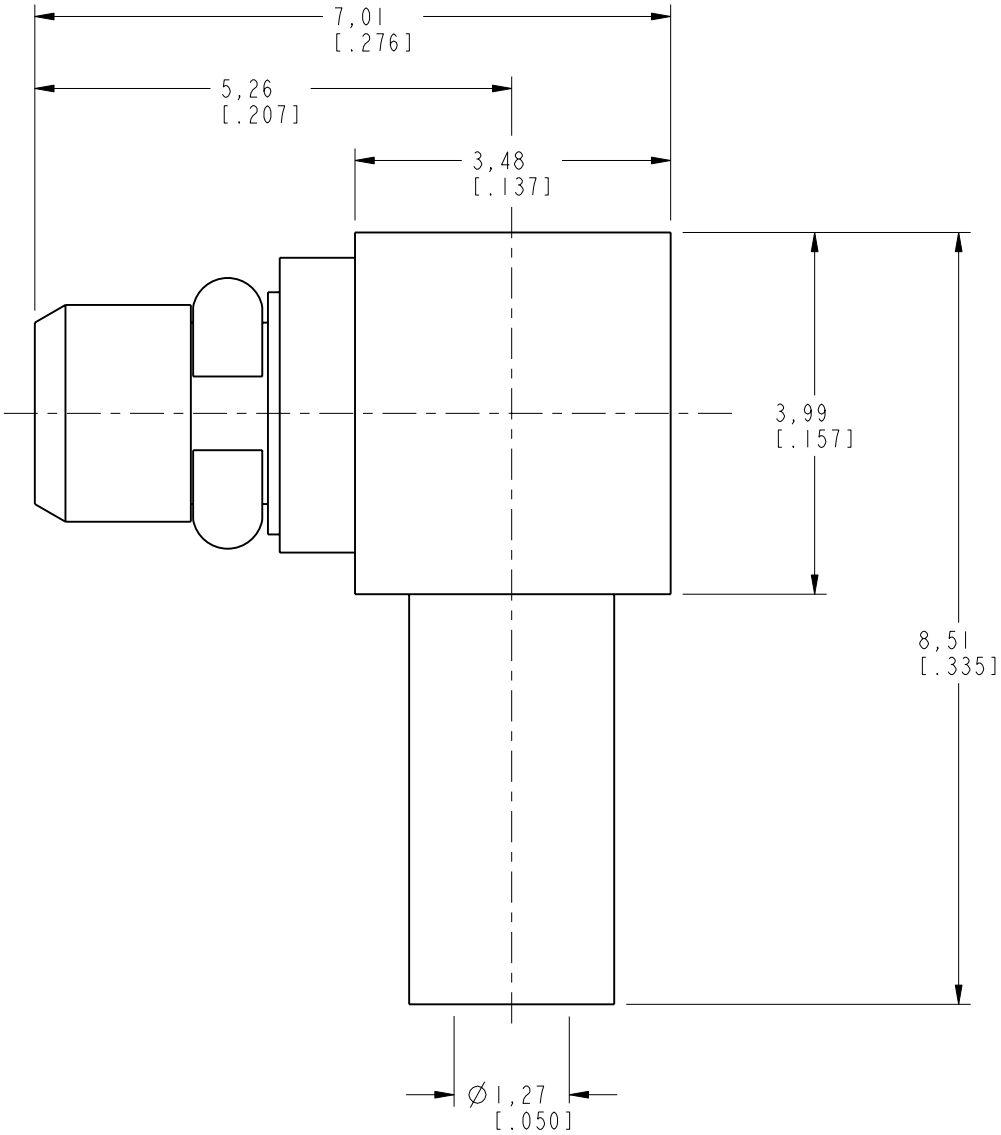

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwsie, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN R. MAO	DATE 06-Jun-12	TITLE MICROMATE (MALE), RIGHT ANGLE FOR .047 S/R CABLE	Amphenol RF www.amphenolrf.com	
	-	ENGINEER R. VACCARO	DATE 18-May-96			
	REFERENCE	APPROVED S. HSIEH	DATE 06-Jun-12		DRAWING NO. 908-43600	
	EAR 965057-0 GEN# ASSYM2_MMCX	CAD FILE		SCALE: 12.0:1.0	SHEET 2 OF 2	ITEM NO. 908-43600
	FINISH			DWG SIZE B	REV D	PART NO. 908-43600