

Coaxial

Adapter, N-FEM to SMA-FEM

50Ω

DC to 18 GHz

NF-SF50+



Generic photo used for illustration purposes only

CASE STYLE: DJ827

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- flat response
- excellent VSWR
- passivated stainless steel
- low cost adapters, available from stock

Applications


- interconnection of RF cables and equipment

Connectors	Model
Conn1 N-FEM	Conn2 SMA-FEM NF-SF50+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

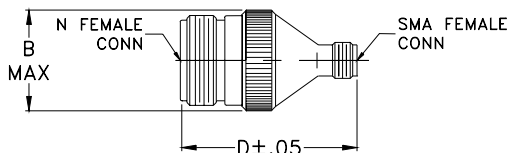

Outline Dimensions (inch/mm)



A	B	C	D	E	wt
--	.70	--	1.23	--	grams
--	17.78	--	31.24	--	26.0

Electrical Specifications $T_{AMB}=25^{\circ}\text{C}$

FREQUENCY (GHz)	INSERTION LOSS (dB)	VSWR (:1) Max.		
		DC-8 GHz	DC-12.4 GHz	DC-18 GHz
f_L-f_U	Typ.			
DC-18	0.1	1.15	1.20	1.25

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		N-FEM	SMA-FEM
10.00	0.01	1.00	1.00
50.00	0.01	1.00	1.00
100.00	0.01	1.00	1.00
500.00	0.02	1.00	1.01
1000.00	0.03	1.00	1.01
1500.00	0.04	1.01	1.01
2000.00	0.04	1.01	1.02
2500.00	0.05	1.02	1.03
3000.00	0.06	1.02	1.03
4000.00	0.07	1.02	1.03
5000.00	0.08	1.03	1.04
6000.00	0.09	1.06	1.04
9000.00	0.09	1.05	1.04
10000.00	0.11	1.00	1.05
12000.00	0.15	1.08	1.07
13000.00	0.14	1.10	1.10
14000.00	0.10	1.09	1.11
15000.00	0.11	1.04	1.05
17000.00	0.18	1.15	1.09
18000.00	0.18	1.21	1.21

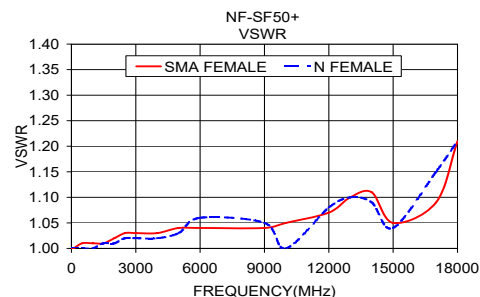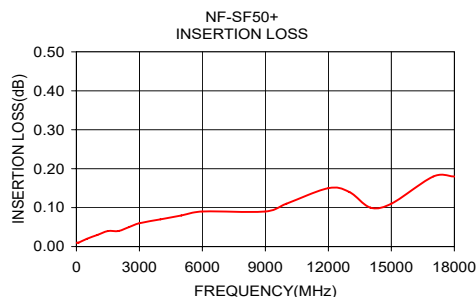

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
M151107
NF-SF50+
EE-9107
RS/TD/CP/AM
200507