

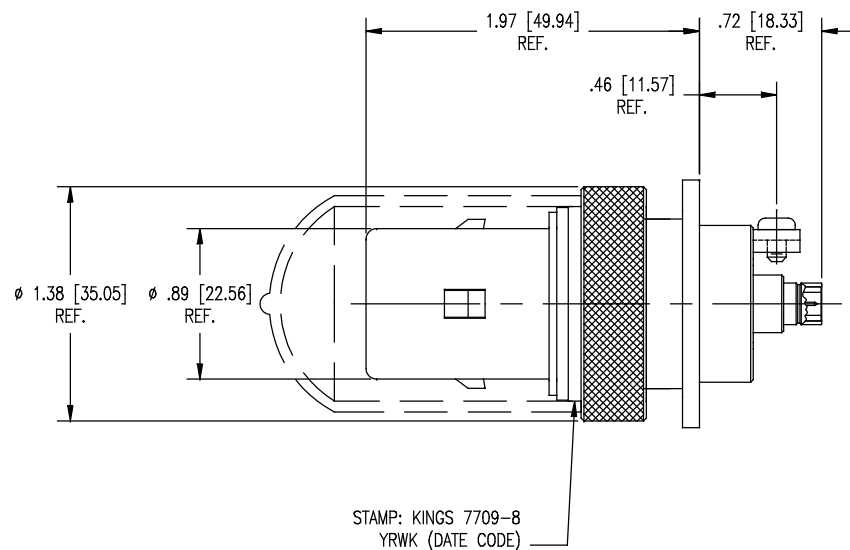


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

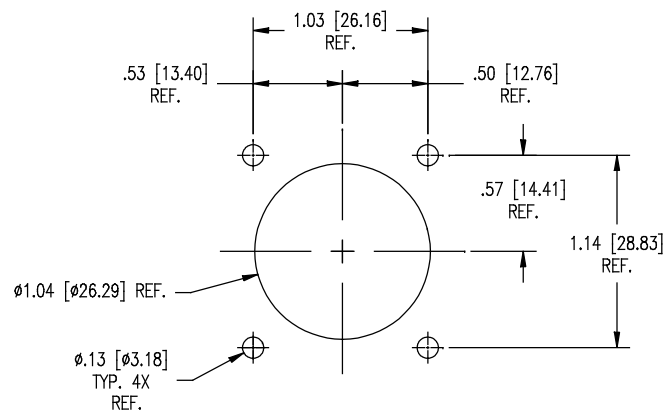

NOTES:

- MATERIALS:**
INSULATORS: TEFLON, ASTM-D4894
GASKETS: SILICONE RUBBER, A-A-59588
CONDUCTIVE GASKETS: CONSIL C 87-10004, 60-70 DUROMETER
CONTACT TIPS: DELRIN 150
PROTECTIVE CAPS: VINYL
BODY: BERYLLIUM COPPER, ASTM-B196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:**
CENTER CONTACT: HARD GOLD PLATE, ASTM-B488
ALL OTHER METAL PARTS: NICKEL PLATE, SAE-AMS-QQ-N-290
- ELECTRICAL CHARACTERISTICS:**
NOMINAL IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC TO 500 MHz
WORKING VOLTAGE: 500 VRMS
- MECHANICAL CHARACTERISTICS:**
AXIAL PULL: 150 LBS.
OFF AXIS TORQUE: 110 IN-LBS.
- SIMILAR TO:** LEMO AZG-4A (MAY BE USED ON GRASSVALLEY/THOMPSON LDK-5000/LDK-6000 MARK2 WORLDCAM CAMERA)

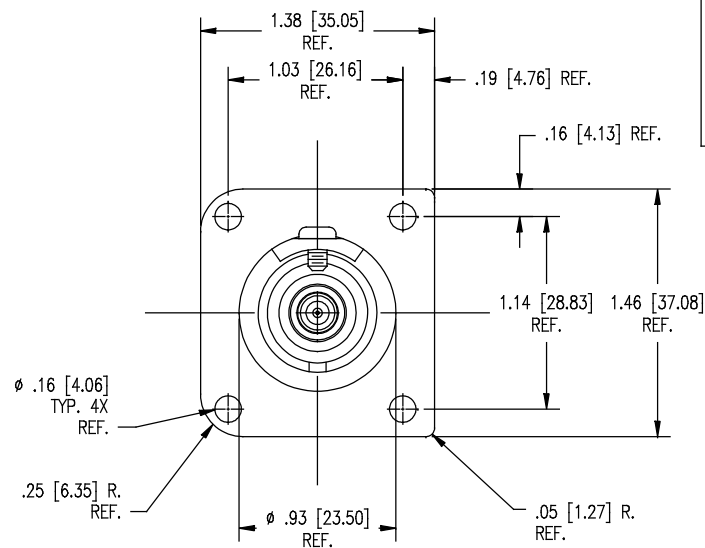

MOUNTING HOLE

GSD

GSD

7709-8

REVISIONS	
ISSUE	CHANGES
1	ER 39549 JPK 07/28/06
2	CN 39561 E JPK 08/07/06

7709-8SD	
SCALE	3 : 2
APPROX SURFACE AREA	N/A
USED ON	
REF:	EQR 904
ADPT, TRI-LOC TO SMB	
DRAWN J. KENNEDY	DATE 05/23/05
DESIGN J. KENNEDY	DATE 05/20/05
APPR.	DATE
KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730	
7709-8	