THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -- . -
© COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T	REV PER ECO 18-000361	3-27-18	CT	DM

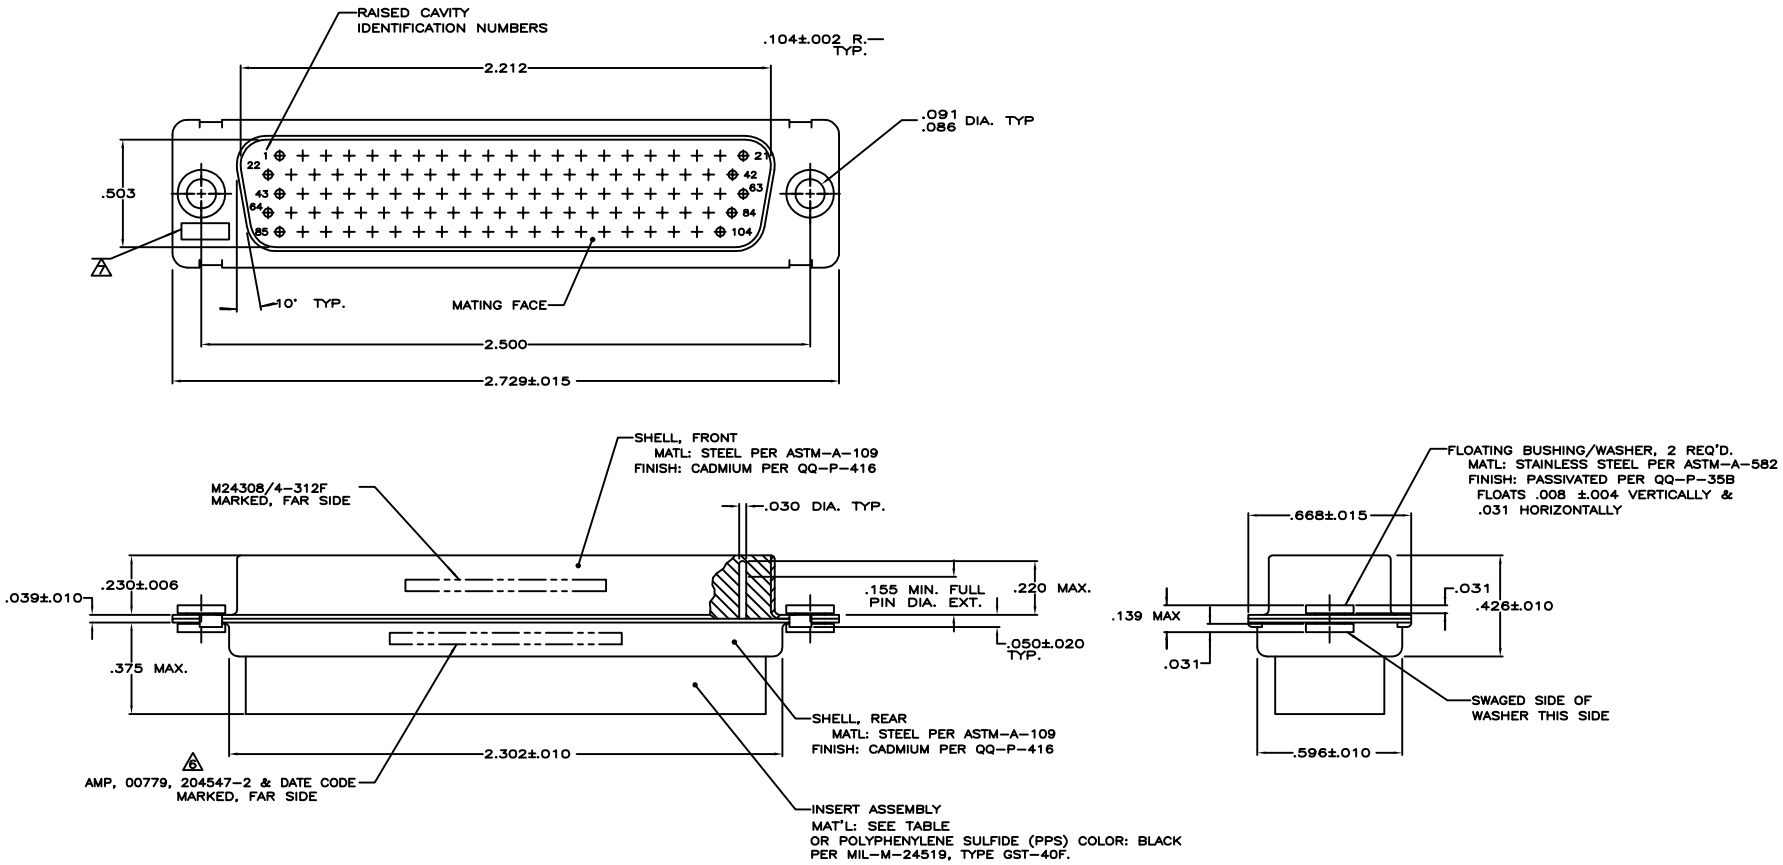

1. THIS PLUG IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308
2. MAX WIRE INSUL. TO BE USED WITH THIS PLUG IS .054 DIA.
3. METAL RETENTION CLIPS ARE INCLUDED IN INSERTS
4. PACKAGE MARKED M 24308/4-334F
5. THIS PLUG WILL ACCEPT SIZE 22 PIN CONTACT M 24308/13 OR AMP # 204370

6 AMP PART NO. MARKED ON CONNECTOR REPRESENTS KIT NUMBER WITH CONTACTS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – ; 1 PLC ± – ; 2 PLC ± – ; 3 PLC ± .005 ; 4 PLC ± – ; ANGLES ± 0°30'

MATERIAL: SEE CALLOUTS

FINISH: SEE CALLOUTS

DRN: G.C.THOMAS 12-3-97
CHK: F.C.BALLEW III 1-22-98
APVD: F.C.BALLEW III 1-28-98
PRODUCT SPEC: —
APPLICATION SPEC: —
WEIGHT: 0.000000
CUSTOMER DRAWING

TE Connectivity

TITLE: AMPLIMITE PLUG FOR PIN CONTACTS HI-DENSITY D CONNECTOR SIZE 6, 104 POSN., SERIES 90 WITH FLOAT BUSHINGS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-204535	—

SCALE 4:1 SHEET 1 OF 1 REV T

4908 (1/16)