




# PLA-series

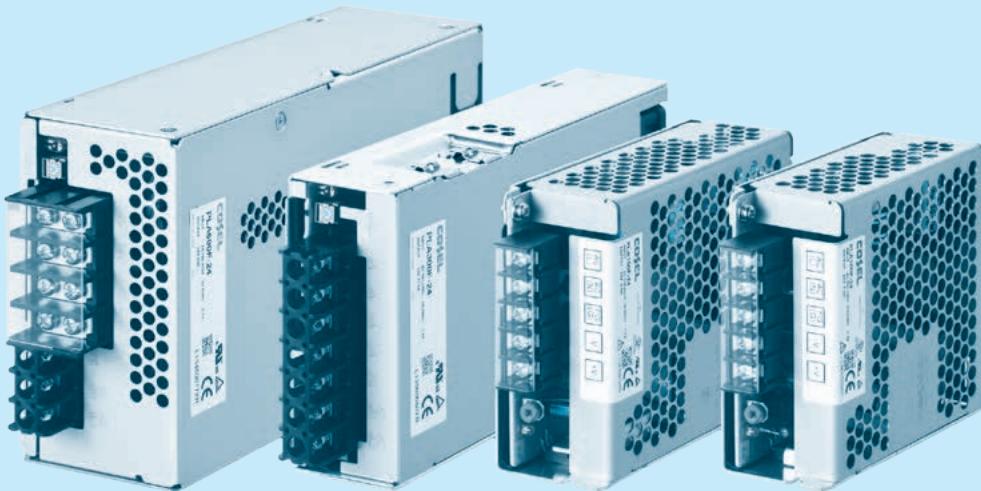

## ■ Feature

Low Profile (15, 30, 50, 100, 150, 300W : 1U size.  
 600W : 2U size)  
 Wide temperature range (-20°C to +70°C, Derating is required)  
 Harmonic attenuator (Complies with IEC61000-3-2 class A)  
 Universal input (AC85 - 264V, Derating is required)  
 Low power consumption at no load  
 Screw hold type terminal block (Only PLA300F and PLA600F)  
 Complies with SEMI F-47 (Option -U : Refer to instruction manual)  
 Many optional functions

## ■ Safety agency approvals

UL60950-1, C-UL (CSA60950-1), EN62368-1  
 UL508 (PLA15F-150F) approved  
 Complies with DEN-AN

## ■ 5-year warranty (See Instruction Manual)

## ■ CE marking

Low Voltage Directive

## ■ UKCA marking

Electrical Equipment Safety Regulations  
 RoHS Regulations

## ■ EMI

Complies with FCC-B, CISPR22-B, EN55011-B, EN55022-B, VCCI-B

## ■ EMS Compliance : EN61204-3, EN61000-6-2

EN61000-4-2  
 EN61000-4-3  
 EN61000-4-4  
 EN61000-4-5  
 EN61000-4-6  
 EN61000-4-8  
 EN61000-4-11

## PLA15F

## Ordering information

PL A 15 F -  - 1 2 3 4 5 6

RoHS



Example recommended EMI/EMC filter  
NAC-04-472



High voltage pulse noise type : NAP series

Low leakage current type : NAM series

\* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

① Series name

② Single output

③ Output wattage

④ Universal input

⑤ Output voltage

⑥ Optional \*7

C: with Coating

J: Connector interface

T: Vertical terminal block

-N□: with DIN rail

See 5.1 in Instruction Manual.

\* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

## SPECIFICATIONS

	MODEL	PLA15F-5	PLA15F-12	PLA15F-15	PLA15F-24
INPUT	VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3			
	CURRENT[A]	ACIN 100V 0.4typ (Io=90%) ACIN 115V 0.4typ (Io=100%) ACIN 230V 0.25typ (Io=100%)			
	FREQUENCY[Hz]	50 / 60 (47 - 63)			
	EFFICIENCY[%]	ACIN 100V 72.5typ (Io=90%) ACIN 115V 73.5typ (Io=100%) ACIN 230V 75.5typ (Io=100%)	75.5typ (Io=90%) 77.0typ (Io=100%) 78.5typ (Io=100%)	77.0typ (Io=90%) 78.5typ (Io=100%) 79.5typ (Io=100%)	78.0typ (Io=90%) 79.0typ (Io=100%) 80.0typ (Io=100%)
	INRUSH CURRENT[A]	ACIN 100V 16typ (Io=90%) Ta=25°C at cold start ACIN 115V 16typ (Io=100%) Ta=25°C at cold start ACIN 230V 32typ (Io=100%) Ta=25°C at cold start			
	LEAKAGE CURRENT[mA]	0.30max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC62368-1 and DEN-AN)			
	VOLTAGE[V]	5	12	15	24
	CURRENT[A]	3	1.3	1	0.7
	WATTAGE[W]	ACIN 85-115V Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) ACIN 115V-264V 15.0	15.6	15.0	16.8
	LINE REGULATION[mV]	*4 20max	48max	60max	96max
OUTPUT	LOAD REGULATION[mV]	*4 40max	100max	120max	150max
	RIPPLE[mVp-p]	0 to +50°C 80max -10 to 0°C 140max Io=0 to 35% 160max	120max 160max 240max	120max 160max 240max	120max 160max 280max
	RIPPLE NOISE[mVp-p]	*1 0 to +50°C 120max -10 to 0°C 160max Io=0 to 35% 240max	150max 180max 300max	150max 180max 300max	150max 180max 320max
	TEMPERATURE REGULATION[mV]	0 to +50°C 50max -10 to +50°C 60max	120max 150max	150max 180max	240max 290max
	DRIFT[mV]	*2 20max	48max	60max	96max
	START-UP TIME[ms]	200typ (ACIN 115V, Io=100%) *Start-up time is 700 ms typ for less than 1 minute of applying input again from turning off the input voltage.			
	HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)			
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.50 to 5.50	10.80 to 13.20	13.50 to 16.50	21.60 to 26.40
	OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
PROTECTION CIRCUIT AND OTHERS	OVERVOLTAGE PROTECTION[V]	5.75 to 7.00	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60
	OPERATING INDICATION	LED (Green)			
	REMOTE SENSING	Not provided			
	REMOTE ON/OFF	Not provided			
ISOLATION	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)			
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)			
	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature)			
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	*5 -20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max			
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max			
	VIBRATION	10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axes			
	IMPACT	196.1m/s² (20G), 11ms, once each X, Y and Z axes			
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN62368-1, UL508 (Except option -J) Complies with DEN-AN			
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B			
	HARMONIC ATTENUATOR	*8 Complies with IEC61000-3-2 class A			

## SPECIFICATIONS


OTHERS	CASE SIZE/WEIGHT	38 X 80 X 73mm [1.50 X 3.15 X 2.87 inches] (Excluding terminal block and screw) (W X H X D) / 250g max
	COOLING METHOD	Convection
WARRANTY	WARRANTY	*6 5 years (subject to the operating conditions)

- \*1 This is the result of measurement of the testing board with capacitors of 22  $\mu$ F and 0.1  $\mu$ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103. See 1.6 of Instruction Manual for more details.
- When the load factor is 0 - 35%, the switching power loss is reduced by burst operation, which will cause ripple and ripple noise to go beyond the specifications.
- \*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- \*3 As for DC input, consult us for advice.
- \*4 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at 35% load or less.
- \*5 Output power derating is required. See 3.2 in Instruction Manual.
- \*6 See 3.3 in Instruction Manual for more details.
- \*7 Consult us about safety agency approvals for the models with optional functions.
- \*8 Consult us about other classes.
- \* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- \* Parallel operation is not possible with this mode.
- \* Sound noise may be heard from the power supply when used for pulse load.


### Features

- Compact design (Depth: 73mm 2.87inches)
- Low power consumption (1.0W typ AC240Vin, no load at standard model)
- UL508 approved (Except option -J), and complies with SEMI F47
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

### Block diagram

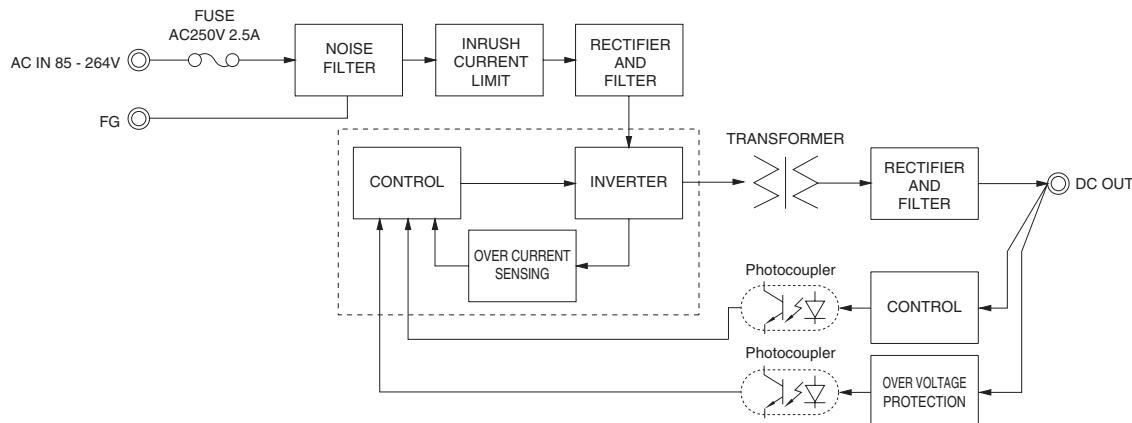

### External view

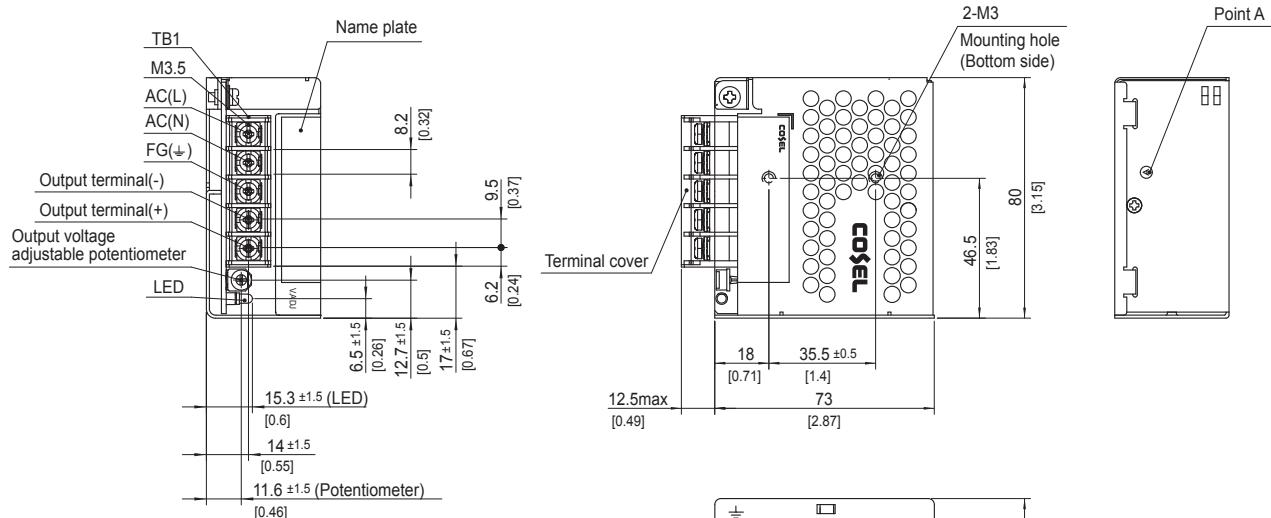

- ※ Tolerance :  $\pm 1$  [ $\pm 0.04$ ]
- ※ Weight : 250g max
- ※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]
- ※ Chassis material : Electric galvanizing steel board
- ※ Case material : Electric galvanizing steel board
- ※ Dimensions in mm, [ ]-inches
- ※ Mounting torque : 0.6N · m max
- ※ Screw tightening torque : 1.0N · m max

## PLA30F

## Ordering information

PL A 30 F -□ -□

① ② ③ ④ ⑤ ⑥ ⑦ ⑧



RoHS



Example recommended EMI/EMC filter  
NAC-04-472



High voltage pulse noise type : NAP series  
Low leakage current type : NAM series

\* A higher current rating EMI/EMC filter  
may be recommended in view of the  
other devices that could be connected  
in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional \*7

C: with Coating  
J: Connector interface  
T: Vertical terminal block  
-N□: with DIN rail

See 5.1 in Instruction Manual.

\* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

## SPECIFICATIONS

	MODEL	PLA30F-5	PLA30F-12	PLA30F-15	PLA30F-24
INPUT	VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3			
	CURRENT[A]	ACIN 100V 0.7typ (Io=90%) ACIN 115V 0.7typ (Io=100%) ACIN 230V 0.4typ (Io=100%)			
	FREQUENCY[Hz]	50 / 60 (47 - 63)			
	EFFICIENCY[%]	ACIN 100V 73.0typ (Io=90%) ACIN 115V 74.0typ (Io=100%) ACIN 230V 77.0typ (Io=100%)	80.0typ (Io=90%) 80.5typ (Io=100%) 81.0typ (Io=100%)	81.0typ (Io=90%) 81.5typ (Io=100%) 82.0typ (Io=100%)	82.5typ (Io=90%) 83.0typ (Io=100%) 83.5typ (Io=100%)
	INRUSH CURRENT[A]	ACIN 100V 16typ (Io=90%) Ta=25°C at cold start ACIN 115V 16typ (Io=100%) Ta=25°C at cold start ACIN 230V 32typ (Io=100%) Ta=25°C at cold start			
	LEAKAGE CURRENT[mA]	0.65max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC62368-1 and DEN-AN)			
	VOLTAGE[V]	5	12	15	24
	CURRENT[A]	6	2.5	2	1.3
	WATTAGE[W]	ACIN 85-115V Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) ACIN 115V-264V 30.0	30.0	30.0	31.2
	LINE REGULATION[mV]	*4 20max	48max	60max	96max
OUTPUT	LOAD REGULATION[mV]	*4 40max	100max	120max	150max
	RISSLE[Pp-p]	0 to +50°C 80max -10 to 0°C 140max	120max 160max	120max 160max	120max 160max
	RISSLE NOISE[mVp-p]	*1 0 to +50°C 120max -10 to 0°C 160max	150max 180max	150max 180max	150max 180max
	TEMPERATURE REGULATION[mV]	0 to +50°C 50max -10 to +50°C 60max	120max 150max	150max 180max	240max 290max
	DRIFT[mV]	*2 20max	48max	60max	96max
	START-UP TIME[ms]	150typ (ACIN 115V, Io=100%)			
	HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)			
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.50 to 5.50	10.80 to 13.20	13.50 to 16.50	21.60 to 26.40
	OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
PROTECTION CIRCUIT AND OTHERS	OVERVOLTAGE PROTECTION[V]	5.75 to 7.00	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60
	OPERATING INDICATION	LED (Green)			
	REMOTE SENSING	Not provided			
	REMOTE ON/OFF	Not provided			
	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)			
ISOLATION	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)			
	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature)			
	OPERATING TEMP., HUMID. AND ALTITUDE	*5 -20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max			
ENVIRONMENT	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max			
	VIBRATION	10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axes			
	IMPACT	196.1m/s² (20G), 11ms, once each X, Y and Z axes			
	AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN62368-1, UL508 (Except option -J) Complies with DEN-AN			
SAFETY AND NOISE REGULATIONS	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B			
	HARMONIC ATTENUATOR	*6 Complies with IEC61000-3-2 class A			

## SPECIFICATIONS


OTHERS	CASE SIZE/WEIGHT	38 X 80 X 88mm [1.50 X 3.15 X 3.46 inches] (Excluding terminal block and screw) (W X H X D) / 330g max
	COOLING METHOD	Convection
WARRANTY	WARRANTY	*6 5 years (subject to the operating conditions)

- \*1 This is the result of measurement of the testing board with capacitors of 22  $\mu$ F and 0.1  $\mu$ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103. See 1.6 of Instruction Manual for more details.
- \*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- \*3 As for DC input, consult us for advice.
- \*4 Consult us about dynamic load and input response.
- \*5 Output power derating is required. See 3.2 in Instruction Manual.
- \*6 See 3.3 in Instruction Manual for more details.
- \*7 Consult us about safety agency approvals for the models with optional functions.
- \*8 Consult us about other classes.
- \*9 Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- \* Parallel operation is not possible with this mode.
- \* Sound noise may be heard from the power supply when used for pulse load.


### Features

- Compact design (Depth: 88mm 3.46inches)
- UL508 approved (Except option -J), and complies with SEMI F47
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

### Block diagram

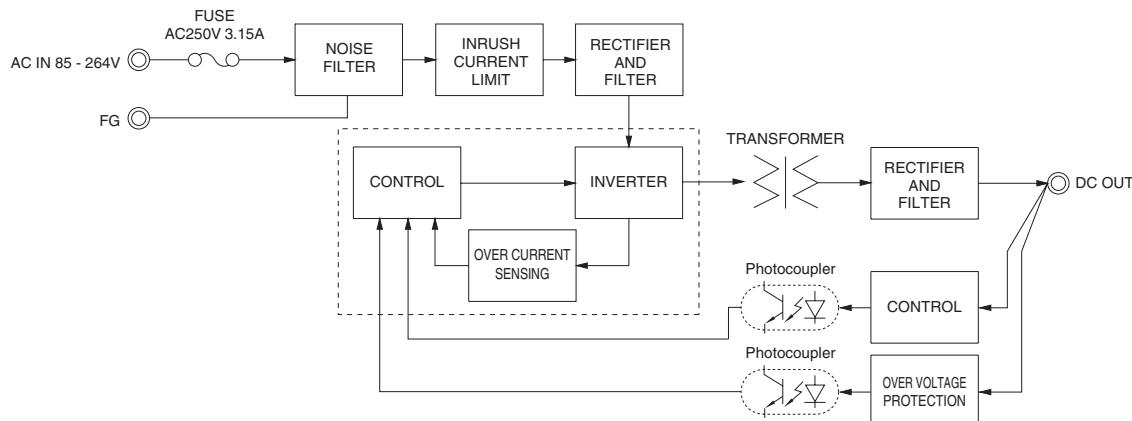

### External view

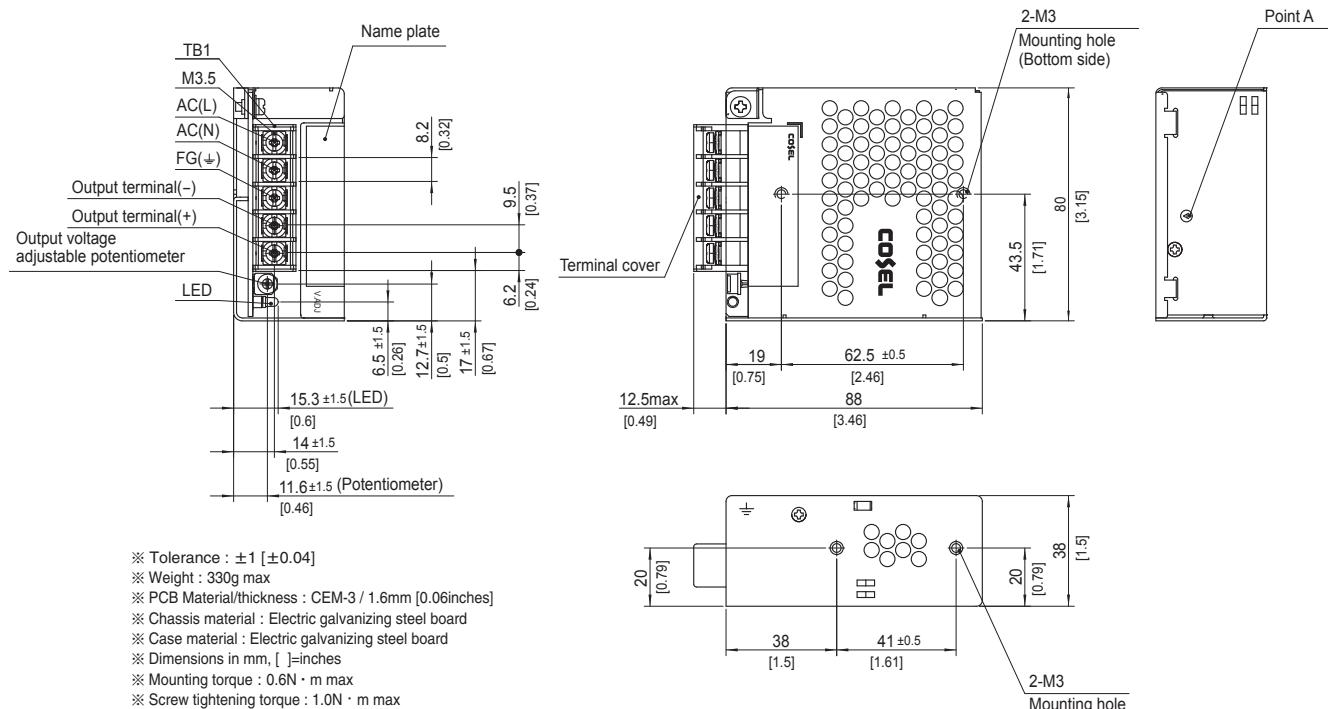

## PLA50F

## Ordering information

PL    -  -       

RoHS



Example recommended EMI/EMC filter  
NAC-04-472



High voltage pulse noise type : NAP series

Low leakage current type : NAM series

\* A higher current rating EMI/EMC filter  
may be recommended in view of the  
other devices that could be connected  
in parallel with the power supply.

① Series name

② Single output

③ Output wattage

④ Universal input

⑤ Output voltage

⑥ Optional \*7

C: with Coating

J: Connector interface

T: Vertical terminal block

-N: with DIN rail

See 5.1 in Instruction Manual.

\* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

## SPECIFICATIONS

	MODEL	PLA50F-5	PLA50F-12	PLA50F-15	PLA50F-24
INPUT	VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3			
	CURRENT[A]	ACIN 100V 0.6typ (Io=90%)	0.7typ (Io=90%)		
	ACIN 115V	0.6typ (Io=100%)	0.7typ (Io=100%)		
	ACIN 230V	0.3typ (Io=100%)	0.4typ (Io=100%)		
	FREQUENCY[Hz]	50 / 60 (47 - 63)			
	EFFICIENCY[%]	ACIN 100V 74.5typ (Io=90%)	80.0typ (Io=90%)	80.0typ (Io=90%)	81.5typ (Io=90%)
	ACIN 115V	75.0typ (Io=100%)	80.5typ (Io=100%)	80.5typ (Io=100%)	82.0typ (Io=100%)
	ACIN 230V	76.5typ (Io=100%)	82.0typ (Io=100%)	82.0typ (Io=100%)	84.0typ (Io=100%)
	POWER FACTOR	ACIN 100V 0.97typ (Io=90%)	0.98typ (Io=90%)		
	ACIN 115V	0.97typ (Io=100%)	0.98typ (Io=100%)		
	ACIN 230V	0.85typ (Io=100%)	0.87typ (Io=100%)		
OUTPUT	INRUSH CURRENT[A]	ACIN 100V 16typ (Io=90%) Ta=25°C at cold start			
	ACIN 115V	16typ (Io=100%) Ta=25°C at cold start			
	ACIN 230V	32typ (Io=100%) Ta=25°C at cold start			
	LEAKAGE CURRENT[mA]	0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC62368-1 and DEN-AN)			
	VOLTAGE[V]	5	12	15	24
	CURRENT[A]	8	4.3	3.5	2.2
	WATTAGE[W]	ACIN 85-115V Output derating is required at ACIN 115V or less (refer to instruction manual 3.2)			
	ACIN 115V-264V	40.0	51.6	52.5	52.8
	LINE REGULATION[mV] *4	20max	48max	60max	96max
	LOAD REGULATION[mV] *4	40max	100max	120max	150max
PROTECTION CIRCUIT AND OTHERS	RIPPLE[mVp-p] *1	0 to +45°C 80max -10 to 0°C 140max	120max 160max	120max 160max	120max 160max
	RIPPLE NOISE[mVp-p] *1	0 to +45°C 120max -10 to 0°C 160max	150max 180max	150max 180max	150max 180max
	TEMPERATURE REGULATION[mV]	0 to +45°C 50max -10 to +45°C 60max	120max 150max	150max 180max	240max 290max
	DRIFT[mV] *2	20max	48max	60max	96max
	START-UP TIME[ms]	350typ (ACIN 115V, Io=100%)			
ISOLATION	HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)			
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.50 to 5.50	10.80 to 13.20	13.50 to 16.50	21.60 to 26.40
	OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
	OVERVOLTAGE PROTECTION[V]	5.75 to 7.00	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60
ENVIRONMENT	OPERATING INDICATION	LED (Green)			
	REMOTE SENSING	Not provided			
	REMOTE ON/OFF	Not provided			
	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)			
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)			
SAFETY AND NOISE REGULATIONS	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature)			
	OPERATING TEMP., HUMID. AND ALTITUDE *5	-20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max			
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max			
	VIBRATION	10 - 55Hz, 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axes			
	IMPACT	196.1m/s <sup>2</sup> (20G), 11ms, once each X, Y and Z axes			
AGENCY APPROVALS	AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN62368-1, UL508 (Except option -J) Complies with DEN-AN			
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B			
	HARMONIC ATTENUATOR *8	Complies with IEC61000-3-2 class A			

## SPECIFICATIONS


OTHERS	CASE SIZE/WEIGHT	38 X 80 X 99mm [1.50 X 3.15 X 3.90 inches] (Excluding terminal block and screw) (W X H X D) / 400g max
	COOLING METHOD	Convection
WARRANTY	WARRANTY	*6 5 years (subject to the operating conditions)

- \*1 This is the result of measurement of the testing board with capacitors of  $22\mu F$  and  $0.1\mu F$  placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103. See 1.6 of Instruction Manual for more details.
- \*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- \*3 As for DC input, consult us for advice.
- \*4 Consult us about dynamic load and input response.
- \*5 Output power derating is required. See 3.2 in Instruction Manual.
- \*6 See 3.3 in Instruction Manual for more details.
- \*7 Consult us about safety agency approvals for the models with optional functions.
- \*8 Consult us about other classes.
- \*9 Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- \* Parallel operation is not possible with this mode.
- \* Sound noise may be heard from the power supply when used for pulse load.


### Features

- Compact design (Depth: 99mm 3.90inches)
- UL508 approved (Except option -J), and complies with SEMI F47
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

### Block diagram

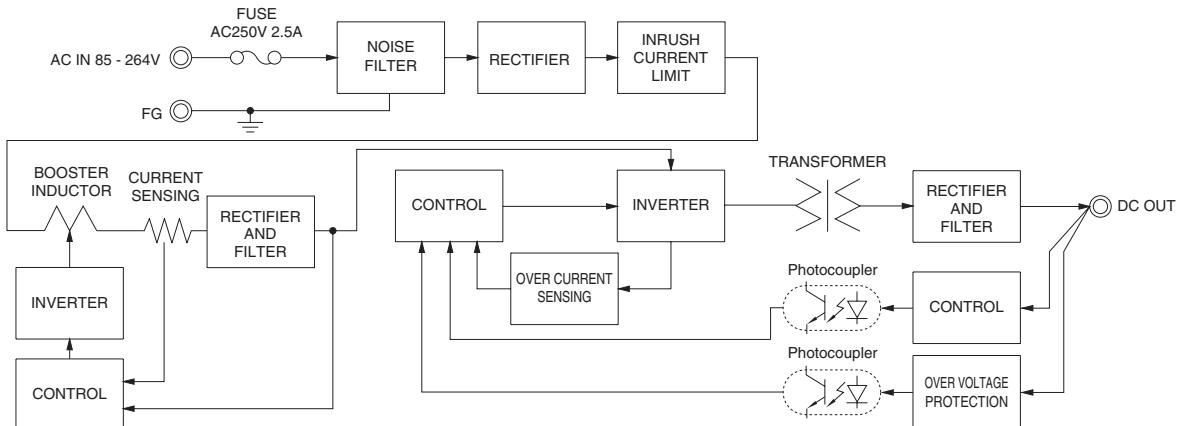

### External view

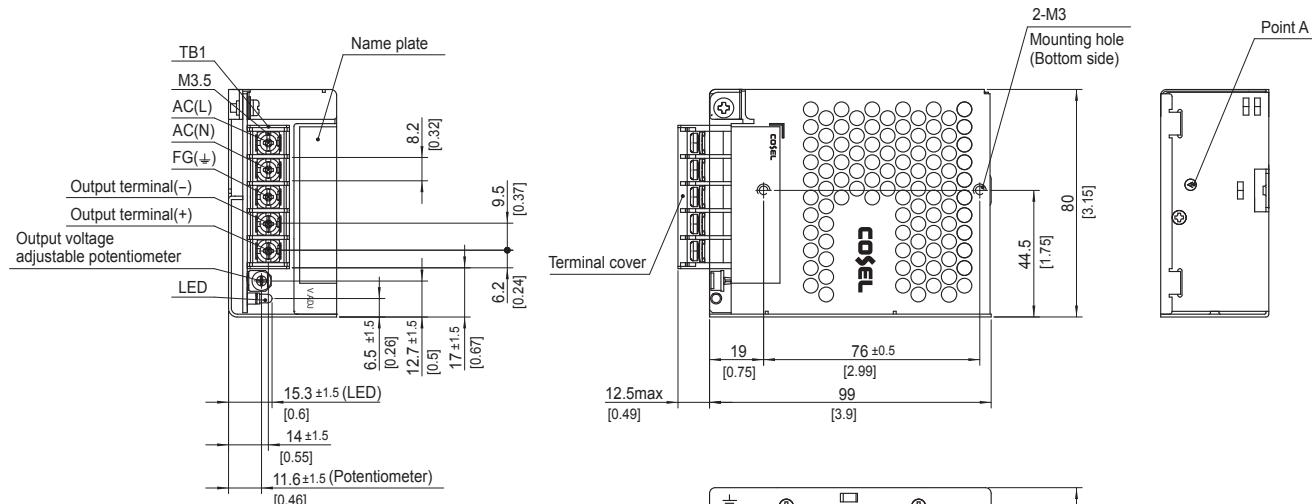

※ Tolerance : ±1 [±0.04]  
 ※ Weight : 400g max  
 ※ PCB Material/Thickness : CEM-3 / 1.6mm [0.06inches]  
 ※ Chassis material : Electric galvanizing steel board  
 ※ Case material : Electric galvanizing steel board  
 ※ Dimensions in mm, [ ]-inches  
 ※ Mounting torque : 0.6N · m max  
 ※ Screw tightening torque : 1.0N · m max

## PLA100F

## Ordering information

PL A 100 F - □ - □① ② ③ ④ ⑤ ⑥ ⑦ ⑧

RoHS

Example recommended EMI/EMC filter  
NAC-04-472High voltage pulse noise type : NAP series  
Low leakage current type : NAM series

\* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

① Series name

② Single output

③ Output wattage

④ Universal input

⑤ Output voltage

⑥ Optional \*7

C: with Coating

R: Remote on/off  
(Required external power source)

J: Connector interface

T: Vertical terminal block

-N□: with DIN rail

See 5.1 in Instruction Manual.

\* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

## SPECIFICATIONS

\* Please consider "PBA100F-5-N" about 5V output with case cover.

MODEL	PLA100F-12	PLA100F-15	PLA100F-24	PLA100F-36	PLA100F-48
VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3				
CURRENT[A]	ACIN 100V 1.2typ (Io=90%) ACIN 115V 1.1typ (Io=100%) ACIN 230V 0.6typ (Io=100%)				
FREQUENCY[Hz]	50 / 60 (47 - 63)				
EFFICIENCY[%]	ACIN 100V 82typ (Io=90%) ACIN 115V 82typ (Io=100%) ACIN 230V 85typ (Io=100%)	83typ (Io=90%)	85typ (Io=90%)	86typ (Io=90%)	86typ (Io=90%)
POWER FACTOR	ACIN 100V 0.98typ (Io=90%) ACIN 115V 0.98typ (Io=100%) ACIN 230V 0.95typ (Io=100%) * Power factor correction is stopped at AC250V or more.				
INRUSH CURRENT[A]	ACIN 100V 16typ (Io=90%) Ta=25°C at cold start ACIN 115V 16typ (Io=100%) Ta=25°C at cold start ACIN 230V 32typ (Io=100%) Ta=25°C at cold start				
LEAKAGE CURRENT[mA]	0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC62368-1 and DEN-AN)				
VOLTAGE[V]	12	15	24	36	48
CURRENT[A]	ACIN 85-115V Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) ACIN 115V-264V 8.4	6.7	4.3	2.8	2.1
WATTAGE[W]	ACIN 85-115V Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) ACIN 115V-264V 100.8	100.5	103.2	100.8	100.8
LINE REGULATION[mV]	*4 48max	60max	96max	144max	192max
LOAD REGULATION [mV]	Io=30 to 100% 100max	120max	150max	150max	300max
*4 Io=0 to 30% Burst operation (Please contact us about detail)					
OUTPUT					
Io: load factor	0 to +40°C 120max	120max	120max	150max	150max
	-10 to 0°C 160max	160max	160max	200max	400max
Io: load factor	Io=0 to 30% 500max	500max	500max	500max	500max
	0 to +40°C 150max	150max	150max	200max	200max
Io: load factor	-10 to 0°C 180max	180max	180max	240max	500max
	Io=0 to 30% 600max	600max	600max	600max	600max
TEMPERATURE REGULATION[mV]	0 to +40°C 120max	150max	240max	360max	480max
	-10 to +40°C 180max	180max	290max	440max	600max
DRIFT[mV]	*2 48max	60max	96max	144max	192max
START-UP TIME[ms]	500typ (ACIN 115V, Io=100%) Ta=25°C				
HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)				
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	32.40 to 39.60	43.20 to 52.80
OUTPUT VOLTAGE SETTING[V]	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92
PROTECTION CIRCUIT AND OTHERS					
OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically				
OVERVOLTAGE PROTECTION[V]	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	41.40 to 50.40	54.00 to 67.20
OPERATING INDICATION	LED (Green)				
REMOTE SENSING	Not provided				
REMOTE ON/OFF	Optional (Required external power source, Option -R)				
ISOLATION					
INPUT-OUTPUT • RC	*9 AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)				
INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)				
OUTPUT • RC-FG	*9 AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)				
OUTPUT-RC	*9 AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)				
ENVIRONMENT					
OPERATING TEMP., HUMID. AND ALTITUDE	*5 -20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max				
STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max				
VIBRATION	10 - 55Hz, 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axes				
IMPACT	196.1m/s <sup>2</sup> (20G), 11ms, once each X, Y and Z axes				
SAFETY AND NOISE REGULATIONS					
AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN62368-1, UL508 (Except option -J) Complies with DEN-AN				
CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B				
HARMONIC ATTENUATOR	*8 Complies with IEC61000-3-2 class A				

## SPECIFICATIONS

<b>OTHERS</b>	<b>CASE SIZE/WEIGHT</b>	41 X 97 X 109mm [1.61 X 3.82 X 4.29 inches] (Excluding terminal block and screw) (W X H X D) / 500g max
	<b>COOLING METHOD</b>	Convection
<b>WARRANTY</b>	<b>WARRANTY</b>	*6 5 years (subject to the operating conditions)

- \*1 This is the result of measurement of the testing board with capacitors of  $22\text{ }\mu\text{F}$  and  $0.1\text{ }\mu\text{F}$  placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103.  
See 1.6 of Instruction Manual for more details.  
When the load factor is 0 - 30%, the switching power loss is reduced by burst operation, which will cause ripple and ripple noise to go beyond the specifications.
- \*2 Drift is the change in DC output for an eight hour period after a half-


- hour warm-up at 25°C.
- \***3** As for DC input, consult us for advice.
- \***4** Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at 30% load or less.
- \***5** Output power derating is required. See 3.2 in Instruction Manual.
- \***6** See 3.3 in Instruction Manual for more details.
- \***7** Consult us about safety agency approvals for the models with optional functions.
- \***8** Consult us about other classes.

- \***9** The RC terminal is added to option –R models. The RC terminal is isolated from input, output, and FG.
- \* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- \* Parallel operation is not possible with this mode.
- \* Sound noise may be heard from the power supply when used for pulse load.

## Features


- **Compact design (Depth: 109mm 4.29inches)**
- **High efficiency (88%typ PLA100F-24, AC230Vin, 100% load)**
- **Low power consumption (1.5W typ AC240Vin, no load at standard model)**
- **UL508 approved (Except option -J), and complies with SEMI F47 (see instruction manual 1.1)**
- **Various connection interface options (vertical terminal [-T], AMP connector [-J])**

## Block diagram

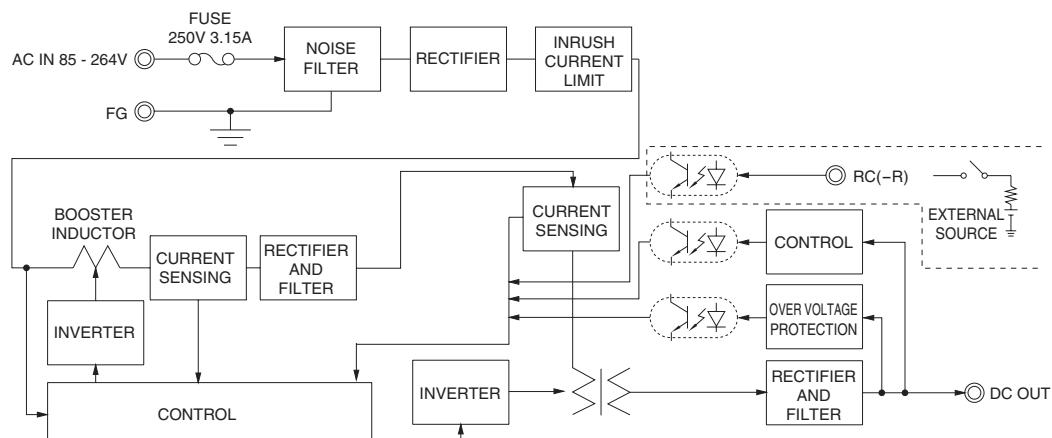

## External view

The external size of **-R** option, **-J** option, **-N1** option and **-T** option models is different from the standard model. See “5. Options and Others” in Instruction Manual for more details.

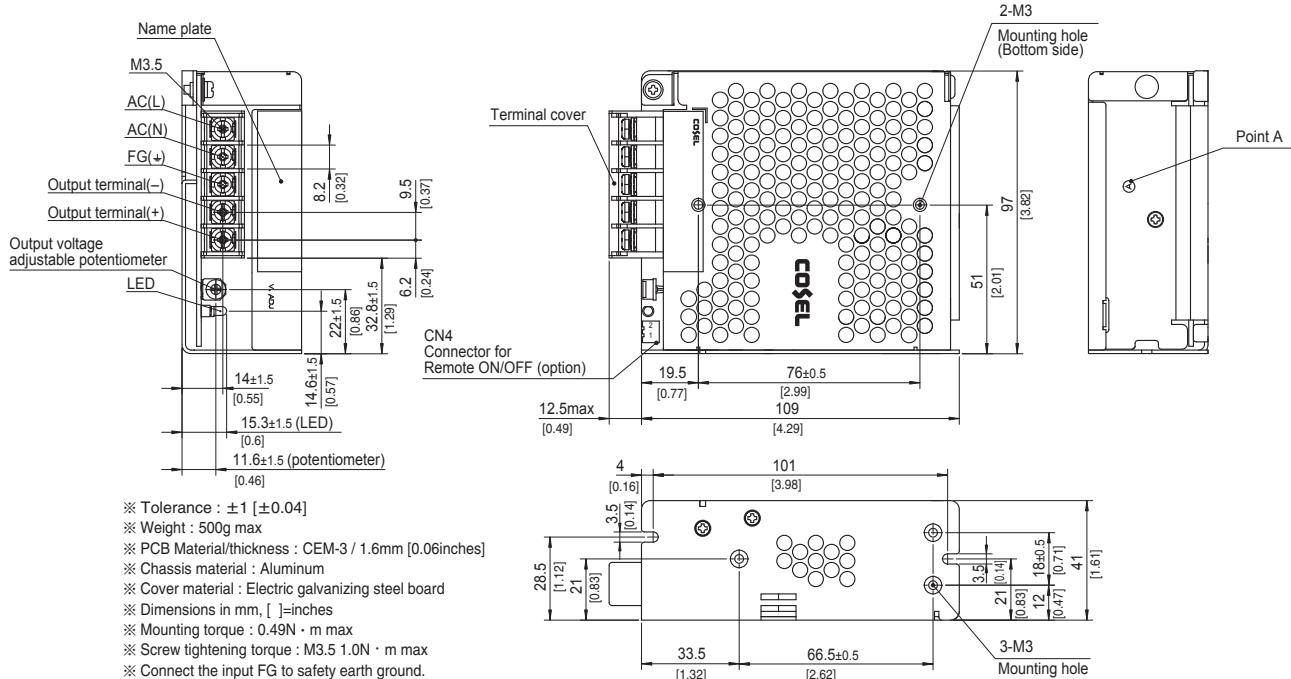

## PLA150F

## Ordering information

PL A 150 F -    -   ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

RoHS

Example recommended EMI/EMC filter  
NAC-04-472High voltage pulse noise type : NAP series  
Low leakage current type : NAM series\* A higher current rating EMI/EMC filter  
may be recommended in view of the  
other devices that could be connected  
in parallel with the power supply.

① Series name  
② Single output  
③ Output wattage  
④ Universal input  
⑤ Output voltage  
⑥ Optional \*7

C: with Coating  
R: Remote on/off  
(Required external power source)  
J: Connector interface  
T: Vertical terminal block  
-N□: with DIN rail

See 5.1 in Instruction Manual.

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

## SPECIFICATIONS

\* Please consider "PBA150F-5-N" about 5V output with case cover.

MODEL	PLA150F-12	PLA150F-15	PLA150F-24	PLA150F-36	PLA150F-48
INPUT	VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3			
	CURRENT[A]	ACIN 100V 1.7typ (Io=90%) ACIN 115V 1.6typ (Io=100%) ACIN 230V 0.8typ (Io=100%)			
	FREQUENCY[Hz]	50 / 60 (47 - 63)			
	EFFICIENCY[%]	ACIN 100V 84typ (Io=90%) ACIN 115V 84typ (Io=100%) ACIN 230V 87typ (Io=100%)	84typ (Io=90%)	87typ (Io=90%)	87typ (Io=90%)
	POWER FACTOR	ACIN 100V 0.98typ (Io=90%) ACIN 115V 0.98typ (Io=100%) ACIN 230V 0.95typ (Io=100%) * Power factor correction is stopped at AC250V or more.	0.98typ (Io=90%)	0.98typ (Io=100%)	0.95typ (Io=100%)
	INRUSH CURRENT[A]	ACIN 100V 16typ (Io=90%) Ta=25°C at cold start ACIN 115V 16typ (Io=100%) Ta=25°C at cold start ACIN 230V 32typ (Io=100%) Ta=25°C at cold start	16typ (Io=90%) Ta=25°C at cold start	16typ (Io=100%) Ta=25°C at cold start	32typ (Io=100%) Ta=25°C at cold start
	LEAKAGE CURRENT[mA]	0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC62368-1 and DEN-AN)			
	VOLTAGE[V]	12	15	24	36
	CURRENT[A]	ACIN 85-115V Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) ACIN 115V-264V 12.5	10	6.4	4.2
	WATTAGE[W]	ACIN 85-115V Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) ACIN 115V-264V 150.0	150.0	153.6	151.2
OUTPUT	LINE REGULATION[mV]	*4 48max	60max	96max	144max
	LOAD REGULATION [mV]	Io=30 to 100% 100max Io=0 to 30% Burst operation (Please contact us about detail)	120max	150max	150max
	RIPPLE[mVp-p]	0 to +40°C 120max -10 to 0°C 160max Io: load factor Io=0 to 30% 500max	120max	120max	150max
	RIPLINE NOISE[mVp-p]	0 to +40°C 150max -10 to 0°C 180max Io: load factor Io=0 to 30% 600max	150max	180max	200max
	TEMPERATURE REGULATION[mV]	0 to +40°C 120max -10 to +40°C 180max	150max	240max	360max
	DRIFT[mV]	*2 48max	60max	96max	144max
	START-UP TIME[ms]	500typ (ACIN 115V, Io=100%) Ta=25°C			
	HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)			
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	32.40 to 39.60
	OUTPUT VOLTAGE SETTING[V]	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically			
	OVERVOLTAGE PROTECTION[V]	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	41.40 to 50.40
	OPERATING INDICATION	LED (Green)			
	REMOTE SENSING	Not provided			
ISOLATION	REMOTE ON/OFF	Optional (Required external power source. Option -R)			
	INPUT-OUTPUT • RC	*9 AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)			
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)			
	OUTPUT • RC-FG	*9 AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)			
ENVIRONMENT	OUTPUT-RC	*9 AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)			
	OPERATING TEMP., HUMID. AND ALTITUDE	*5 -20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max			
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max			
	VIBRATION	10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axes			
SAFETY AND NOISE REGULATIONS	IMPACT	196.1m/s² (20G), 11ms, once each X, Y and Z axes			
	AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN62368-1, UL508 (Except option -J) Complies with DEN-AN			
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B			
	HARMONIC ATTENUATOR	*8 Complies with IEC61000-3-2 class A			

## SPECIFICATIONS

OTHERS	CASE SIZE/WEIGHT	41 X 97 X 129mm [1.61 X 3.82 X 5.08 inches] (Excluding terminal block and screw) (W X H X D) / 600g max
	COOLING METHOD	Convection
WARRANTY	WARRANTY	*6 5 years (subject to the operating conditions)

\*1 This is the result of measurement of the testing board with capacitors of 22  $\mu$  F and 0.1  $\mu$  F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103.

See 1.6 of Instruction Manual for more details.

When the load factor is 0 - 30%, the switching power loss is reduced by burst operation, which will cause ripple and ripple noise to go beyond the specifications.

\*2 Drift is the change in DC output for an eight hour period after a half-

hour warm-up at 25°C.

\*3 As for DC input, consult us for advice.

\*4 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at 30% load or less.

\*5 Output power derating is required. See 3.2 in Instruction Manual.

\*6 See 3.3 in Instruction Manual for more details.

\*7 Consult us about safety agency approvals for the models with optional functions.

\*8 Consult us about other classes.

\*9 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.

\* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.


\* Parallel operation is not possible with this mode.

\* Sound noise may be heard from the power supply when used for pulse load.

## Features


- Compact design (Depth: 129mm 5.08inches)
- High efficiency (90%typ PLA150F-24, AC230Vin, 100% load)
- Low power consumption (1.5W typ AC240Vin, no load at standard model)
- UL508 approved (Except option -J), and complies with SEMI F47 (see instruction manual 1.1)
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

## Block diagram

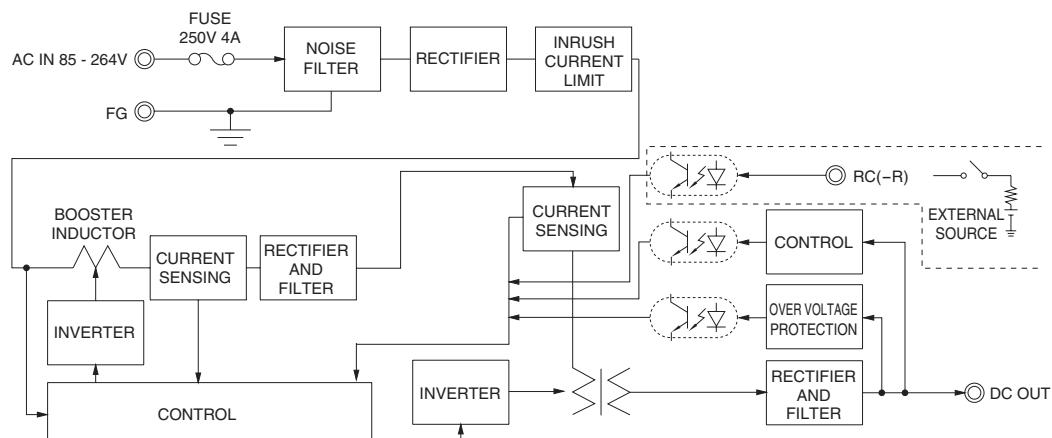

## External view

The external size of -R option, -J option, -N1 option and -T option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

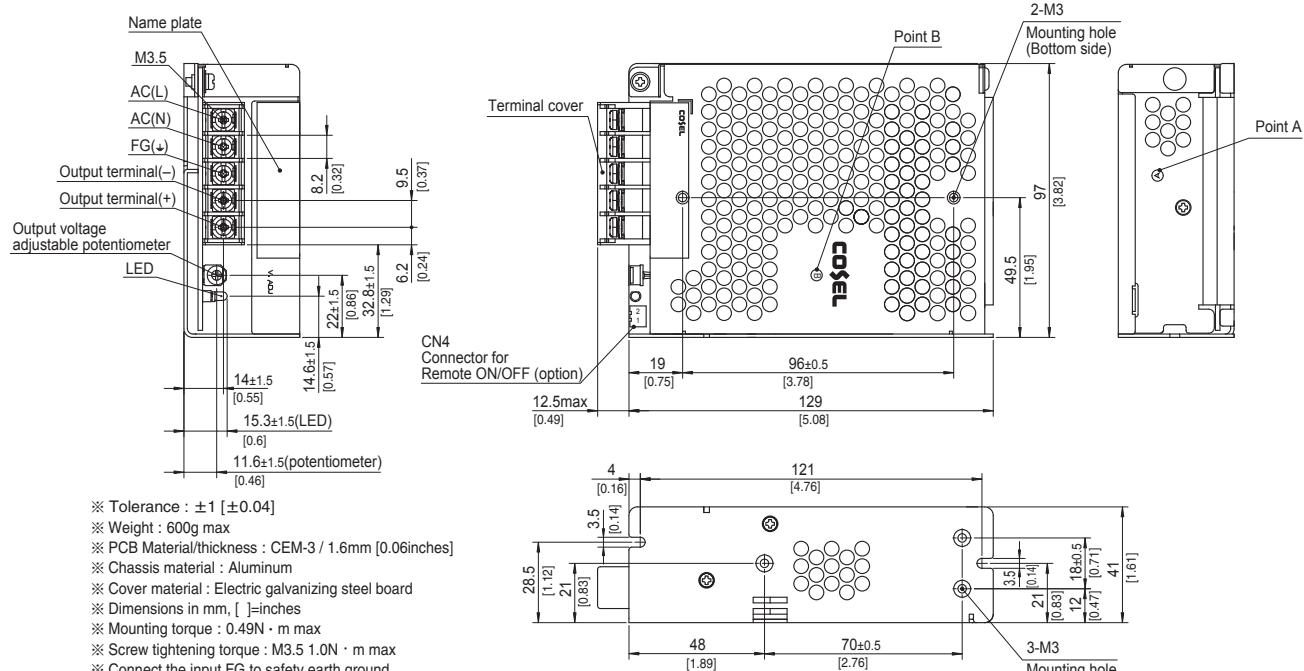

※ Tolerance :  $\pm 1$  [ $\pm 0.04$ ]

※ Weight : 600g max

※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]

※ Chassis material : Aluminum

※ Cover material : Electrical galvanizing steel board

※ Dimensions in mm, [ ]=inches

※ Mounting torque : 0.49N · m max

※ Screw tightening torque : M3.5 1.0N · m max

※ Connect the input FG to safety earth ground.

## PLA300F

## Ordering information

PL A 300 F - □ - □① ② ③ ④ ⑤ ⑥ ⑦ ⑧

RoHS

Example recommended EMI/EMC filter  
NAC-06-472

High voltage pulse noise type : NAP series

Low leakage current type : NAM series

\* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

① Series name

② Single output

③ Output wattage

④ Universal input

⑤ Output voltage

⑥ Optional \*7

C: with Coating

G: Low leakage current

V: External potentiometer for output voltage adjustment

U: Low input voltage stop (Complies with SEMI F-47)

R: Remote on/off (Required external power source)

F4: Low speed fan

T2: Horizontal terminal block (non-screw-hold type)

See 5.1 in Instruction Manual.

\* Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

## SPECIFICATIONS

	MODEL	PLA300F-5	PLA300F-12	PLA300F-15	PLA300F-24	PLA300F-36	PLA300F-48	
INPUT	VOLTAGE[V]	AC85 - 264 1φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3						
	CURRENT[A]	ACIN 100V	3.1typ (Io=90%)	3.4typ (Io=90%)				
		ACIN 115V	3.0typ (Io=100%)	3.3typ (Io=100%)				
		ACIN 230V	1.5typ (Io=100%)	1.7typ (Io=100%)				
	FREQUENCY[Hz]	50 / 60 (47 - 63)						
	EFFICIENCY[%]	ACIN 100V	73typ (Io=90%)	78typ (Io=90%)	79typ (Io=90%)	81typ (Io=90%)	81typ (Io=90%)	82typ (Io=90%)
		ACIN 115V	74typ (Io=100%)	78typ (Io=100%)	80typ (Io=100%)	82typ (Io=100%)	82typ (Io=100%)	83typ (Io=100%)
		ACIN 230V	77typ (Io=100%)	81typ (Io=100%)	83typ (Io=100%)	86typ (Io=100%)	86typ (Io=100%)	86typ (Io=100%)
	POWER FACTOR	ACIN 100V	0.98typ (Io=90%)					
		ACIN 115V	0.98typ (Io=100%)					
ACIN 230V		0.95typ (Io=100%)						
INRUSH CURRENT[A]	ACIN 100V	20typ (Io=90%) Ta=25°C at cold start						
	ACIN 115V	20typ (Io=100%) Ta=25°C at cold start						
	ACIN 230V	40typ (Io=100%) Ta=25°C at cold start						
LEAKAGE CURRENT[mA]	0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC62368-1 and DEN-AN)							
OUTPUT	VOLTAGE[V]	5	12	15	24	36	48	
	CURRENT[A]	ACIN 85-115V	Output derating is required at ACIN 115V or less (refer to instruction manual 3.2)					
		ACIN 115V-264V	50	25	20	12.5	8.4	6.3
	WATTAGE[W]	ACIN 85-115V	Output derating is required at ACIN 115V or less (refer to instruction manual 3.2)					
		ACIN 115V-264V	250	300	300	300	302.4	302.4
	LINE REGULATION[mV] *4	20max	48max	60max	96max	144max	192max	
	LOAD REGULATION[mV] *4	40max	100max	120max	150max	150max	300max	
	RIPPLE[mVp-p] *1	0 to +50°C	80max	120max	120max	150max	150max	
	RIPPLE NOISE[mVp-p] *1	-10 to 0°C	140max	160max	160max	160max	400max	
	TEMPERATURE REGULATION[mV] *1	0 to +50°C	120max	150max	150max	200max	200max	
*1 -10 to 0°C	160max	180max	180max	180max	240max	500max		
DRIFT[mV] *2	0 to +50°C	50max	120max	150max	240max	360max		
*2 -10 to +50°C	75max	180max	180max	290max	440max	600max		
START-UP TIME[ms]	300typ (ACIN 115V, Io=100%)							
HOLD-UP TIME[ms]	20typ (ACIN 115V, Io=100%)							
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	4.50 to 5.50	10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	32.40 to 39.60	43.20 to 52.80		
OUTPUT VOLTAGE SETTING[V]	5.00 to 5.15	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92		
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically						
	OVERVOLTAGE PROTECTION[V]	5.75 to 7.00	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	41.40 to 50.40	55.20 to 67.20	
	OPERATING INDICATION	LED (Green)						
	REMOTE SENSING	Not provided						
REMOTE ON/OFF	Optional (Required external power source. Option -R)							
ISOLATION	INPUT-OUTPUT • RC	*10	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)					
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)						
	OUTPUT • RC-FG	*10	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)					
	OUTPUT-RC	*10	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)					
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE *5	-20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max						
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max						
	VIBRATION	10 - 55Hz, 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axes						
	IMPACT	196.1m/s <sup>2</sup> (20G), 11ms, once each X, Y and Z axes						
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN62368-1 Complies with DEN-AN						
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B						
	HARMONIC ATTENUATOR *9	Complies with IEC61000-3-2 class A						

## SPECIFICATIONS

OTHERS	CASE SIZE/WEIGHT	102 X 41 X 190mm [4.02 X 1.61 X 7.48 inches] (Excluding terminal block and screw) (W X H X D) / 1.0kg max
	COOLING METHOD	*8 Forced cooling (internal fan)
WARRANTY	WARRANTY	*6 5 years (subject to the operating conditions)

\*1 This is the result of measurement of the testing board with capacitors of 22  $\mu$  F and 0.1  $\mu$  F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103. See 1.6 of Instruction Manual for more details.

\*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

\*3 Output power derating is required. As for DC input, consult us for advice.

\*4 Consult us about dynamic load and input response.

\*5 See 3.2 in Instruction Manual.

\*6 See 3.3 in Instruction Manual for more details.

\*7 Consult us about safety agency approvals for the models with optional functions.

\*8 The fan speed slows down at no load.

\*9 Consult us about other classes.

\*10 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.

\* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.


\* Parallel operation is not possible with this mode.

\* Sound noise may be heard from the power supply when used for pulse load.

## Features


- Cost-effective
- Longer life (see Instruction Manual)
- Low profile (meets 1U height = 41 mm or 1.61 inches)
- Wide operating temperature range (-20°C to +70°C see instruction manual)
- Screw hold type terminal block
- Slow fan speed at no load
- Many optional functions
- Complies with SEMI F-47 (-U option, see Instruction Manual for details)

## Block diagram


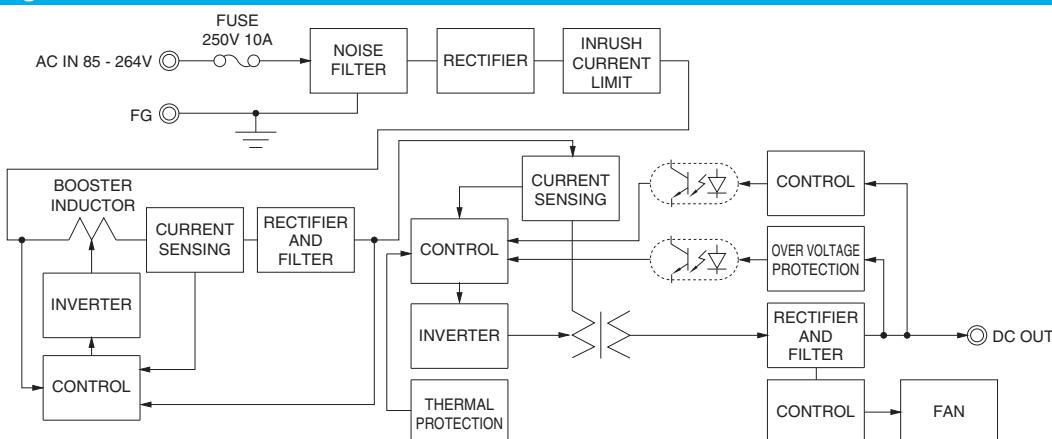


## External view

The external size of -V option, -R option, and -T2 option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

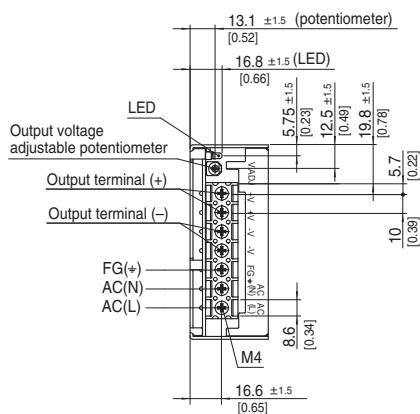

- Tolerance : ±1 [±0.04]
- Weight : 1.0kg max
- PCB Material/Thickness : CEM-3 / 1.6mm [0.06inches]
- Chassis material : Aluminum
- Case material : Electric galvanizing steel board
- Dimensions in mm, [ ]-inches
- Mounting torque : 1.2N · m max
- Screw tightening torque : 1.6N · m max
- Connect the input FG to safety earth ground.

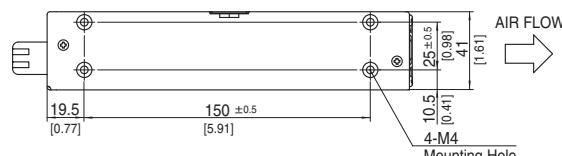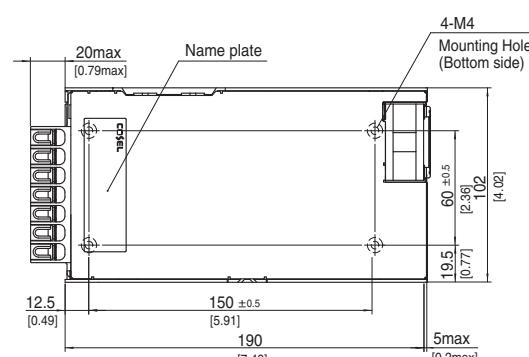

## PLA600F

## Ordering information

PL 1 A 2 600 3 F 4 - 5 - 6

RoHS



Example recommended EMI/EMC filter  
NAC-16-472



High voltage pulse noise type : NAP series  
Low leakage current type : NAM series  
\* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional \*7
  - C : with Coating
  - G : Low leakage current
  - V : External potentiometer for output voltage adjustment
  - U : Low input voltage stop (Complies with SEMI F-47)
  - W: Parallel operation, LV alarm Remote sensing
  - R : Remote on/off (Required external power source)
  - F4: Low speed fan
  - T2: Horizontal terminal block (non-screw-hold type)

See 5.1 in Instruction Manual.

\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

\*Please consider "PJA600F-5" about 5V output.

## SPECIFICATIONS

MODEL	PLA600F-12	PLA600F-15	PLA600F-24	PLA600F-36	PLA600F-48	
INPUT	<b>VOLTAGE[V]</b>	AC85 - 264 1φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *4				
	ACIN 100V	6.7typ (Io=90%)				
	ACIN 115V	6.5typ (Io=100%)				
	ACIN 230V	3.2typ (Io=100%)				
	<b>FREQUENCY[Hz]</b>	50 / 60 (47 - 63)				
	ACIN 100V	81typ (Io=90%)	81typ (Io=90%)	84typ (Io=90%)	85typ (Io=90%)	85typ (Io=90%)
	ACIN 115V	81typ (Io=100%)	81typ (Io=100%)	84typ (Io=100%)	85typ (Io=100%)	85typ (Io=100%)
	ACIN 230V	84typ (Io=100%)	84typ (Io=100%)	88typ (Io=100%)	88typ (Io=100%)	88typ (Io=100%)
	ACIN 100V	0.98typ (Io=90%)				
	ACIN 115V	0.98typ (Io=100%)				
	ACIN 230V	0.95typ (Io=100%)				
OUTPUT	<b>INRUSH CURRENT[A]</b>	ACIN 100V	20/40typ (Io=90%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start)			
	ACIN 115V	20/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start)				
	ACIN 230V	40/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start)				
	<b>LEAKAGE CURRENT[mA]</b>	1.5max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC62368-1 and DEN-AN)				
	<b>VOLTAGE[V]</b>	12	15	24	36	48
	<b>CURRENT[A]</b>	ACIN 85-115V	Output derating is required at ACIN 115V or less (refer to instruction manual 3.2)			
	ACIN 115V-264V	50	40	25	16.7	12.5
	<b>WATTAGE[W]</b>	ACIN 85-115V	Output derating is required at ACIN 115V or less (refer to instruction manual 3.2)			
	ACIN 115V-264V	600	600	600	601.2	600
	<b>LINE REGULATION[mV]</b> *8	48max	60max	96max	144max	192max
PROTECTION CIRCUIT AND OTHERS	<b>LOAD REGULATION[mV]</b> *8	100max	120max	150max	150max	300max
	<b> RIPPLE[mVp-p]</b> *1	0 to +50°C	120max	120max	120max	150max
		-20 to 0°C	160max	160max	160max	400max
	<b> RIPPLE NOISE[mVp-p]</b> *1	0 to +50°C	150max	150max	200max	200max
		-20 to 0°C	180max	180max	240max	500max
	<b> TEMPERATURE REGULATION[mV]</b>	0 to +50°C	120max	150max	240max	360max
		-20 to +50°C	180max	180max	290max	440max
	<b>DRIFT[mV]</b> *2	48max	60max	96max	144max	192max
	<b>START-UP TIME[ms]</b>	300typ (ACIN 115V, Io=100%)				
	<b>HOLD-UP TIME[ms]</b>	20typ (ACIN 115V, Io=100%)				
ISOLATION	<b>OUTPUT VOLTAGE ADJUSTMENT RANGE[V]</b>	10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	32.40 to 39.60	43.20 to 52.80
	<b>OUTPUT VOLTAGE SETTING[V]</b>	12.00 to 12.48	15.00 to 15.60	24.00 to 24.96	36.00 to 37.44	48.00 to 49.92
	<b>OVERCURRENT PROTECTION</b>	Works over 105% of rating and recovers automatically				
	<b>OVERVOLTAGE PROTECTION[V]</b>	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	41.40 to 50.40	55.20 to 67.20
	<b>OPERATING INDICATION</b>	LED (Green)				
ENVIRONMENT	<b>REMOTE SENSING</b>	Optional (Option -W)				
	<b>REMOTE ON/OFF</b>	Optional (Required external power source. Option -R)				
	<b>INPUT-OUTPUT • RC</b> *3	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)				
	<b>INPUT-FG</b>	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature)				
SAFETY AND NOISE REGULATIONS	<b>OUTPUT • RC-FG</b> *3	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)				
	<b>OUTPUT-RC</b> *3	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature)				
	<b>OPERATING TEMP, HUMID. AND ALTITUDE</b> *5	-20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max				
	<b>STORAGE TEMP, HUMID. AND ALTITUDE</b>	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max				
	<b>VIBRATION</b>	10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axes				
	<b>IMPACT</b>	196.1m/s² (20G), 11ms, once each X, Y and Z axes				
	<b>AGENCY APPROVALS</b>	UL60950-1, C-UL (CSA60950-1), EN62368-1 Complies with DEN-AN				
	<b>CONDUCTED NOISE</b>	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B				
	<b>HARMONIC ATTENUATOR</b> *10	Complies with IEC61000-3-2 class A				

## SPECIFICATIONS

OTHERS	CASE SIZE/WEIGHT	120×61×215mm [4.72×2.40×8.46 inches] (Excluding terminal block and screw) (W×H×D) / 2.0kg max
	COOLING METHOD	*9 Forced cooling (internal fan)
WARRANTY	WARRANTY	*6 5 years (subject to the operating conditions)

\*1 This is the result of measurement of the testing board with capacitors of 22  $\mu$ F and 0.1  $\mu$ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103.  
See 1.6 of Instruction Manual for more details.

\*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.

\*3 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.

\*4 As for DC input, consult us for advice.

\*5 Output power derating is required. See 3.2 in Instruction Manual.

\*6 See 3.3 in Instruction Manual for more details.

\*7 Consult us about safety agency approvals for the models with optional functions.

\*8 Consult us about dynamic load and input response.

\*9 The fan speed slows down at no load.

\*10 Consult us about other classes.

\* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.


\* Parallel operation is allowed for PLA600F models with the -W option only.

\* Sound noise may be heard from the power supply when used for pulse load.

## Features


- Cost-effective
- Longer life (see Instruction Manual)
- Low profile (meets 2U height = 61 mm or 2.40 inches)
- Wide operating temperature range (-20°C to +70°C see instruction manual)
- Screw hold type terminal block
- Slow fan speed at no load
- Many optional functions
- Complies with SEMI F-47 (-U option, see Instruction Manual for details)

## Block diagram

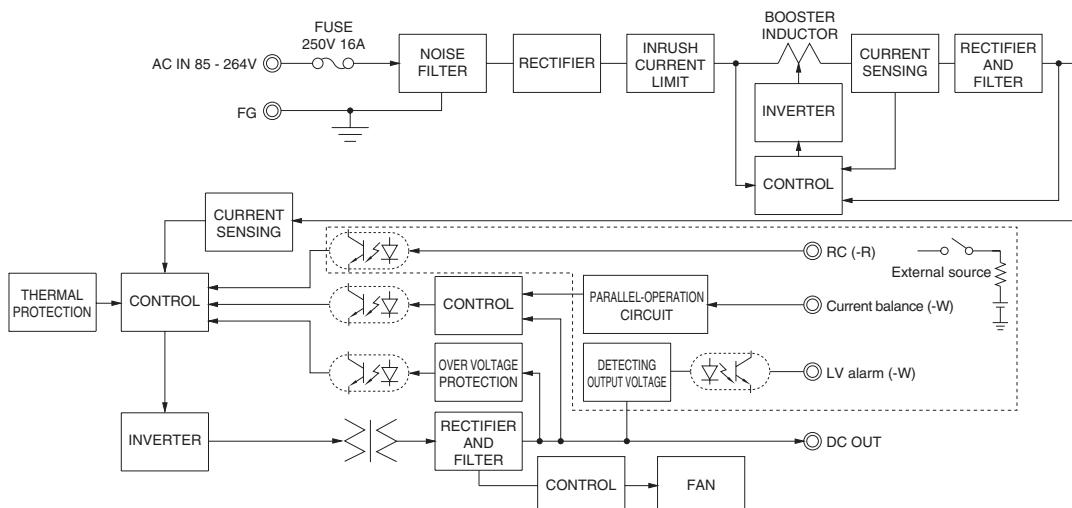

## External view

The external size of -V option, -W option, -R option, and -T2 option is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

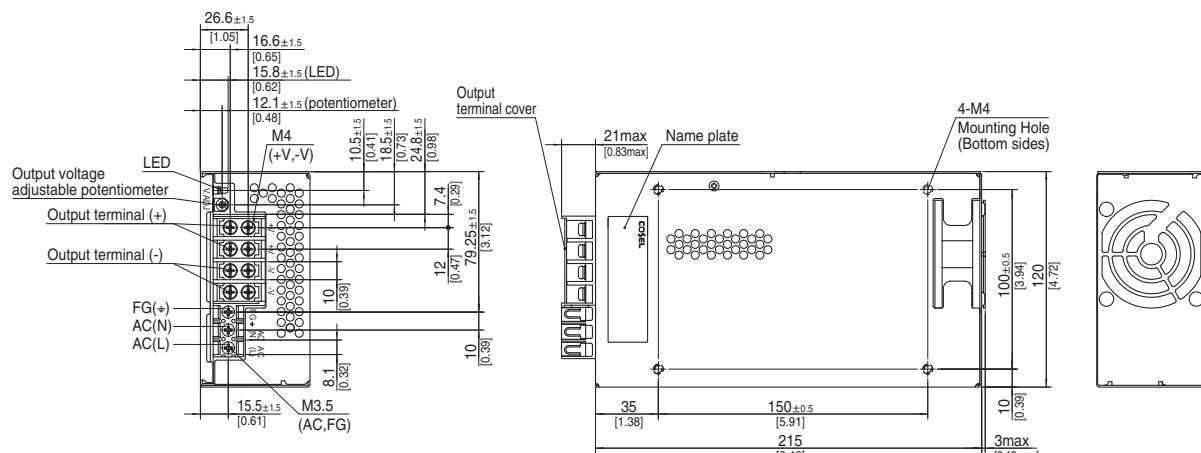

※ Tolerance :  $\pm 1$  [ $\pm 0.04$ ]

※ Weight : 2.0kg max

※ PCB Material/Thickness : FR-4 / 1.6mm [0.06inches]

※ Chassis material : Electric galvanizing steel board

※ Case material : Electric galvanizing steel board

※ Dimensions in mm, [ ]=inches

※ Mounting torque : 1.5N · m max

※ Screw tightening torque : M3.5 0.8N · m max

M4 1.6N · m max

※ Connect the input FG to safety earth ground.