

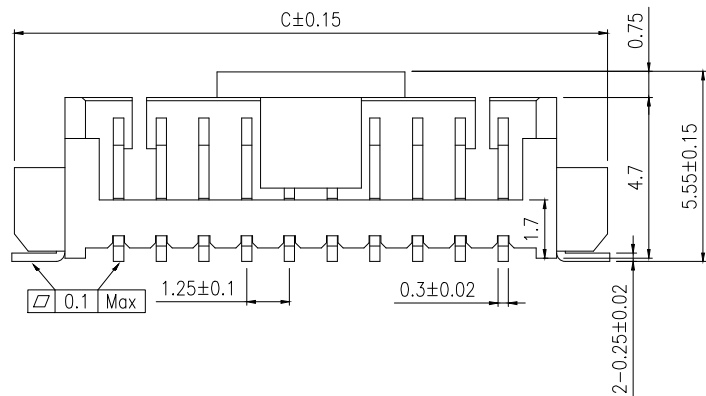
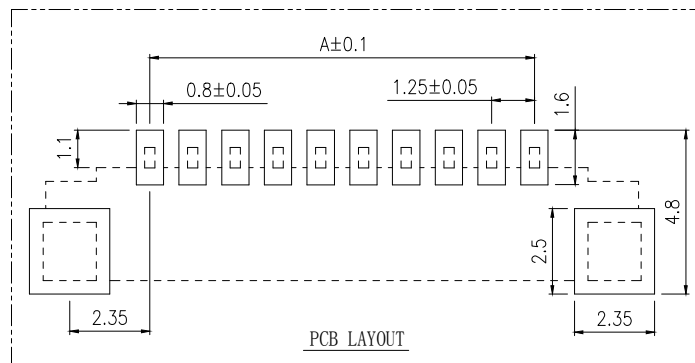
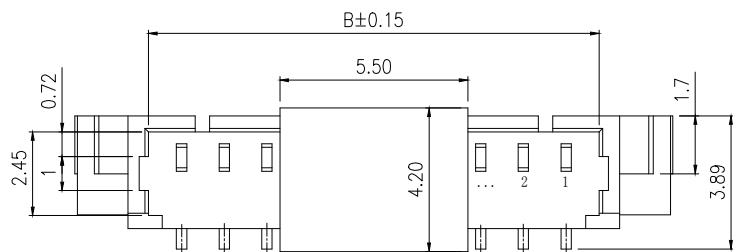


SECTION A-A

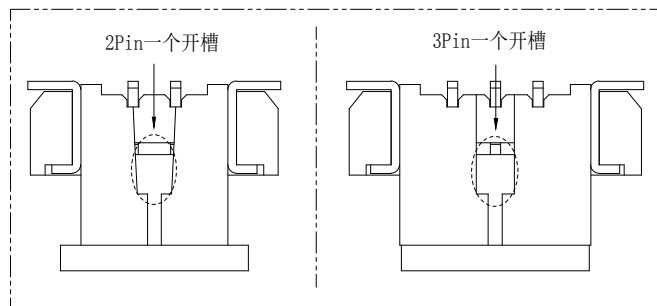


PCB LAYOUT

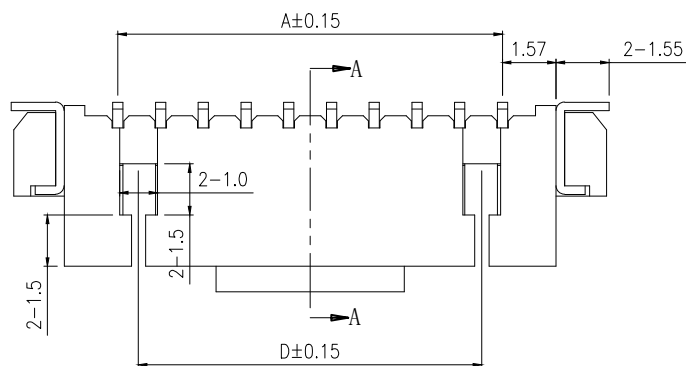

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperatuer Range: -40℃~ +105℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 500mΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material: Wafer LCP UL94-V0
Pin Brass Tin-plated



Circuit	Part NO.	Dimensions mm			
		A	B	C	D
2	HC-1.25-2PLT	1.25	3.10	7.30	/
3	HC-1.25-3PLT	2.50	4.35	8.55	/
4	HC-1.25-4PLT	3.75	5.60	9.80	2.50
5	HC-1.25-5PLT	5.00	6.85	11.10	3.75
6	HC-1.25-6PLT	6.25	8.10	12.30	5.00
7	HC-1.25-7PLT	7.50	9.35	13.60	6.25
8	HC-1.25-8PLT	8.75	10.60	14.90	7.50
9	HC-1.25-9PLT	10.00	11.85	16.10	8.75
10	HC-1.25-10PLT	11.25	13.10	17.35	10.00
11	HC-1.25-11PLT	12.50	14.35	18.60	11.25
12	HC-1.25-12PLT	13.75	15.60	19.85	12.50
13	HC-1.25-13PLT	15.00	16.85	21.10	13.75
14	HC-1.25-14PLT	16.25	18.10	22.35	15.00
15	HC-1.25-15PLT	17.50	19.35	23.60	16.25
16	HC-1.25-16PLT	18.75	20.60	24.85	17.50

Ordering Information

HC-1.25 - N*** - *

Pin Type Colour
Pin 1 1.25 1.25 1.25
Pin 2 1.25 1.25 1.25
Pin 3 1.25 1.25 1.25
Pin 4 1.25 1.25 1.25
Pin 5 1.25 1.25 1.25
Pin 6 1.25 1.25 1.25
Pin 7 1.25 1.25 1.25
Pin 8 1.25 1.25 1.25
Pin 9 1.25 1.25 1.25
Pin 10 1.25 1.25 1.25
Pin 11 1.25 1.25 1.25
Pin 12 1.25 1.25 1.25
Pin 13 1.25 1.25 1.25
Pin 14 1.25 1.25 1.25
Pin 15 1.25 1.25 1.25
Pin 16 1.25 1.25 1.25

3	③	接触件	黄铜	N	镀锡
2	②	焊片	黄铜	2	镀锡
1	①	插座	LCP	1	UL94-V0
序号	图号	名称	材料	数量	附件

			GENERAL TOLERANCE	制图	03
			DIM TOL	审核	
			X.X ±0.30	批准	
			X.XX ±0.20	比例	
			X.XXX ±0.10	SCALE	
1	初版发行		Angle ±3.0°	投影	
序号	变更内容	日期			
No.	MODIFY CONTENT	MODIFY DATE			

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称	1.25 单排 立贴	版本	A
TITLE		REV.	
产品料号	HC-1.25-NPLT	单位	mm
PART NO.		UNITS	
材料		页次	1/1
MATERIAL		SHEET	