THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | 1 | INITIAL RELEASE | 28OCT2016 | RK | SS |
| | A | RELEASED TO PRODUCTION | 21DEC2016 | RK | SS |
| | | | | | |
| | | | | | |

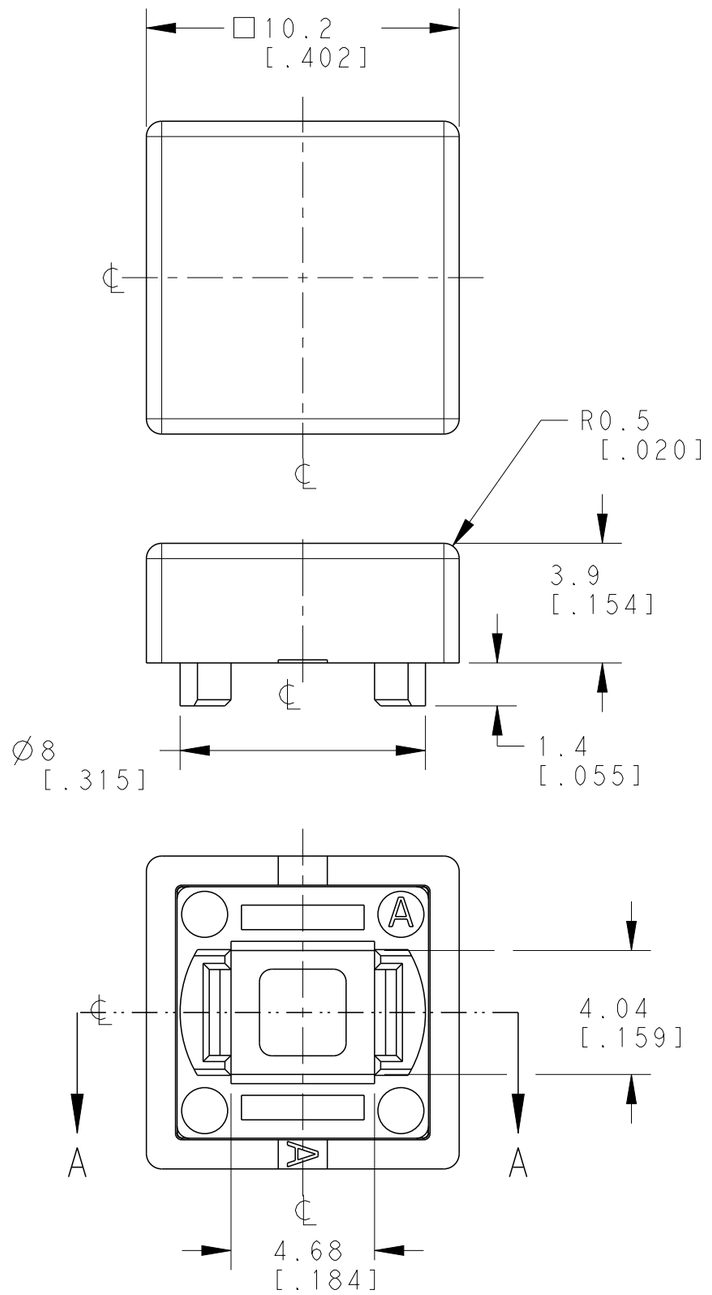


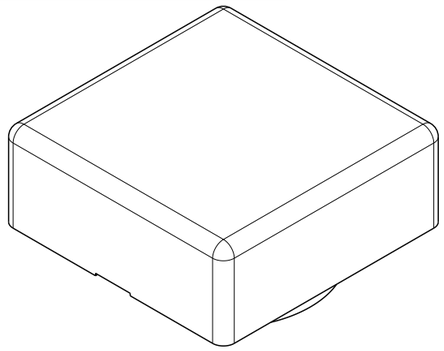

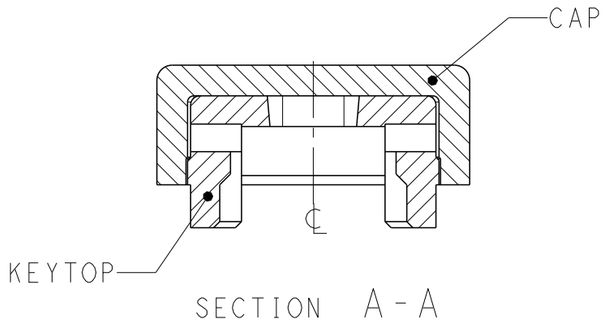


SECTION A-A

SPECIFICATIONS:

MATERIALS
CAP : THERMOPLASTIC PC
KEYTOP : THERMOPLASTIC ABS

ENVIRONMENTAL
OPERATING TEMPERATURE RANGE : -40°C TO +85°C
STORAGE TEMPERATURE RANGE : -40°C TO +85°C

NOTE:

1. CAPS ARE BULK PACKED IN PLASTIC BAGS. BAGS TO BE LABELED WITH THE INFORMATION DEFINED IN TEC-107-115. BAGS SHALL BE SHIPPED IN SUITABLE BOXES AS DEFINED IN TEC-107-115.
2. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003(ROHS).
3. THESE PARTS ARE DESIGNED FOR USE WITH ILLUMINATED TACTILE SWITCHES TE P/N SERIES 2213818-X AND 2213819-X.
4. CAP SHALL BE INSTALLED AFTER SOLDERING THE ILLUMINATED TACTILE SWITCH TO PCB.

| CAP | KEYTOP | TE PART NUMBER |
|---|---|---|
| COLOR | | |
| CLEAR | YELLOW | 2311403-5 |
| CLEAR | BLUE | 2311403-4 |
| CLEAR | RED | 2311403-3 |
| CLEAR | BLACK | 2311403-2 |
| CLEAR | GREEN | 2311403-1 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm[inches]

TOLERANCES UNLESS OTHERWISE SPECIFIED: GENERAL TOLERANCES ±0.3
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: SEE NOTE -
FINISH: - -

DWN RAGHAVENDRA K 28OCT2016
CHK SANJAY S 28OCT2016
APVD PETER OTT 28OCT2016
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME CAP FOR ILLUMINATED TACTILE SWITCH -

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C-2311403 | - |

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV A