

4


3

2

1


LOC HK	DIST 00	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECO-15-003781	12MAR2015	DD	WW
			B1	REVISED PER ECO-20-012739	30SEP2020	AP	WW

22	24	1.85	1.19	2.06	1.65	2.06	1.65
	22	1.85	1.30	2.06	1.80	2.06	1.80
19							
18	20	2.06	1.40	3.05	2.18	3.05	2.28
	18	2.06	1.50	3.05	2.28	3.05	2.44
14	16	2.64	1.70	3.71	2.90		
	14	2.64	1.85	3.71	3.10		
13	18+22	3.05	1.70	5.69			
	20+20	3.05	1.50	5.69			
	18+20	3.05	1.65	5.69			
	18+18	3.05	1.70	5.69			
	16+20	3.05	1.70	5.69			
	16+18	3.05	1.8	5.69			
11	14+20	3.86		6.60			
	14+18	3.86		6.60			
	14+16	3.86		6.60			
	12+20	3.86	1.72	6.60			
	12+18	3.86	1.80	6.60			
10	12	3.45	2.06	5.16	3.80		
	10	3.45	2.21	5.16	4.10		
GRIP CODE	WIRE SIZE (AWG)	CCW CONDUCTOR CRIMP WIDTH (TOL ±0.10)	CCH CONDUCTOR CRIMP HIEGHT (TOL ±0.05)	ICW INSULATION CRIMP WIDTH (THIN WALL) (TOL ±0.10)	ICH INSULATION CRIMP HIEGHT (THIN WALL) (TOL ±0.10)	ICW INSULATION CRIMP WIDTH (STD WALL) (TOL ±0.10)	ICH INSULATION CRIMP HIEGHT (STD WALL) (TOL ±0.10)
RECOMENDED CRIMP DIMENSIONS							




STANDARD REELING DIRECTION

TERMINALS ARE TO BE REELED WITH THE CRIMP GRIPS UP AND TO THE NEAR SIDE. UNWIND DIRECTION FROM RIGHT TO LEFT



REWOUND REELING DIRECTION

TERMINALS ARE TO BE REELED WITH THE CRIMP GRIPS UP AND TO THE NEAR SIDE. UNWIND DIRECTION FROM LEFT TO RIGHT

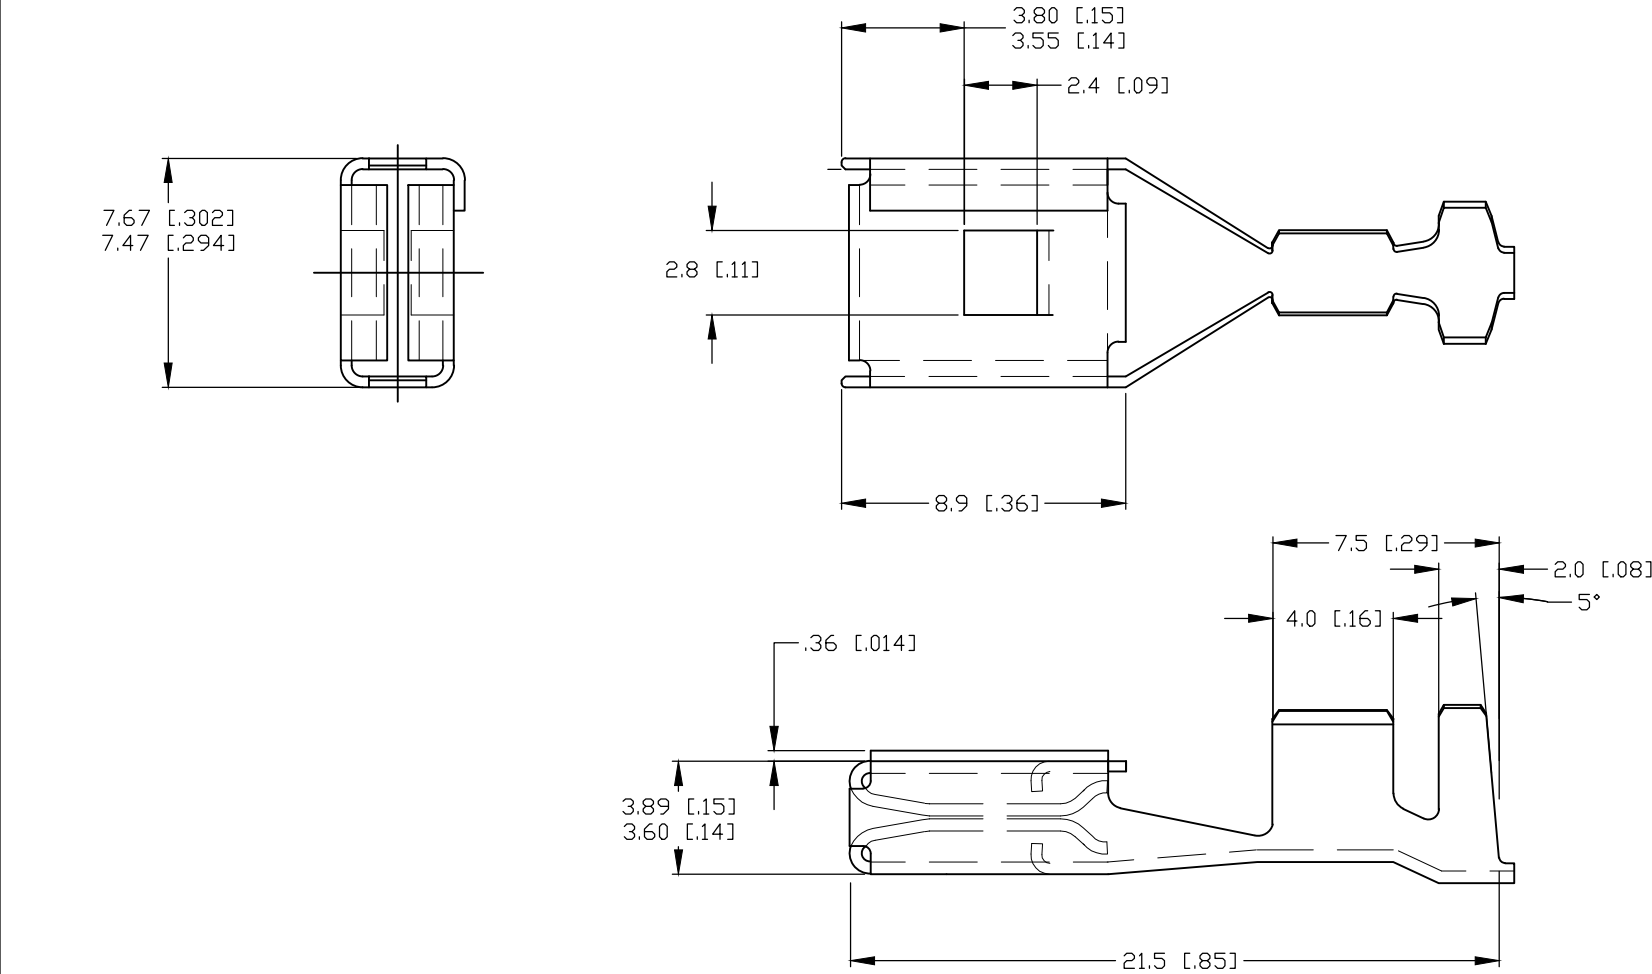

—	2-1438238-3	22	LOW	OBSOLETE
—	2-1438238-2	19	LOW	OBSOLETE
—	2-1438238-0	18	LOW	
—	1438238-8	14	LOW	
—	2-1438238-1	13	LOW	OBSOLETE
—	1-1438238-2	11	LOW	
1-1438238-0	1438238-9	10	LOW	
—	1-1438238-9	19	LOW	
—	1-1438238-1	18	LOW	
—	1438238-3	14	LOW	
—	1438238-4	13	LOW	
—	1438238-5	11	LOW	OBSOLETE
—	1438238-6	10	LOW	
—	1-1438238-3	22	HIGH	OBSOLETE
—	1-1438238-5	19	HIGH	
—	1-1438238-8	18	HIGH	
—	1438238-2	14	HIGH	
—	1-1438238-7	13	HIGH	
—	1-1438238-6	11	HIGH	
—	1-1438238-4	10	HIGH	
TE CONNECTIVITY REWOUND P/N	TE CONNECTIVITY P/N	GRIP CODE	INSERTION FORCE	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR BUSSARD 09 MAY 2003	TE Connectivity			
		CHK DM REVAK 09 MAY 2003				
DIMENSIONS: mm		APVD DM REVAK 09 MAY 2003	NAME			
		PRODUCT SPEC	TERMINAL BLADE TYPE FEMALE			
		APPLICATION SPEC				
MATERIAL —		WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C-1438238	RESTRICTED TO —
		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1	REV B1	