
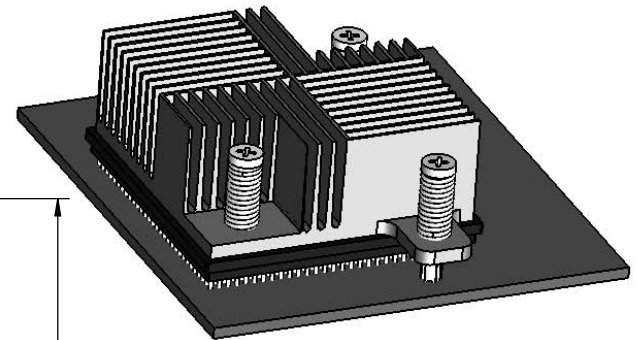
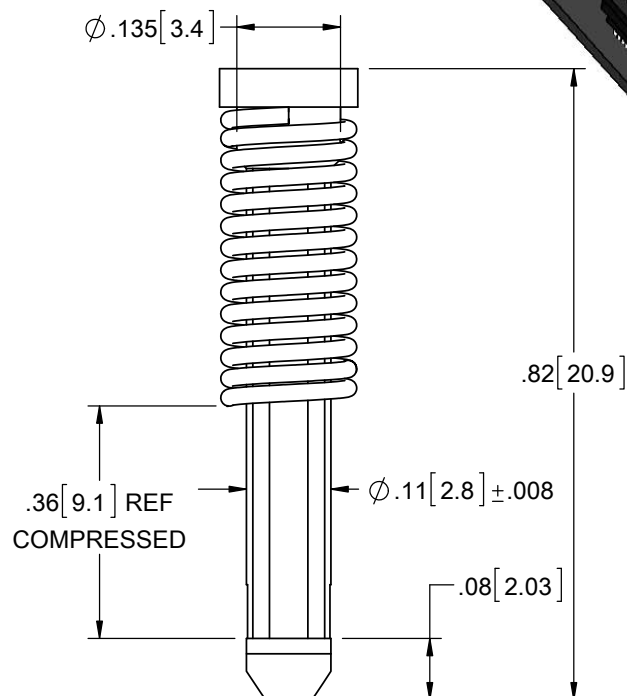


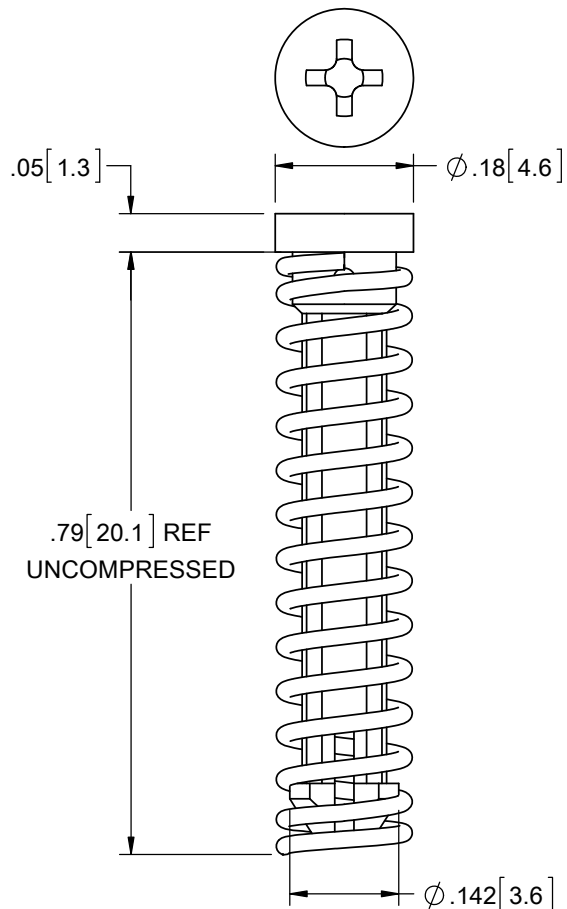

NOTES:

1. MATERIAL: NYLON 6/6 UL 94 V-2 (RMS-047), COLOR: NATURAL
2. SPRING MATERIAL: 304 STAINLESS STEEL (RMS-381)
3. DESIGNED TO SNAP LOCK INTO A $\text{Ø}.122 \pm .002$ [$\text{Ø}3.10 \pm 0.05$] HOLE
4. INSERTS THROUGH A $\text{Ø}.120 \text{--}.140$ [$\text{Ø}3.05 \text{--}3.5$] HOLE IN HEATSINK
5. SPRING RATE: 7 LB/IN REF.
6. PART IS DESIGNED IN INCHES,
MILLIMETER CONVERSIONS ARE PROVIDED FOR REF ONLY

			TITLE: HEAT SINK SPRING MOUNT RIVET						UNITS= IN [mm]	
			CREATED USING SOLIDWORKS	FILE #: HSR-2	DWN: SK	APP: -	FINAL			
			TOLERANCES UNLESS NOTED XX=±.010 XXX=±.005 FRAC.=±1/64 ANG.=±1°	SHEET: 1 OF 1	SHEET SIZE: A	DT: 05/04/11	CHKD: -	PART #		PRINT TYPE
B	SEE CO 200690 FOR CHANGES	SK 07/08/2011	RE: RICHCO, INC.		RICHCO, INC.		HSR-2		CA	
A	RELEASED FOR PRODUCTION	SK 06/30/2011			WWW.RICHCO-INC.COM					
REV.	DESCRIPTION	ENGR. DATE								