

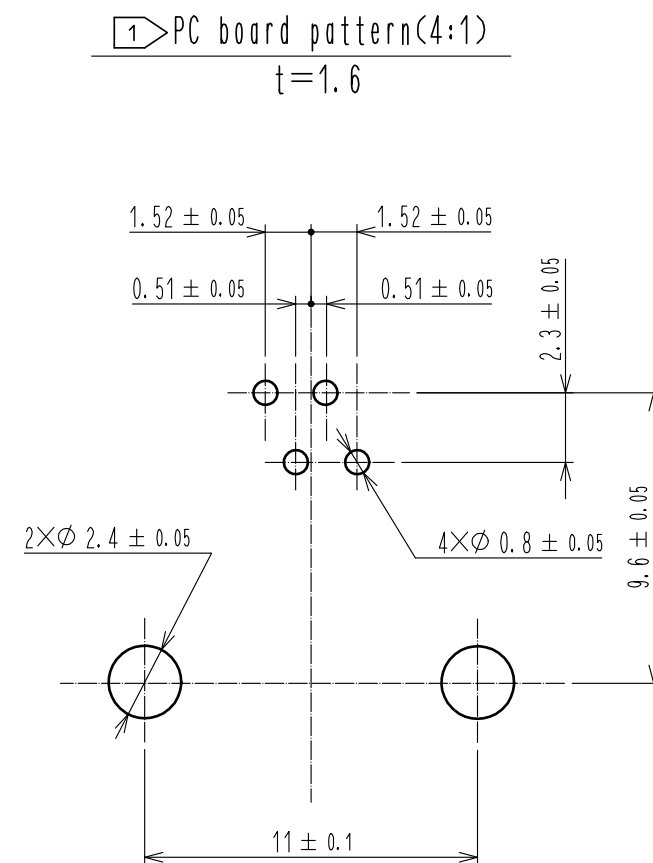
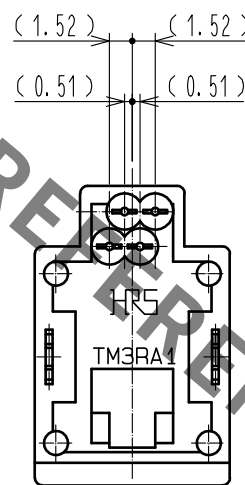
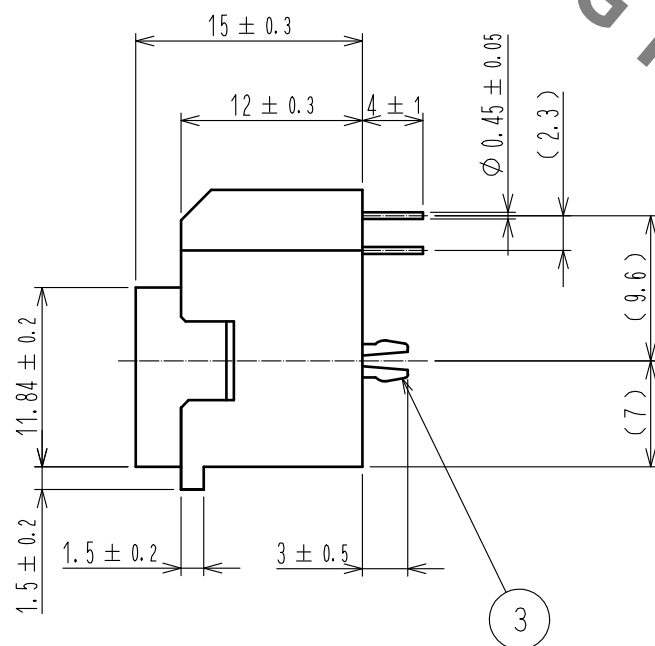

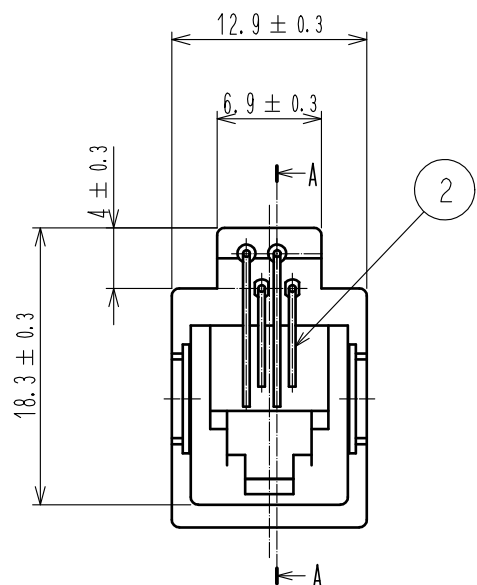




Notes 1 Dimensions are viewed from the connector mounting side on PCB.

2 It shall be plated with Nickel except for the gold plating area.
3. The dimensions in parentheses are for reference.

2	Phosphor bronze	Contact area : Gold plating 1.27 μ m min. Lead : Gold plating 0.03 μ m min. Under : Nickel plating 1.27 μ m min.		5	Styrene elastomer	blue
1	PBT	Black , UL94V-0		4	Rigid polyvinylchloride	Transparency
				3	Copper alloy	Tin plating (Equivalent Phosphor bronze) 1 μ m min.
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	 COUNT	DESCRIPTION OF REVISIONS		DESIGNED
						CHECKED
						DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :RI. TAKAYASU	18.06.12	DRAWING NO. EDC-025815-67-12		
		CHECKED :RI. TAKAYASU	18.06.12	PART NO. TM3RA1-44(67)		
		DESIGNED :MO. SHIMOYAMA	18.06.12	CODE NO. CL222-1374-0-67		
		DRAWN :SJ. SATO	18.06.12			

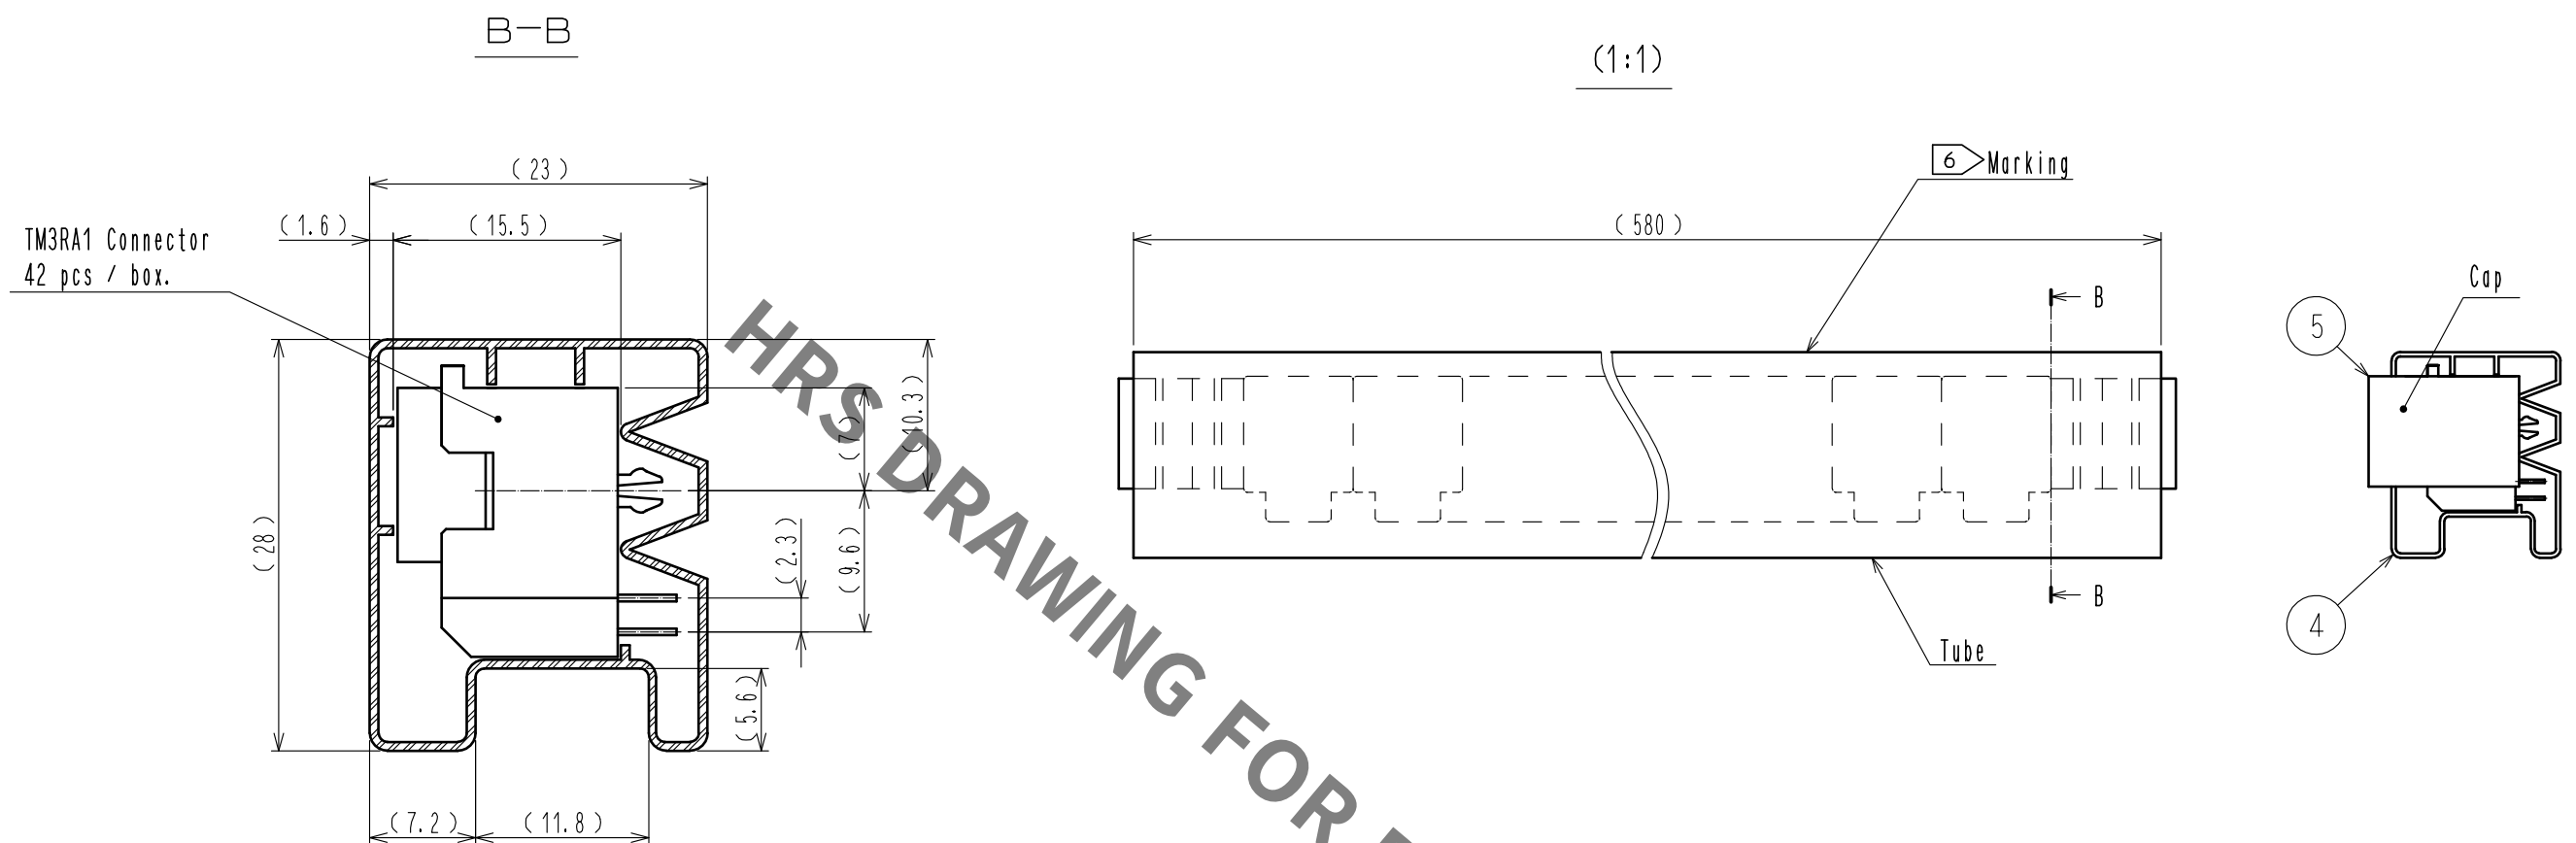

- Notes
4. Tube thickness = 0.6mm
 5. The dimensions in parentheses are for reference.
 6. The following marking are printed on the top of the tube.
TM3RA1シリーズ ヒロセ電機株式会社 空チューブの回収に御協力下さい。
TM3RA1 Series HIROSE ELECTRIC CO.,LTD. Please cooperate with us collect empty the tubes.
 7. After packing connectors, fix both ends of the tube using the cap.

HRS

DRAWING NO.	EDC-025815-67-12
PART NO.	TM3RA1-44(67)
CODE NO.	CL222-1374-0-67

2/2