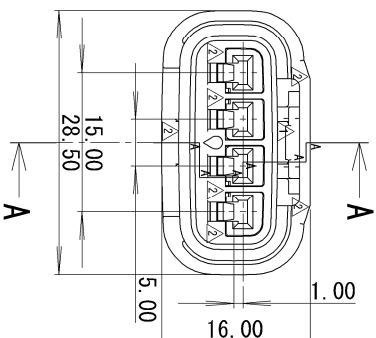



SEC. A-A

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	PART NAME	MATERIAL	COLOR	QTY.
①	SEE TABLE 2	HOUSING	HPA	SEE TABLE 2	1
②	△ 7158-4363	HOLDER	HPA	NATURAL	1
③	△ 7137-2669-80	PACKING	SILICONE RUBBER	BROWN	1

TABLE 2	SUB ASSEMBLY PART NO.	PART NO.
2	AND CH CODE	AND CH

SUB ASSEMBLY PART NO.	PART NO.	COLOR
AND CH. CODE	AND CH. CODE	
7283-7449-15	7183-7449	NATURAL
7283-7449-10-6	7183-7449-10	DARK GRAY
7283-7449-30-6	7183-7449-30	BLACK
7283-7449-40-6	7183-7449-40	LTHT GRAY
7283-7449-80-6	7183-7449-80	BROWN

注記

1. 適用端子品番：7116-4025 ETC.
2. 適用ゴム栓品番：7158-3003-90 ETC.

NOTES

1. APPLICABLE TERMINAL NO. : 7116-4025 ETC.
2. APPLICABLE RUBBER STOPPER NO. : 7158-3003-90 ETC.

						ISSUE MARK	
△ 2016/04/15 CORRECTION OF A CLERICAL ERROR, ETC. C16-P194 Y.H.							
△ 2008/07/29 CHANGED PART NAME, ETC. C08-2518 C.T.							
△ 2000/12/16 CHANGED FORM.(G) C00-M565 G.T.							
△ 1991/05/27 CHANGED FORM.(B) C97-L722 S.S.							
△ 1996/11/28 NEW C96-N173 M.T.							
LET DATE REVISION RECORD NO. CHKD							
GENERAL TOLERANCE							
10MAX 50MAX 100MAX 250MAX 2500IR ANGLE ECCENT							
A ±0.15 ±0.2 ±0.3 ±0.5 ±0.75 ±30° O.1							
B ±0.2 ±0.3 ±0.55 ±0.95 ±1.4 ±30° O.1							
C ±0.3 ±0.5 ±0.8 ±1.4 ±2 ±30° O.15							
SPECIFIED MASS							
2016/04/15							
H. KANDA							
2016/04/15							
R							
DWG TYPE DWG SOURCE DWG DATE UNIT SCL ANGLE							
APPROVED CHECKED CHECKED DESIGN DRAWN							
Y. OHYA Y. HANA I							
1996/08/20 2016/04/15							
MATL. SPEC. SEE TABLE 1 TREAT. & FIN.							
NAME △ 2.3 II 4P SEALED							
HOUSING FEMALE SUB ASSEMBLY							
PART NO. 7283-7449 ETC. △							
DWG NO. 7283-7449 : R △							
SET DWG NO.							
YAZAKI CORPORATION							