

*MESSRS.*SPECIFICATION FOR APPROVAL
承 认 书


Product	DYNAMIC SPEAKER
Part No.	HDK-3608BB-6C (RoHS)
Customer	
Customer Part No.	A10

Approved By	Checked By	Made By
王台平 DEC-18-2020	曹丽萍 DEC-18-2020	LILY DEC-18-2020

常州华龙电子有限公司
DRAGONSTATE ELECTRONIC CORPORATION

中国江苏省常州市新区电子园新四路 36 号

Tel: +86-519-85110078. 86-519-85106698, Fax: +86-519-85101081

[illegible]

1. SPECIFICATION

HDK-3608BB-6C (RoHS)

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 36 mm	
03	Rated Input Power	1.0W	
04	Max. Input Power	1.2W	
05	Impedance	8 ohm $\pm$ 15% at 1500Hz.	
06	Resonance Frequency (Fo)	500Hz $\pm$ 20% at Fo, 1V	
07	Sensitivity (S.P.L.)	99dB (1.0W / 0.1m) $\pm$ 3 dB	At AVE 0.6K, 0.8K, 1.0K, 1.2KHz.
08	Frequency Range	Fo - 10KHz	
09	Total Harmonics Distortion	Max 8 % at 1 KHz, 1.0W.	
10	Voice Coil	Diameter 13.3 mm	
11	Magnet	Rare earth permanent (Nd-Fe-B) magnet Φ 12.5*2.0 mm	
12	Weight	17.8g $\pm$ 0.5g	
13	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
14	Operation Test	Must be normal at program source - 1.0W	
15	Buzz, Rattle, etc.	Should not be audible at 2.83V sine Wave between Fo to 20KHz	
16	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
17	Terminal Strength	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.	
18	Temperature	Operating temperature: -20°C to +60°C Storage temperature: -30°C to +70°C	

Test Condition

STANDARD

Temperature : 15 ~ 35°C

Relative humidity : 25% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

BASICTemperature : $20 \pm 3^\circ\text{C}$

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

Standard Test Fixture


1. Input Power : 1.0W (2.83V)

2. Zero Level : -dB

3. Mode : SPEAKER


4. potentiometer Range : 50dB

5. Sweep Time : 0.5sec

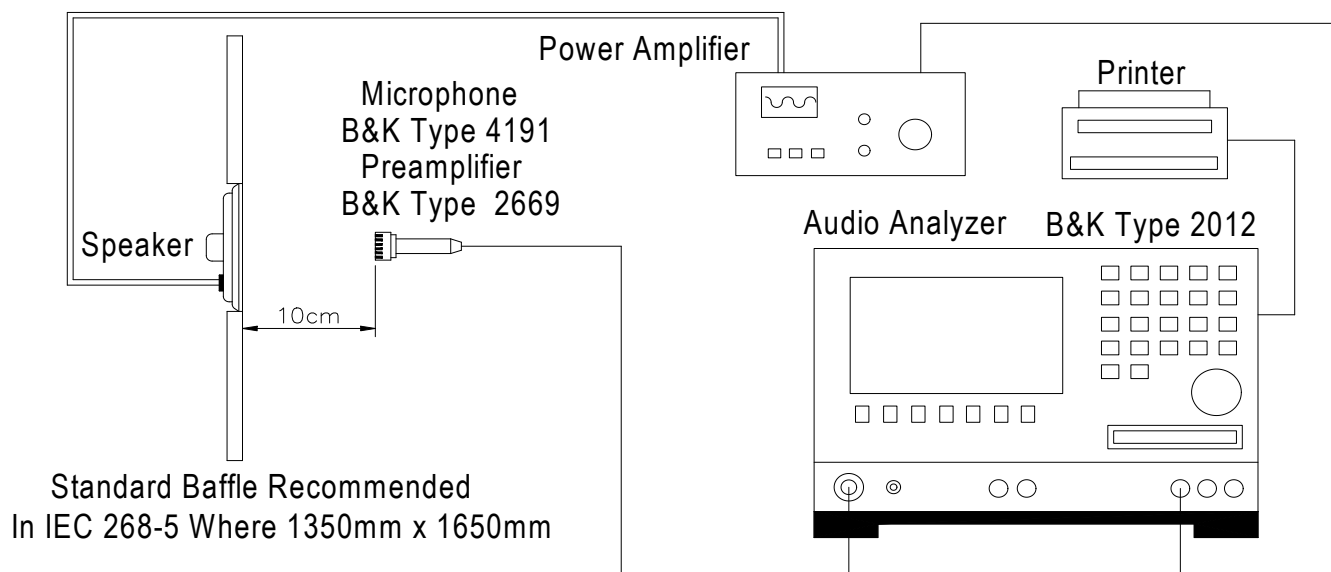


Frequency Response Curve

X:1.250kHz *Y:97.11dB ZA:Live Curve SSR Fund.

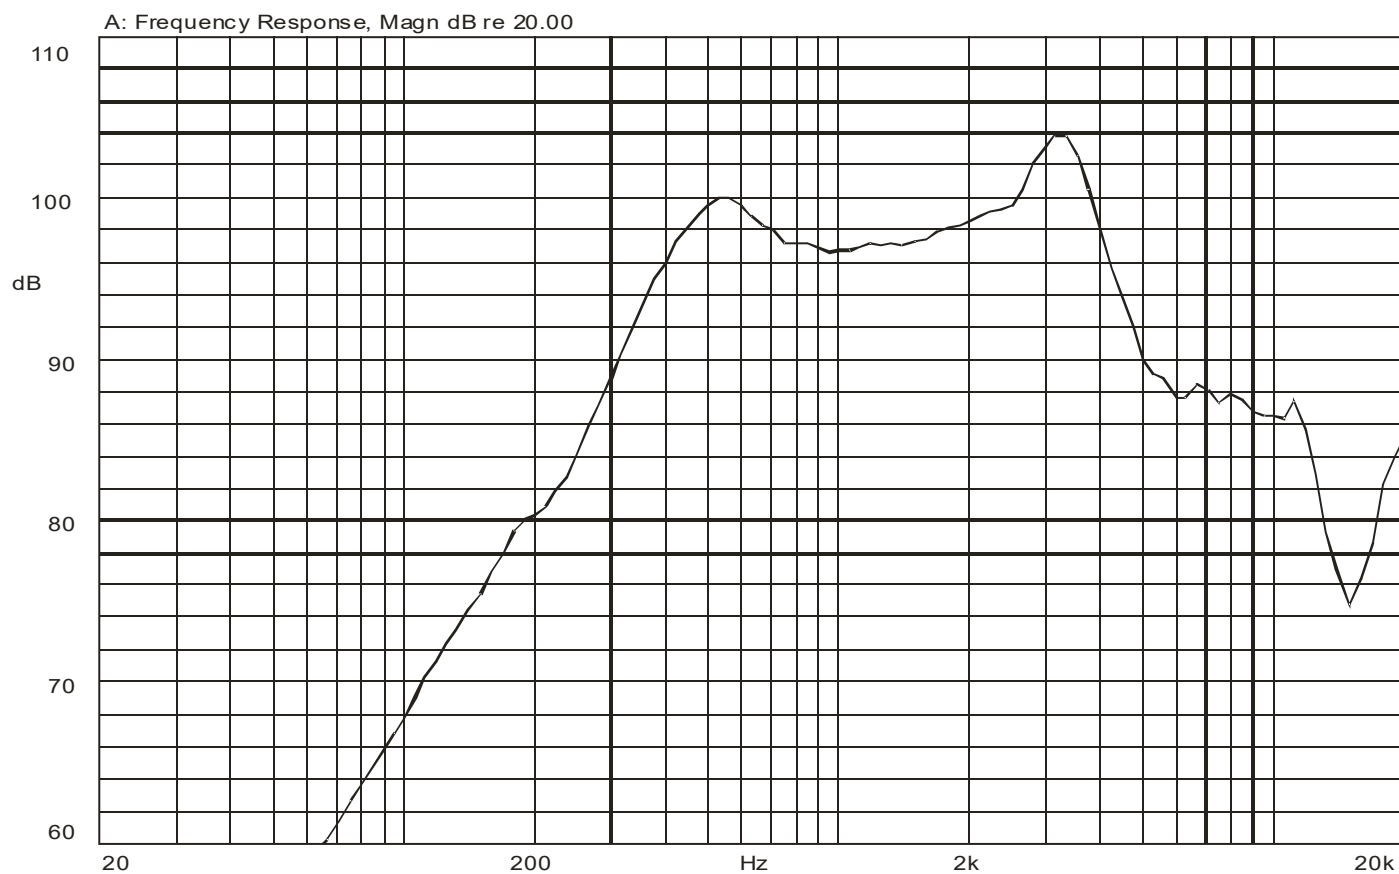


Mode: SPEAKER



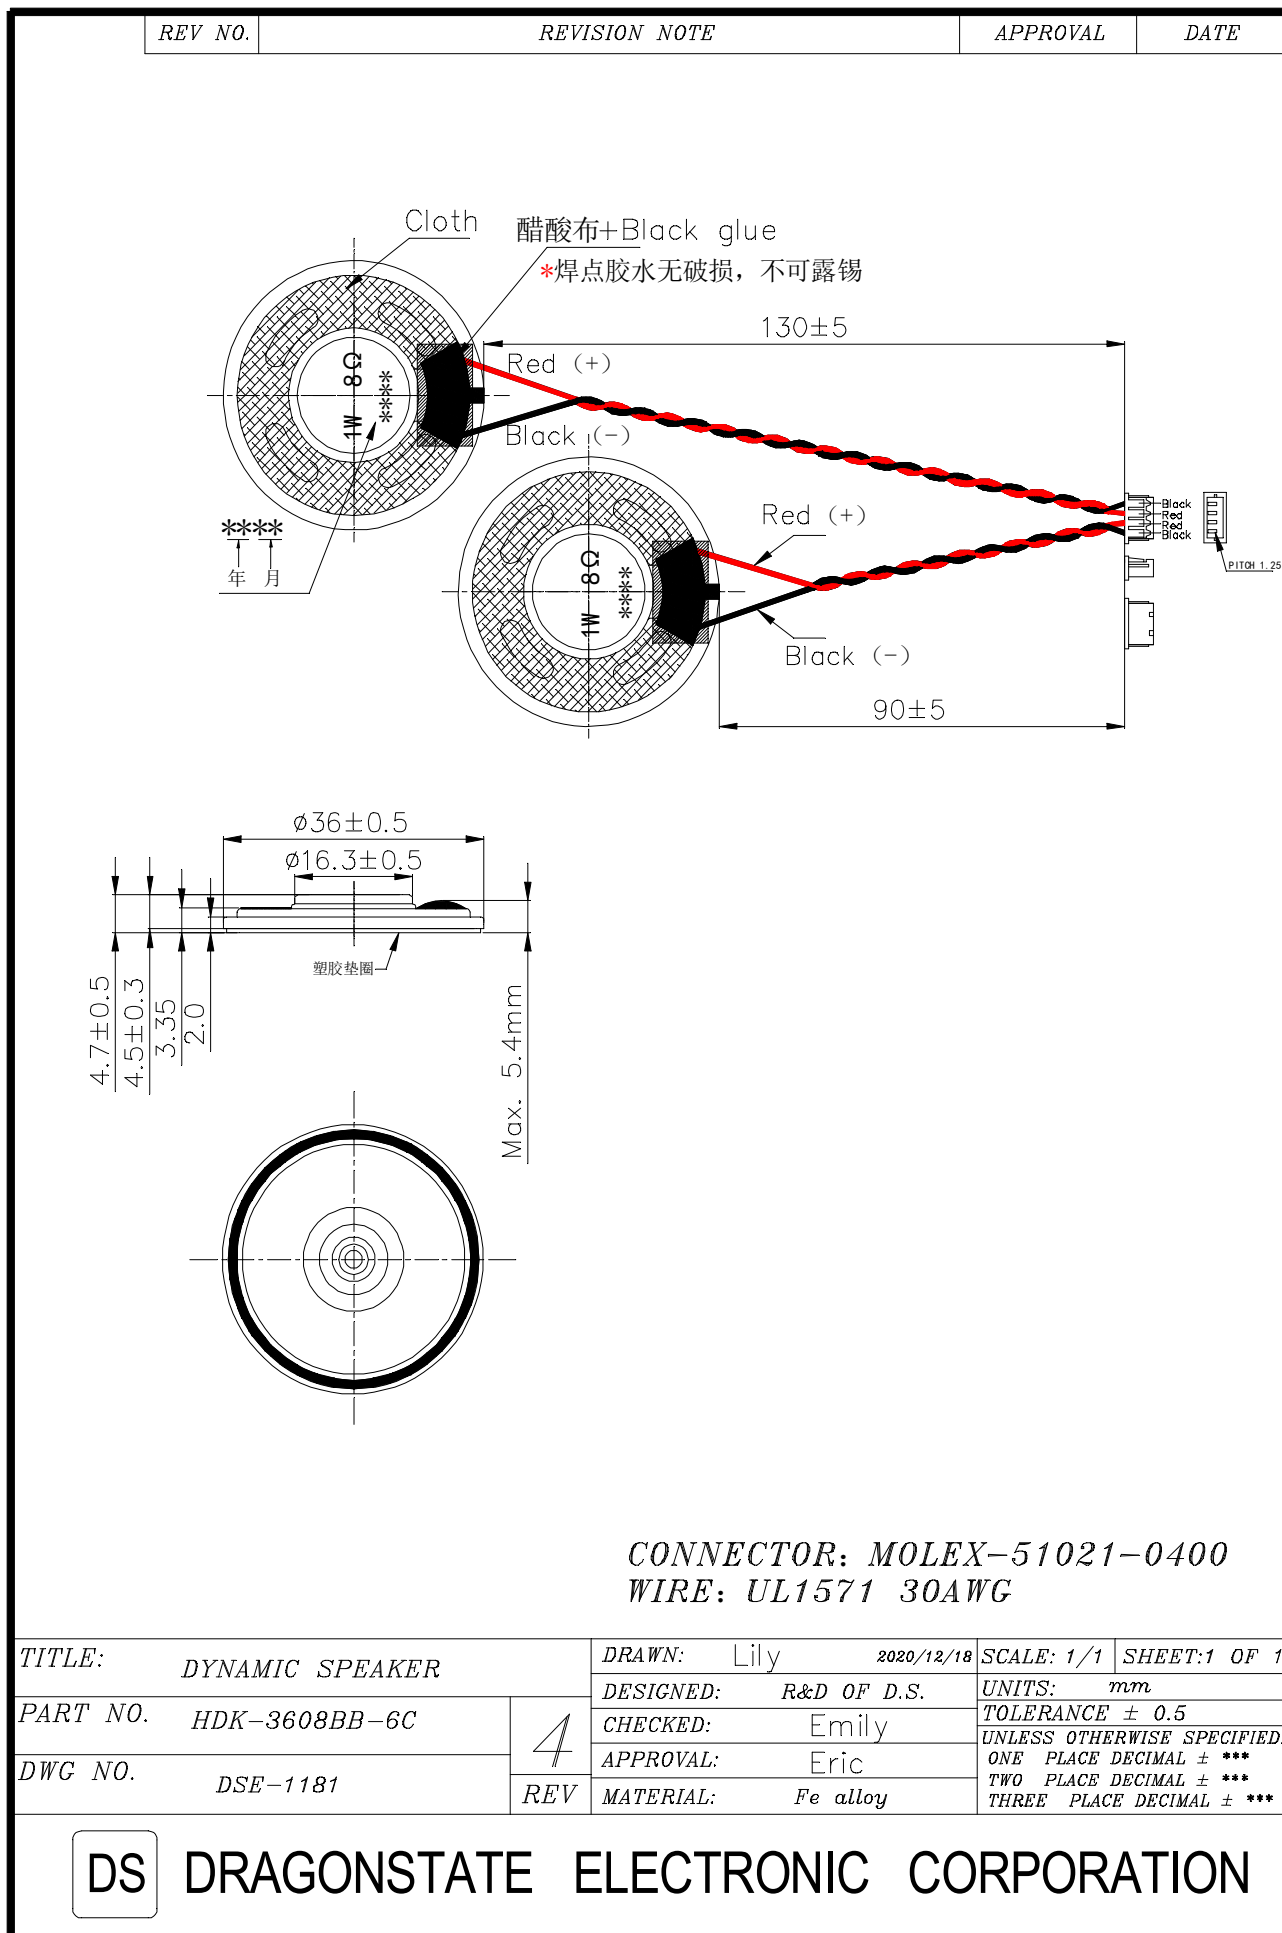

RELIABILITY TESTS

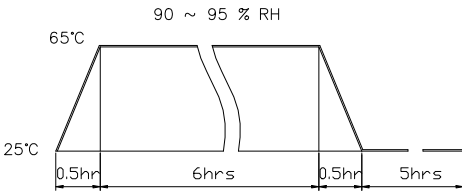Items.		Specifications
01	High temp. Test	Keep 96 hours at $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+60^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of; 
05	Thermal cycle test.	Low temperature: $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$, temperature: $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$, cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration	10~200~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test	Fix on jig. Then drop from 152cm height to the concrete floor X, y, z 6 direction. 5 times each, total 30 times.
08	Free drop test	Free drop from 100cm height to the concrete floor X, y, z 6 direction. 1 times each, total 6 times.
09	Rated Power test	Rated Power white noise is applied for 96 hours
10	Max Power test	Max power 1 min on - 2 min off 10 cycles.
11	Terminal strength test	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.
Criterion: After these test , the change of S.P.L shall be within ± 3 dB .		

SOLDERING CONDITION

Recommend using constant branding iron in 15 ~ 30W, and in temperature range $350 \pm 10^{\circ}\text{C}$.
Soldering time not over 3 seconds.