

HX7A8400-Q 3A High Accuracy Ultra-Low Noise (6.5 μ VRMS) LDO Voltage Regulator

Description

The HX7A8400-Q is an ultra-low-noise (6.5 μ VRMS), high power supply rejection ratio (PSRR), and highly accurate low-dropout (LDO) voltage regulator, capable of sourcing up to 3A with a dropout voltage of just 85mV. The output voltage can be configured from 0.8V to 3.95V via pin programming or adjusted from 0.8V to 5.0V using an external resistor divider, supporting a wide input range of 1.1V to 6.5V.

Its combination of low noise, high PSRR, and substantial output current makes the HX7A8400-Q ideal for powering noise-sensitive components in applications like high-speed communications, video processing, medical devices, and test equipment. The device effectively minimizes phase noise and clock jitter from the power supply, making it suitable for high-performance serializers/deserializers (SerDes), analog-to-digital converters (ADCs), digital-to-analog converters (DACs), and RF components.

For digital loads such as ASICs, FPGAs, and DSPs that require low-input voltage operation with minimal output ripple (LILO), the device's accuracy, excellent transient response performance, and soft-start capabilities ensure optimal system functionality.

Features


- ★ Low Dropout Voltage: 85mV (TYP) at 3A Load
- ★ 1% Accuracy Over Line, Load and Temperature
- ★ Ultra-Low Output Noise: 6.5 μ VRMS (TYP)
Output Voltage Noise Independent of Voltage
- ★ Input Voltage Range:
 - With BIAS: 1.1V to 6.5V
 - Without BIAS: 1.4V to 6.5V
- ★ Output Voltage Range:
 - Adjustable Operation: 0.8V to 5.0V
 - Pin-Programmable Operation: 0.8V to 3.95V
- ★ High PSRR: Over 70dB at 1kHz and 40dB at 1MHz


- ★ Excellent Load and Line Transient Responses
- ★ Available packages: 3.5mmx3.5mm 20-PIN QFN
- ★ Thermal Shutdown and Over-Current Protection
- ★ Stable with a 22 μ F or larger ceramic capacitor
- ★ Operating Junction Temperature: -40 $^{\circ}$ C to +125 $^{\circ}$ C
- ★ Open-Drain Power-Good (PG) Output

Applications

- ★ Wireless Equipment
- ★ High Performance Analog: VCO, ADC, DAC, LVDS
- ★ Communication: CPU, ASIC, FPGA, CPLD, DSP
- ★ Noise Sensitive Imaging: CMOC Sensors, Video ASICs
- ★ Instrumentation, Medical, and Audio

Typical Application Circuit

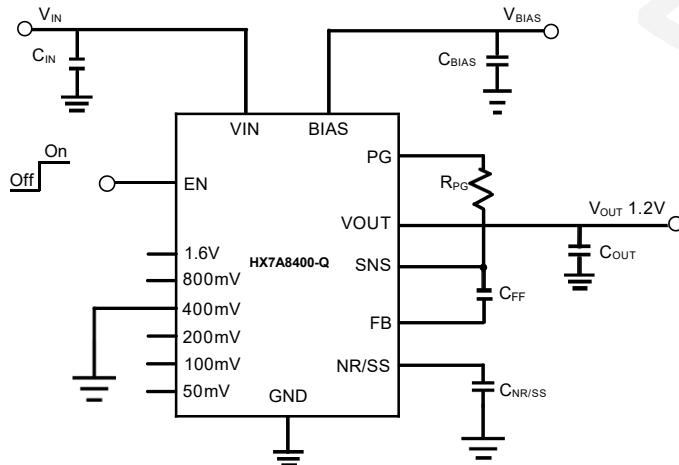

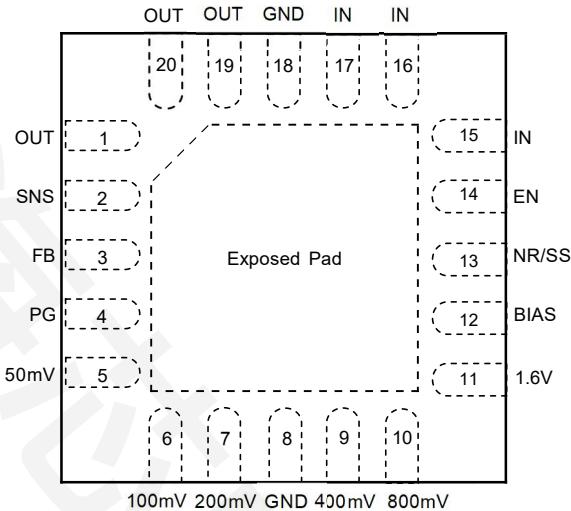

3.5mm x 3.5mm, 20-Pin QFN, Top View

Pin Descriptions

PIN Number	PIN Name	I/O	Function
1, 19, 20	OUT	O	Regulator output voltage pin. A 22 μ F or larger ceramic capacitor from OUT to ground is required to ensure regulator stability. The capacitor should be placed as close to the output as possible. Minimize the impedance from the OUT pin to the load.
2	SNS	I	Output voltage sense input pin. Connect this pin to the load side of the output trace or leave floating. If the ANY-OUT feature is not used, leave this pin floating.
3	FB	I	Feedback pin connected to the error amplifier. Although not required, a 10nF feed-forward capacitor from FB to OUT is recommended to maximize the regulator ac performance.
4	PG	O	Active-high, power-good pin. An open-drain output indicates when the output voltage reaches 88% of the target. A 10k Ω to 100k Ω external pullup resistor is required. This pin can be left floating or connected to GND if not used.
5	50mV	I	Pin-Programmable voltage setting pins. Connect these pins to ground, SNS, or leave floating. Connecting these pins to ground increases the output voltage, whereas connecting these pins to SNS increases the resolution of the pin-programmable network but decreases the range of the network; multiple pins can be simultaneously connected to ground or SNS to select the desired output voltage. Leave these pins floating (open) when not in use.
6	100mV		
7	200mV		
9	400mV		

10	800mV		
11	1.6V		
12	BIAS	I	BIAS supply voltage. This pin enables the use of low-input voltage, low-output voltage conditions (that is, $V_{IN} = 1.2V$, $V_{OUT} = 1V$) to reduce the power dissipation in the die. The use of a BIAS voltage improves dc and ac performance for $V_{IN} < 2.2V$. A 10uF capacitor or larger must be connected between this pin and ground. If not used, this pin must be left floating or tied to ground.
8, 18	GND	-	Ground pin.
13	NR/SS	O	Noise reduction pin. A 100nF or larger capacitor from NR to GND is recommended to maximize the performance.
14	EN	I	Enable pin. Drive EN high to turn on the LDO and drive the EN low to turn off the LDO. The EN pin can be connected to IN for automatic startup
15 - 17	IN	I	Input supply voltage pin. A 47μF or larger ceramic capacitor from IN to GND is recommended
-	Exposed Pad	-	Exposed Pad must be connected to a large-area ground plane to get maximum electrical and thermal performance .

Electrical Specifications

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
IN, BIAS, PG and EN Pins	IN, BIAS, PG, EN	-0.3 to 7	V
SNS and OUT Pin	SNS, OUT	-0.3 to $V_{IN} + 0.3$	V
NR/SS and FB Pins	NR/SS, FB	-0.3 to $V_{OUT} + 0.3$	V
50mV, 100mV, 200mV, 400mV, 899mV, 1.6V		-0.3 to $V_{OUT} + 0.3$	V
Storage temperature range	T_{STG}	-65 to +150	oC
Output current	I_{OUT}	3	A

Notes:

1. Exposure of the device under conditions beyond the limits specified by Maximum Ratings for extended periods may cause permanent damage to the device and affect product reliability. These conditions represent a stress rating only, and functional operations of the device at these or any other conditions above the operational limits noted in this specification is not implied.

ESD Ratings

		Value	Unit
V_{ESD}	Electrostatic Discharge	2000	V
		750	

Recommended Operation Conditions

Over operating temperature range unless otherwise noted

Parameter	Symbol	Min	Max	Unit
Input Supply Voltage	V_{IN}	1.1	6.5	V
BIAS Supply Voltage	V_{BIAS}	3.0	6.5	V
Output Voltage	V_{OUT}	0.8	5.0	V
Output Capacitance	C_{OUT}	22		μF
Output Current	I_{OUT}	0	3	A
Operating Junction Temperature	T_J	-40	125	oC

Thermal Information

Package	$R_{\theta JA}$	$R_{\theta JC(Bottom)}$	Unit
3.5x3.5mm 20-PIN QFN	49	7.5	oC/W


Electrical Characteristics $V_{IN} = 1.4V$ or $V_{IN} = V_{OUT} + 0.4V$ (whichever is greater), $V_{BIAS} = \text{open}$, $V_{OUT} = 0.8V$, $V_{EN} = 5V$, $C_{IN} = 10\mu F$, $C_{OUT} = 47\mu F$, $C_{NR/SS} = 1\mu F$, $C_{FF} = \text{open}$, PG pin pulled up to V_{IN} with 100 k Ω resistor, $T_A = -40$ to $+125^\circ C$ unless otherwise noted

Parameter	Symbol	Conditions	Rating			Unit
			Min	Typ	Max	
Input Voltage	V_{IN}	With V_{BIAS}	1.1	-	6.5	V
		Without V_{BIAS}	1.4	-	6.5	V
Bias Supply Voltage	V_{BIAS}	$V_{IN} = 1.1V$	3.0	-	6.5	V
Reference Voltage	V_{REF}			0.8		V
Input Supply UVLO with BIAS	$V_{UVLO1(IN)}$	V_{IN} rising with $V_{BIAS} = 3.0V$		1.0		V
$V_{UVLO1(IN)}$ Hysteresis	$V_{HYS1(IN)}$	$V_{BIAS} = 3.0V$		110		mV
Input Supply UVLO without BIAS	$V_{UVLO1(IN)}$	V_{IN} rising		1.32		V
$V_{UVLO2(IN)}$ Hysteresis	$V_{HYS2(IN)}$			110		mV
BIAS Supply UVLO	$V_{UVLO(BIAS)}$	V_{BIAS} rising, $V_{IN} = 1.1V$		2.8		V
$V_{UVLO(BIAS)}$ Hysteresis	$V_{HYS(BIAS)}$	$V_{IN} = 1.1V$		110		mV
Output Voltage Accuracy		$5mA \leq I_{OUT} \leq 3A$	-1.0	0	1.0	%
GND Pin Current	I_{GND}	$V_{IN} = 1.4V$, $V_{OUT} = 0.8V$, $I_{OUT} = 5mA$		0.95		mA
		$V_{IN} = 6.5V$, $V_{OUT} = 0.8V$, $I_{OUT} = 5mA$		1.05		mA
Shutdown Current	I_{SHDN}	$V_{IN} = 6.5V$, $V_{EN} = 0V$			25	μA
BIAS Pin Current	I_{BIAS}	$V_{IN} = 1.1V$, $V_{BIAS} = 6.5V$, $V_{OUT} = 0.8V$, $I_{OUT} = 3A$, PG Floating		1.1		mA
Dropout Voltage	V_{DO}	$V_{IN} = 1.4V$, $I_{OUT} = 3A$, $V_{FB} = 0.8 - 3\%$		98		mV
		$V_{IN} = 5.4V$, $I_{OUT} = 3A$, $V_{FB} = 0.8 - 3\%$		105		mV
		$V_{IN} = 1.1V$, $V_{BIAS} = 5.0V$, $I_{OUT} = 3A$, $V_{FB} = 0.8 - 3\%$		85		mV
Output Current Limit	I_{IM}	V_{OUT} forced at $0.9 \times V_{OUT(NOM)}$, $V_{IN} = V_{OUT(NOM)} + 0.4V$		4.8		A
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	$V_{IN} = 1.4 - 6.5V$, $I_{OUT} = 5mA$		0.003		mV/V
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	$V_{IN} = 1.1V$, $V_{BIAS} = 3 - 6.5V$, $I_{OUT} = 5mA$ to $3A$		0.3		mV/A
EN pin low-level input voltage (device disabled)	$V_{IL(EN)}$		0		0.5	V

EN pin high-level input voltage (device enabled)	$V_{IH(EN)}$		1.1		6.5	V
EN PIN Leakage Current	I_{EN}	$V_{IN} = 6.5V, 0V \leq V_{EN} \leq 6.5V$	-0.2		0.2	μA
FB PIN Leakage Current	I_{FB}	$V_{IN} = 6.5V, V_{FB} = 0.8V$	-0.2		0.2	μA
PG Pin Threshold	V_{PG}	V_{OUT} Falling, PG Transitioning Low Expressed as a Percentage of $V_{OUT(TARGET)}$		88%		
PG Pin Hysteresis	$V_{HYS(PG)}$	V_{OUT} Rising, PG Transitioning High Expressed as a Percentage of $V_{OUT(TARGET)}$		1.2%		
PG Pin Low Level Output Voltage	$V_{OL(PG)}$	$V_{OUT} < V_{PG}$, Source 1mA to PG Pin			0.4	V
PG Pin Leakage Current	I_{PG}	$V_{OUT} > V_{PG}$, Apply 6.5V to PG Pin			1	μA
Power Supply Ripple Rejection	PSRR	$V_{IN} - V_{OUT} = 0.4V$, $I_{OUT} = 3A$, $C_{OUT} = 47\mu F \parallel 10\mu F \parallel 10\mu F$, $C_{NR} = 1\mu F$, $C_{FF} = 10nF$	$f = 10kHz$, $V_{OUT} = 0.8V$, $V_{BIAS} = 5.0V$	48		dB
			$f = 500kHz$, $V_{OUT} = 0.8V$, $V_{BIAS} = 5.0V$	38		
			$f = 10kHz$, $V_{OUT} = 5.0V$	41		
			$f = 500kHz$, $V_{OUT} = 5.0V$	26		
Output Noise Voltage	V_N	$BW = 10Hz$ to $100kHz$, $V_{IN} = 5V$, $V_{OUT} = 3.3V$, $I_{OUT} = 3A$, $C_{OUT} = 47\mu F \parallel 10\mu F \parallel 10\mu F$, $C_{NR} = 1\mu F$, $C_{FF} = 10nF$		6.5		μV_{RMS}
Thermal Shutdown Temperature	TSD			160		oC
Thermal Shutdown Hysteresis	T_{HYS}			20		oC


Typical Characteristics

$V_{IN} = 1.4V$ or $V_{IN} = V_{OUT} + 0.4V$ (whichever is greater), $V_{BIAS} = \text{open}$, $V_{OUT} = 0.8V$, $V_{EN} = V_{IN}$, $C_{IN} = 10\mu F$, $C_{OUT} = 47\mu F$, $C_{NR} = 1\mu F$, $C_{FF} = \text{open}$, $T_A = -40$ to $+125^{\circ}\text{C}$ unless otherwise noted

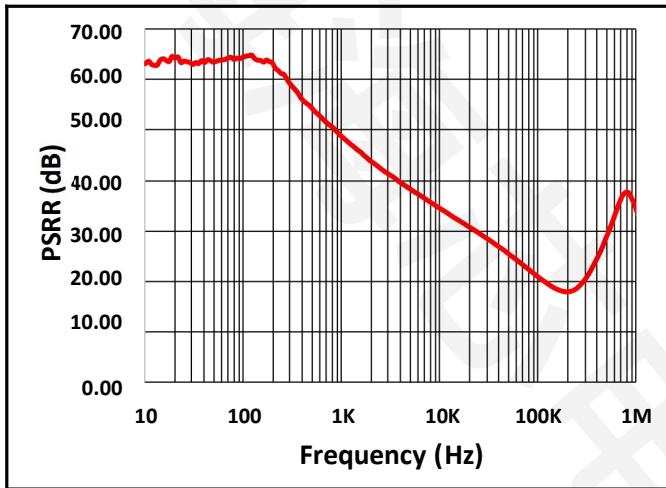


$V_{IN} = 4V$, $V_{BIAS} = \text{open}$, $V_{OUT} = 3.3V$, $I_{OUT} = 3A$, $C_{OUT} = 47\mu F \parallel 10\mu F \parallel 10\mu F$, $C_{NR} = 1\mu F$, $C_{FF} = \text{open}$

Fig. 1 PSRR

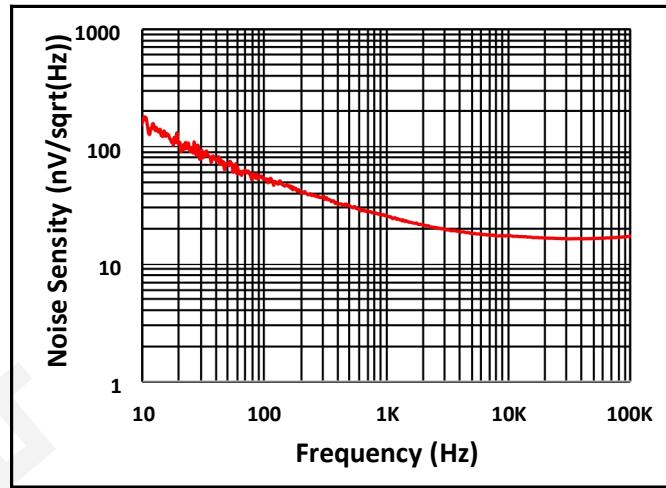


$V_{IN} = 4V$, $V_{BIAS} = \text{open}$, $V_{OUT} = 3.3V$, $I_{OUT} = 3A$, $C_{OUT} = 47\mu F \parallel 10\mu F \parallel 10\mu F$, $C_{NR} = 1\mu F$, $C_{FF} = \text{open}$

Fig. 2 Output Noise Density

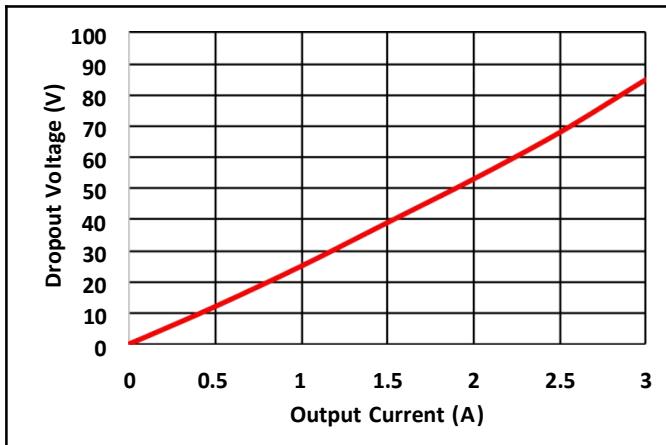

$V_{IN} = 1.1V$, $V_{BIAS} = 3.3V$

Fig. 3 Dropout Voltage with BIAS

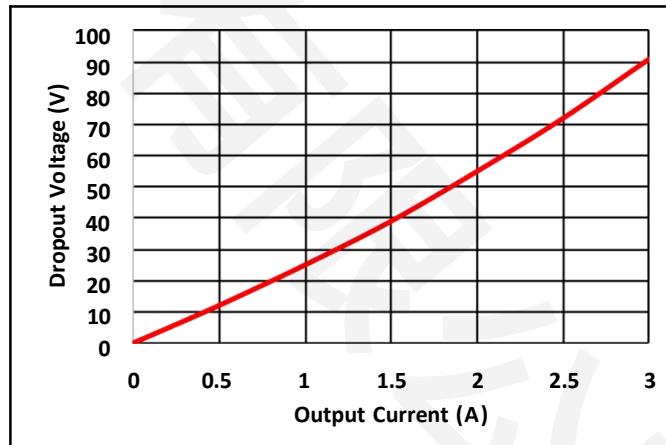

$V_{IN} = 1.4V$, $V_{BIAS} = 0V$

Fig. 4 Dropout Voltage without BIAS


 $V_{BIAS} = 0V, I_{OUT} = 5mA$

Fig. 5 Ground Current vs Input Voltage



 $V_{IN} = 1.1V, I_{OUT} = 5mA, PG Floating$

Fig. 6 BIAS Pin Current vs BIAS Voltage

Functional Block Diagram

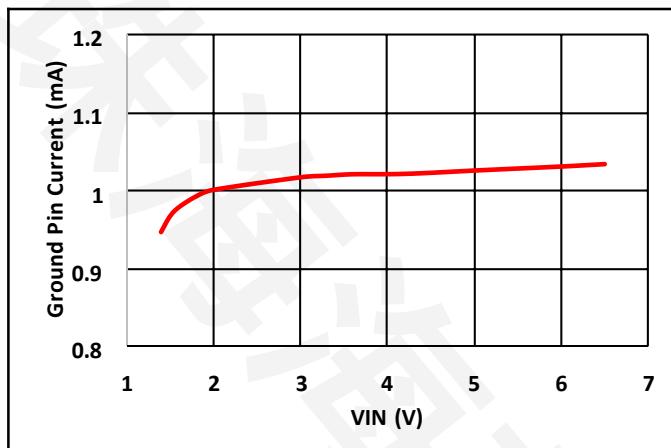

Feature Description

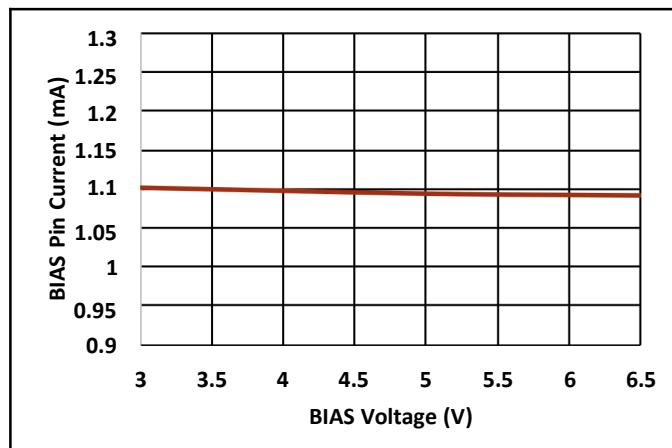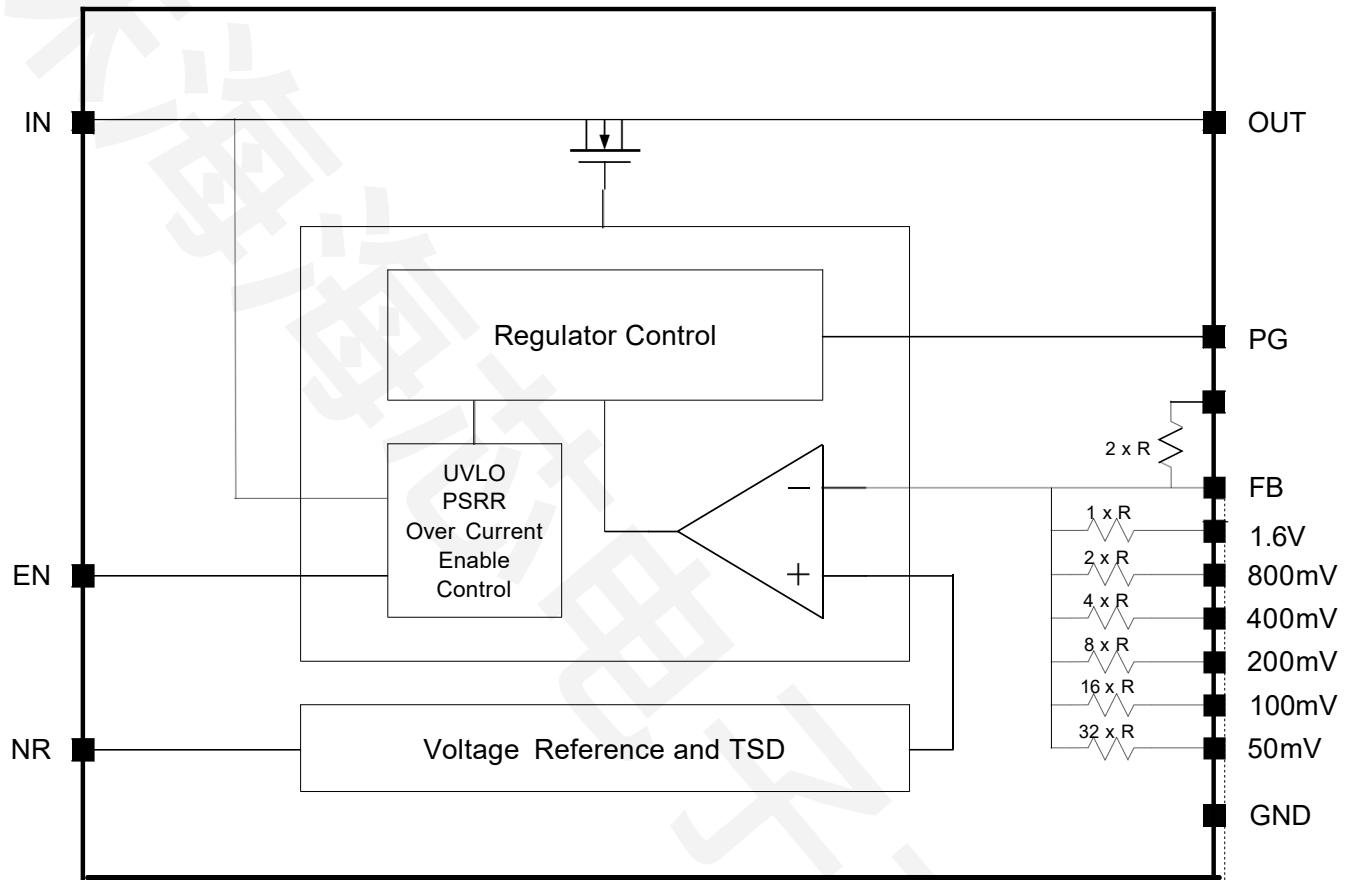Enable

The enable pin for HX7A8400-Q is active high. The device is enabled when the enable pin voltage is greater than $V_{IH(EN)}$ and disabled with the enable pin voltage less than $V_{IL(EN)}$. If independent control of chip enable is not needed, then connect the enable pin to the input. The HX7A8400-Q

has an internal pulldown MOSFET that connects a discharge resistor from VOUT to ground when the device is disabled to actively discharge the output voltage.

Integrated Resistance Network (Pin-Programmable Output)

An internal feedback resistance network is provided, allowing the HX7A8400-Q output voltage to be programmed easily between 0.8V to 3.95V with a 50mV step by tying the programmable

pins to ground. Tying the programmable pins to SNS increases the resolution but limits the range of the output voltage. Excellent accuracy across output voltage and temperature can be achieved using the integrated resistance network.

Bias Rail

The device features a bias rail to enable low-input voltage, low-output (LILO) voltage operation by providing power to the internal circuitry of the device. The bias rail is required for operation with $V_{IN} < 1.4V$.

Power-Good Function

The power-good circuit monitors the voltage at the feedback pin to indicate the status of the output voltage. When the feedback pin voltage falls below the PG threshold voltage, the PG pin open-drain output engages and pulls the PG pin close to ground. When the feedback voltage

exceeds the threshold by an amount greater than $V_{HYS(PG)}$, the PG pin becomes high impedance. By connecting a pullup resistor to an external supply, and downstream device can receive power-good as a logic signal that can be used for sequencing. Make sure that the external pullup supply voltage results in a valid logic signal for the receiving device or devices. Using a pullup resistor from $10k\Omega$ to $100k\Omega$ is recommended.

Internal Current Limit

The internal current limit circuit is used to protect the LDO against high-load current faults or

shorting events. During a current-limit event, the LDO sources constant current; therefore, the output voltage falls with decreased load impedance. Thermal shutdown can activate during a

current limit event because of the high power dissipation typically found in these conditions. To ensure proper operation of the current limit, minimize the inductances to the input and load.

Continuous operation in current limit is not recommended.

Undervoltage Lockout (UVLO)


HX7A8400-Q uses an undervoltage lockout circuit to keep the output shut off until the internal circuitry is operating properly.

Thermal Protection


HX7A8400-Q contains a thermal shutdown protection circuit to turn off the output current when excessive heat is dissipated in the LDO.

Application Information

Typical Application for Pin-Programmable Output Voltage

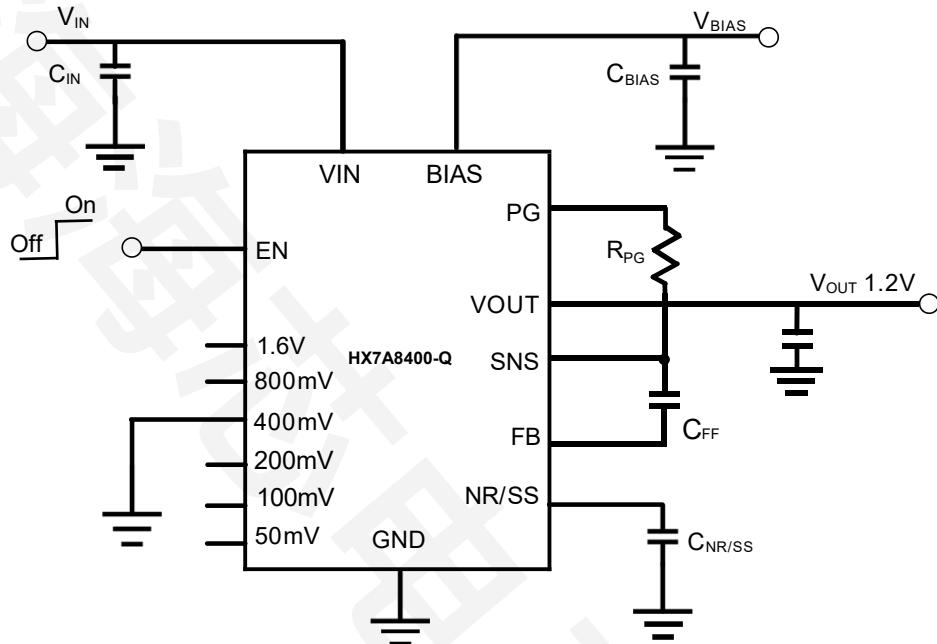

Typical Application for Adjustable Output Voltage

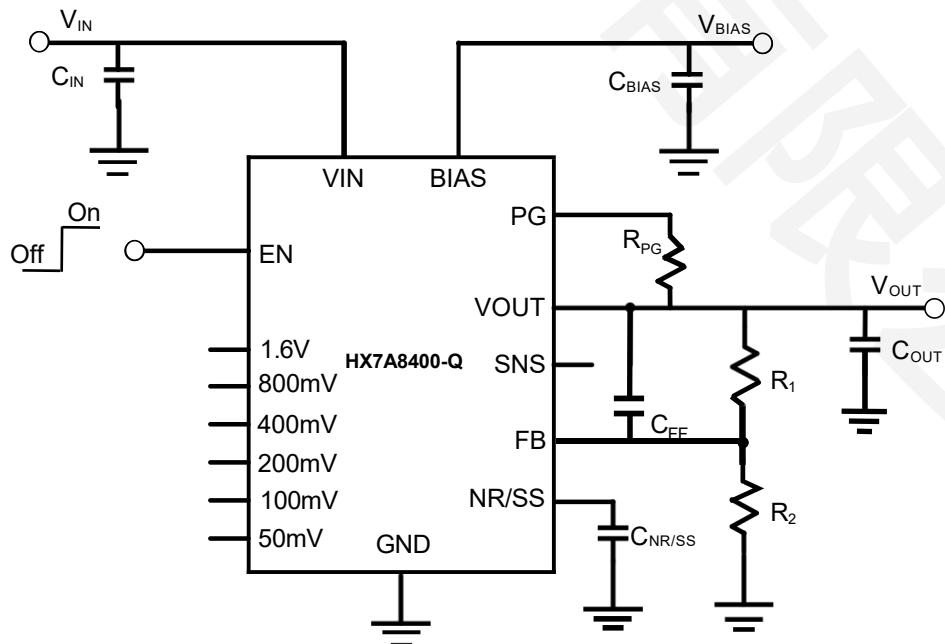

Input Capacitor and Output Capacitor

The HX7A8400-Q is designed and characterized for operation with ceramic capacitors of 10 μ F or greater at the input and 22 μ F or greater at the output. Locate the input and output capacitors as near as practical to the input and output pins to minimize the trace inductance from the capacitor to the device.

Feed-Forward Capacitor (C_{FF})

Although a feed-forward capacitor (C_{FF}), from the FB pin to the OUT pin is not required to achieve stability, a 10nF, feed-forward capacitor improves noise and PSRR performance.

Pin-Programmable Output Voltage

The output voltage of the HX7A8400-Q can be set by the internally-matched pin-programmable

feedback resistor network. Each of the programmable pins from 5 to 11 can be connected to ground (active) or left open (floating), or connected to SNS. The output is set as the internal reference voltage by Equation 1 plus the accumulated sum of the respective voltages assigned to each active pin.

$$V_{OUT} = 0.8V + (\Sigma \text{ programmable pins to Ground}) \quad (1)$$

Table 1. Pin-Programmable Output Voltage

PROGRAMMABLE PINS (Active Low)	ADDITIVE OUTPUT VOLTAGE LEVEL
Pin 5 (50mV)	50mV
Pin 6 (100mV)	100mV
Pin 7 (200mV)	200mV
Pin 9 (400mV)	400mV
Pin 10 (800mV)	800mV
Pin 11 (1.6V)	1.6V

The voltage setting pins have a binary weight; therefore the output voltage can be programmed to any value from 0.8V to 3.95V in 50mV steps when tying these pins to ground. As with the

adjustable operation, the output voltage is set according to Equation 2 except that R1 and R2 are internally integrated and matched for higher accuracy. Tying any of the programmable pins to SNS can increase the resolution of the internal feedback network by lowering the value of

R1.

Adjustable Output Voltage

The output voltage of HX7A8400-Q can be adjusted from 0.8V to 5.0V according to the following equation.

$$V_{OUT} = 0.8V \times \left(1 + \frac{R1}{R2}\right) \quad (2)$$


The table below lists the resistor combination required to achieve a few of the most common rails using commercially available, 0.1%-tolerance resistors.

Table 2. Adjustable Output Voltage

VOUT(TARGET) (V)	FEEDBACK RESISTOR VALUES		CALCULATED OUTPUT VOLTAGE (V)
	R1 (kΩ)	R2 (kΩ)	
0.8	Short	Open	0.800
1.00	12.4	49.9	0.999
1.20	12.4	24.9	1.198
1.50	12.4	14.3	1.494
1.80	12.4	10	1.798
2.50	12.4	5.9	2.48
3.00	12.1	4.42	2.990
3.30	11.8	3.74	3.324
5.00	12.4	2.37	4.985

PACKAGE OUTLINE DIMENSIONS

3.5mm x 3.5mm 20-PIN QFN

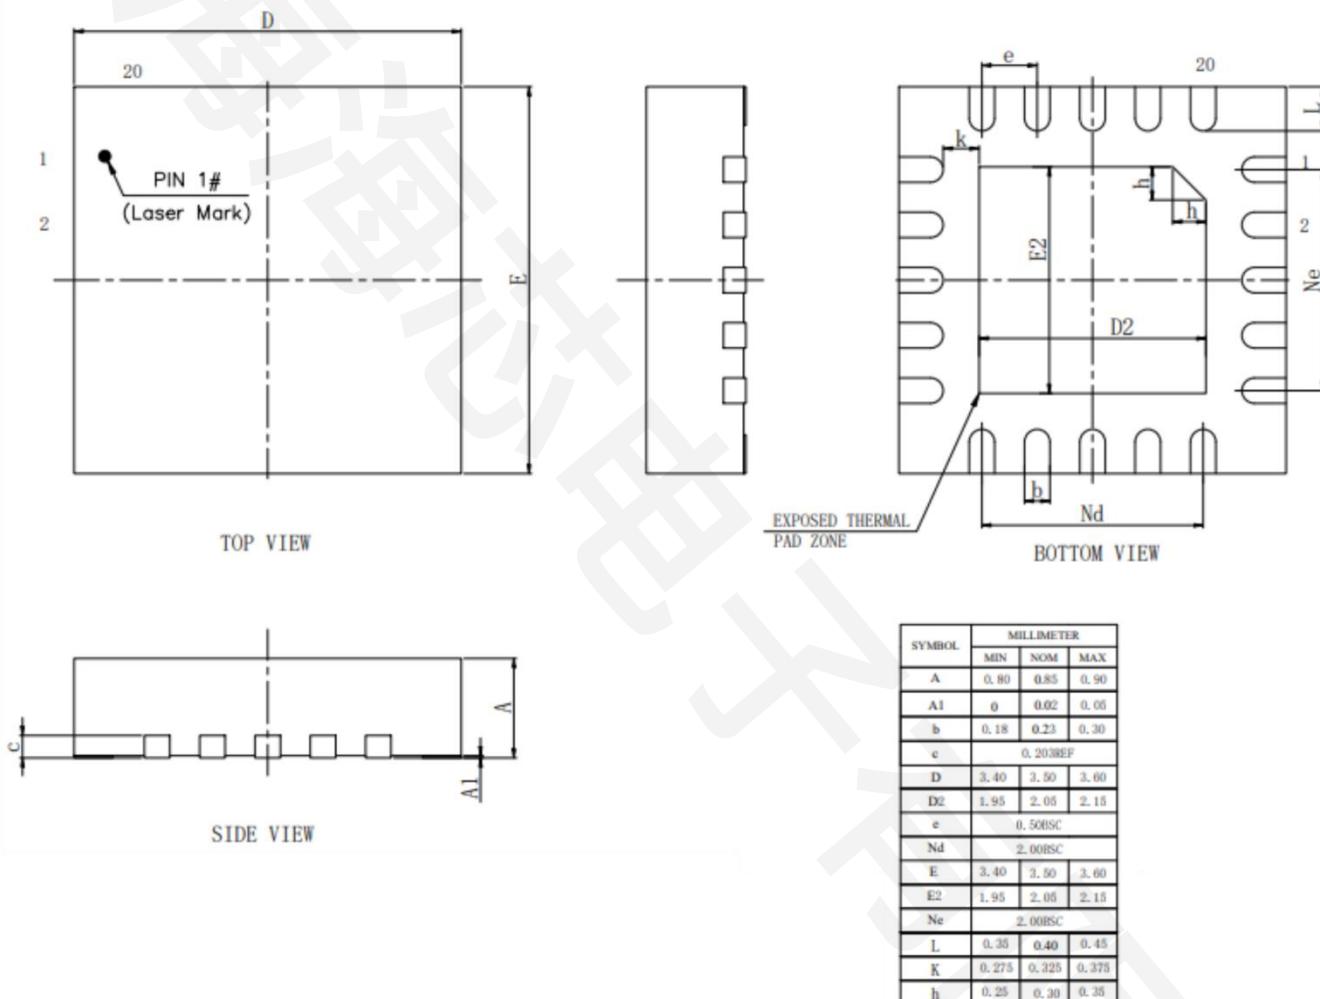

Package/Ordering Information

DEVICE	PACKAGE DESCRIPTION	PACKING OPTION
HX7A8400-Q	3.5mm x 3.5mm, 20-PIN QFN	Tape and Reel, 3000