



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 2192.5 MHz SMD 3.0X3.0 mm (BW=15MHz)

TST Part No.: TA1192A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Francis Chen 

Date: _____ 4, 23, 2010

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 2192.5 MHz

MODEL NO.:TA1192A

REV. NO.:1

A. MAXIMUM RATING:


1. Input Power Level: 15 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +105°C

RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	2192.5	-	-
Insertion Loss (2185~2200 MHz) IL	dB	-	3.2	5	-
Amplitude Ripple (2185~2200 MHz)	dB	-	1.1	2	-
VSWR (2185~2200 MHz)		-	1.4	2	-
Attenuation (Reference level from 0 dB)					
824 ~ 849 MHz	dB	35	42	-	-
880 ~ 960 MHz	dB	35	41	-	-
1710 ~ 1785 MHz	dB	40	45	-	-
1805 ~ 1920 MHz	dB	40	47	-	-
1920 ~ 2010 MHz	dB	40	53	-	-
2110 ~ 2140 MHz	dB	18	28	-	-
2300 ~ 2400 MHz	dB	15	54	-	-
2400 ~ 2500 MHz	dB	20	55	-	-
Temperature Coefficient of Frequency	ppm/°C	-	-36	-	-


C.OUTLINE DRAWING:

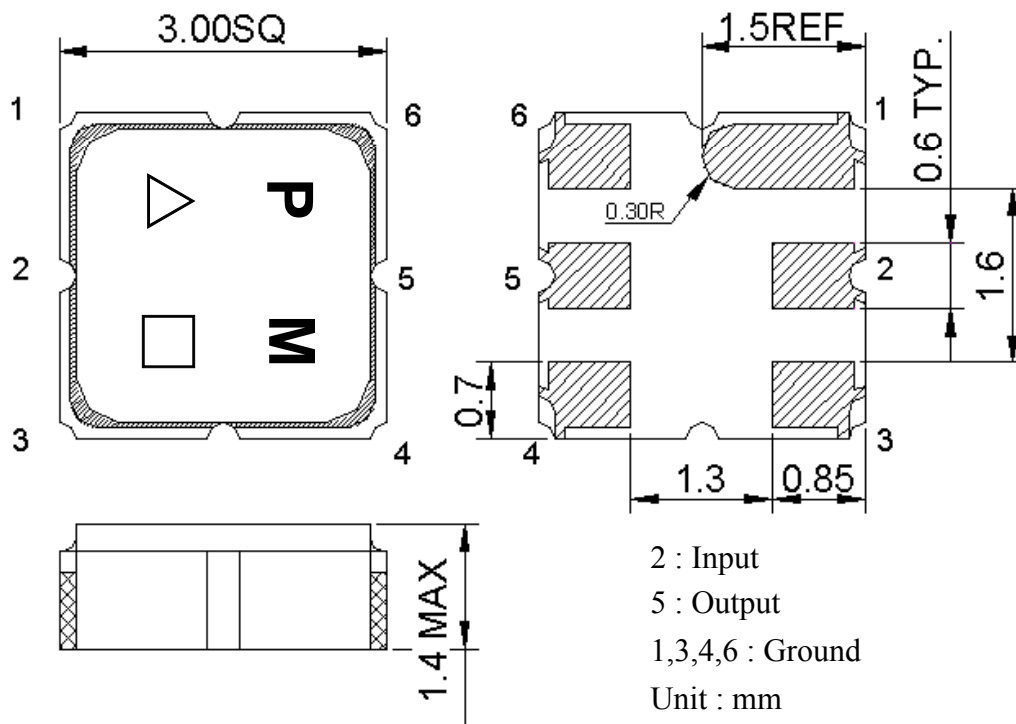


△ : Year Code (2009->9, 2010->0,..., 2018->8)

□ : Date Code (W01->A,W02->B,...W27->a,...,W52->z)




D. MEASUREMENT CIRCUIT:

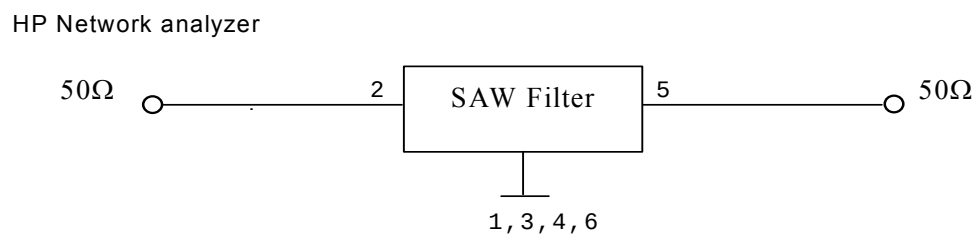

E. PCB Footprint:

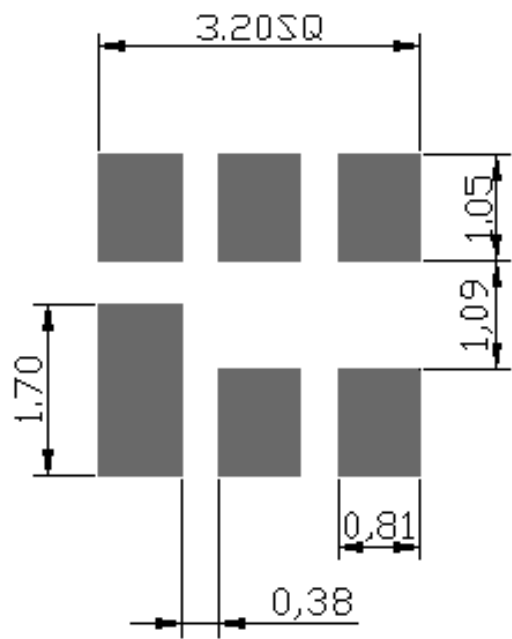


F. Frequency Characteristics :

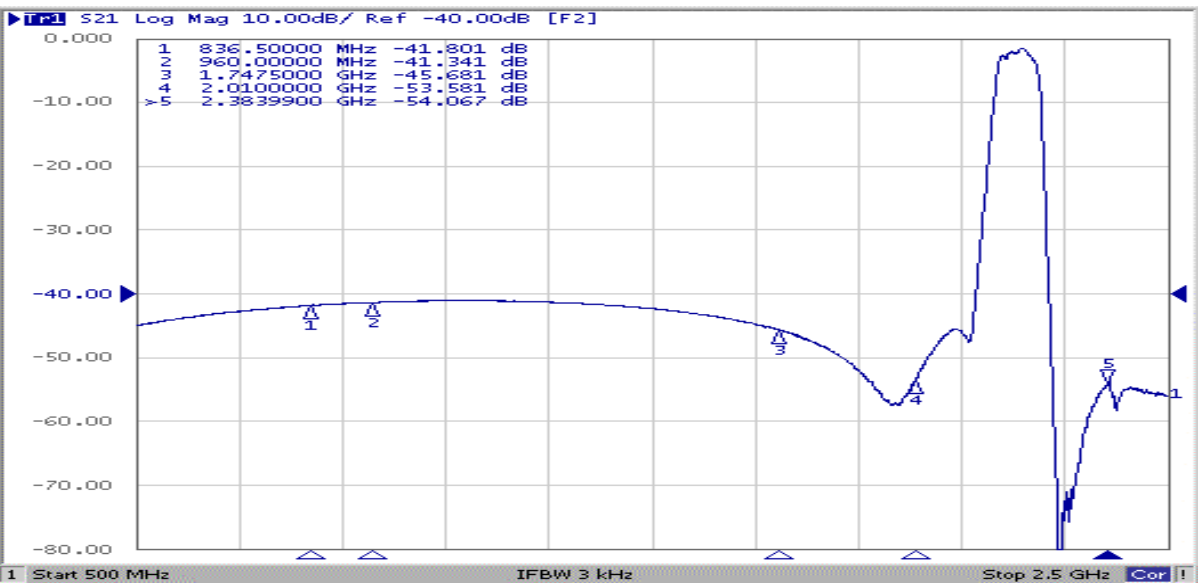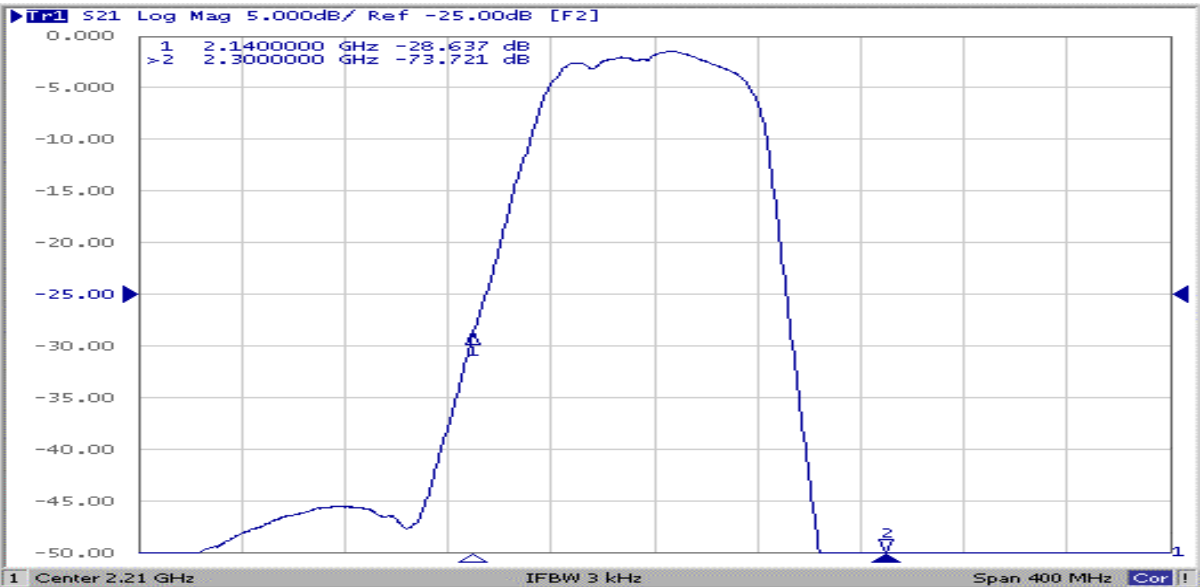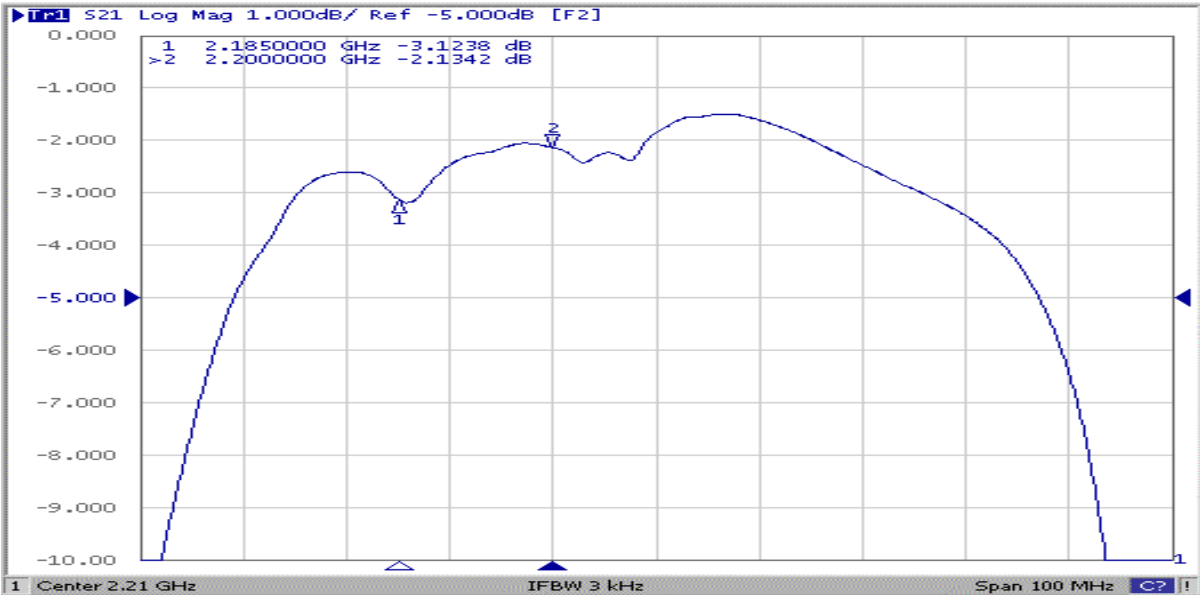


Reflection Functions :

S11

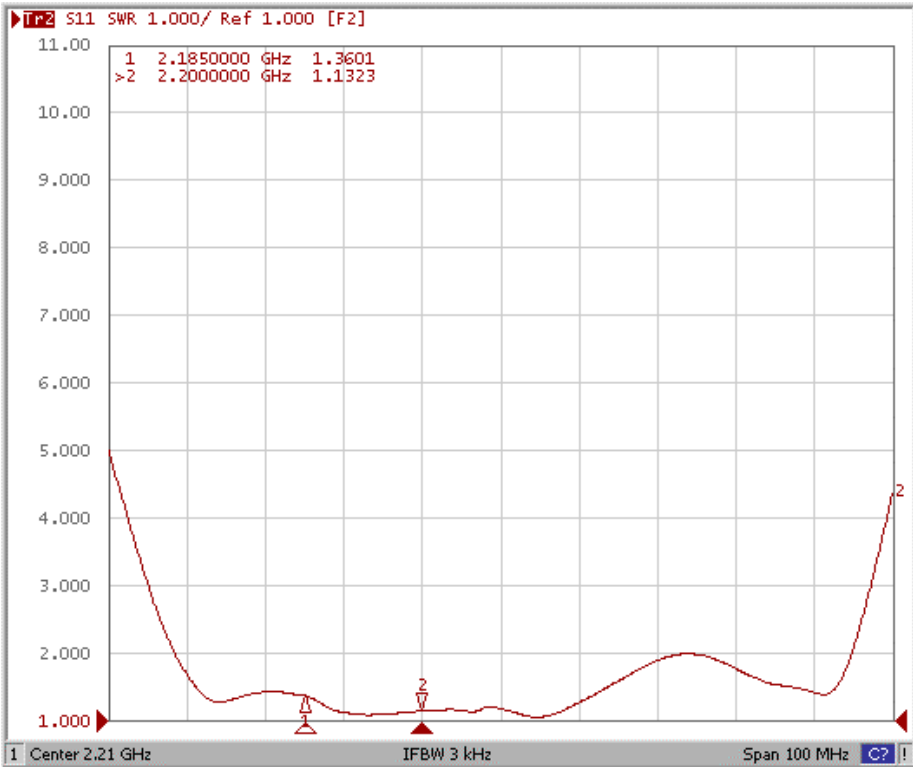


S22

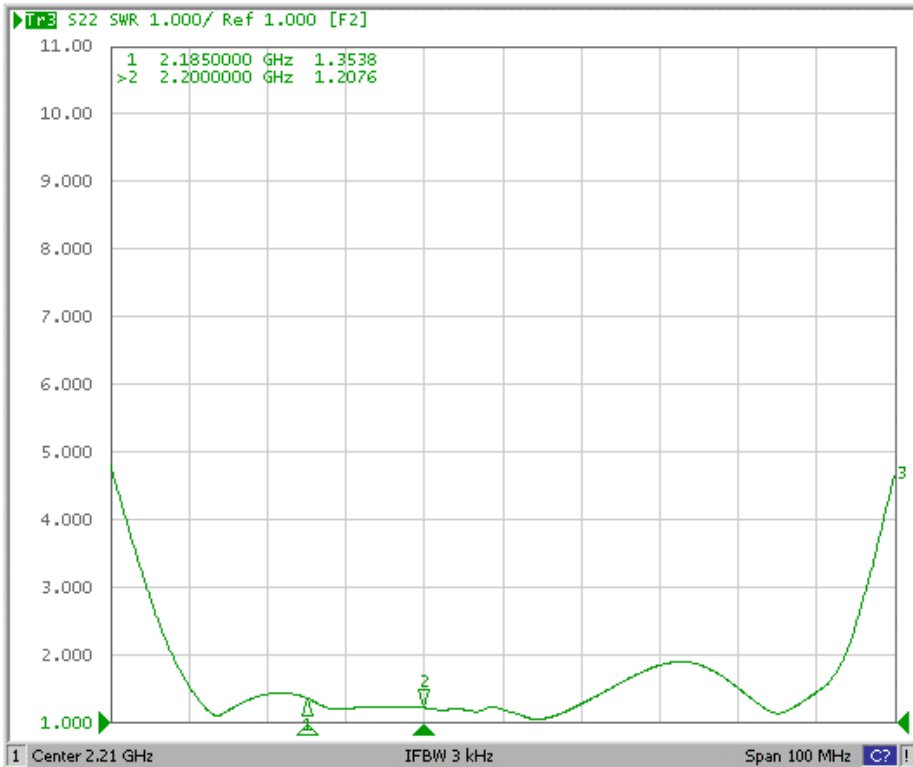


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7''=1000 ; 13''=3000)

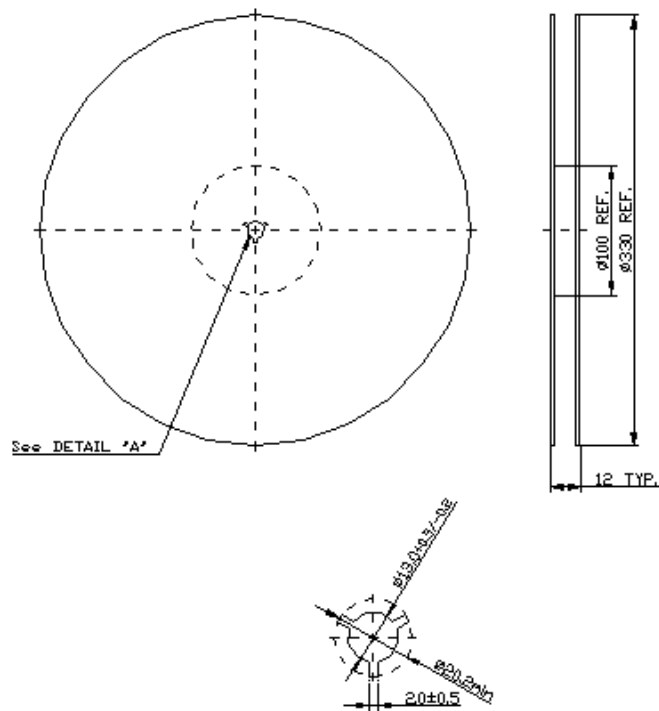

2. TAPE DIMENSION

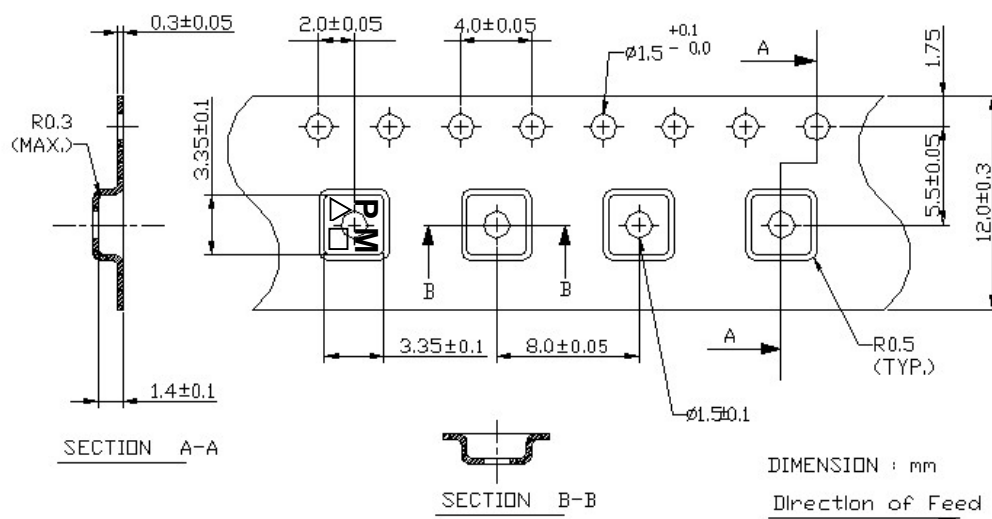

H. RECOMMENDED REFLOW PROFILE :

