

Technical drawing of a mechanical assembly showing two views: a top view and a side view.

Top View Dimensions:

- Total width: 2.9
- Slot width: 2
- Total height: 5
- Slot height: 2.7

Side View Dimensions:


- Total height: 5.8
- Slot width: 4.5
- Thickness: 0.3 THK
- Slot height: 3.5

Callouts:

- 1: Points to the right side of the slot in the side view.
- 4: Points to the left side of the slot in the side view.

Travel Dimensions:

- LOCK TRAVEL 1.1
- TOTAL TRAVEL 1.9

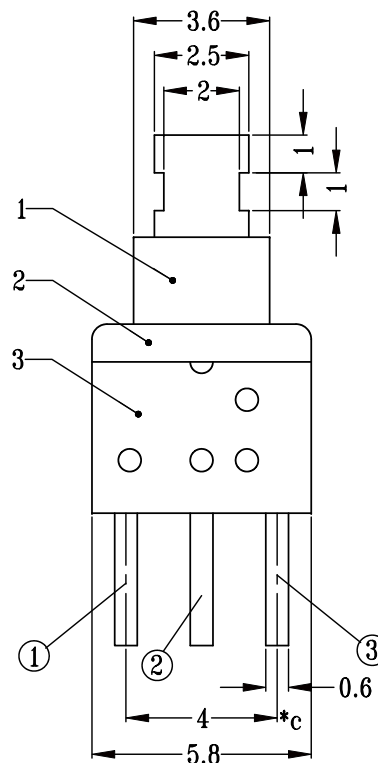

A diagram of a 2D hexagonal lattice. The lattice is composed of solid lines forming a triangular pattern. A dashed horizontal line passes through the center of the lattice. Dimensions are indicated: a horizontal distance of 4 units between the first and third vertical lines, and a horizontal distance of 2 units between the first and second vertical lines. A vertical distance of 5 units is indicated between the top and bottom horizontal dashed lines.

P.C.B. LAYOUT
TOP VIEW

注：“*”表示关键尺寸（3个）。

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm	A	25-Oct-2009			
5	CAM STICK 钩仔	STEEL WIRE 不锈钢线	1	WASHING	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	SPRING 弹弓	STEEL WIRE 不锈钢线	1	TEMPER	TITLE : PUSH SWITCH			UNIT : mm	DRWG NO.: KH-PB-22E60	
3	CASE 胶座	NYLON+F.G/BRASS STRIP 尼龙纤维/青铜	1	GREY/Ag PLATED OVER Ni PLATED	MODEL: PB-22E60			SCALE: 5:1	DWN.	25-Oct-2009
2	COVER 胶盖	POM 赛钢	1	BLACK	深圳市金航标电子有限公司				CHK'D	
1	KNOB 胶头	POM/PBS C5210R-EH 赛钢/磷铜	1	WHITE/Ag CLAD						
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.	