



-60V/-10A P-Channel Advanced Power MOSFET


Features

- Improved dv/dt Capability, High Ruggedness.
- Maximum Junction Temperature Range (150°C)

BVDSS	-60	V
ID	-10	A
RDSON@VGS=-10V	19	mΩ
RDSON@VGS=-4.5V	24	mΩ

Applications

- PWM applications
- Load switch
- Power management

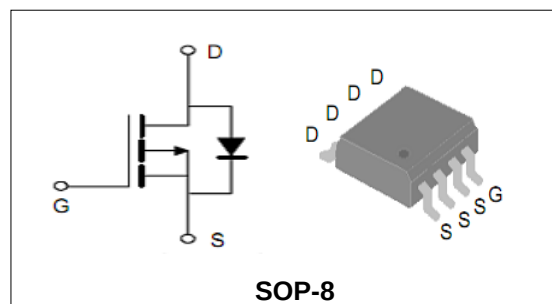

SOP-8

Order Information

Product	Package	Marking	Reel Size	Reel	Carton
PGS06P270	SOP-8	PGS06P270	13inch	3000PCS	48000PCS

Absolute Maximum Ratings

Symbol	Parameter		Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)				
V _{(BR)DSS}	Drain-Source Breakdown Voltage		-60	V
V _{GS}	Gate-Source Voltage		±20	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	°C
I _S	Diode Continuous Forward Current	TA =25°C	-10	A
Mounted on Large Heat Sink				
I _{DM}	Pulse Drain Current Tested (Silicon Limit) (Note1)	TA =25°C	-40	A
I _D	Continuous Drain current	TA =25°C	-10	A
P _D	Maximum Power Dissipation	TA =25°C	3.8	W
R _{θJA}	Thermal Resistance Junction-to-Ambient (Note2)		32.9	°C/W

**-60V/-10A P-Channel Advanced Power MOSFET**

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
V _{(BR)DSS}	Drain- Source Breakdown Voltage	VGS=0V ID=-250μA	-60	--	--	V
I _{DSS}	Zero Gate Voltage Drain current	VDS=-60V,VGS=0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	VGS=±20V,VDS=0V	--	--	±100	nA
V _{GS(TH)}	Gate Threshold Voltage	VDS=VGS,ID=-250μA	-1	--	-2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance (Note3)	VGS=-10V, ID=-10A	--	19	25	mΩ
		VGS=-4.5V, ID=-8A	--	24	36	mΩ
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated) (Note4)						
C _{iss}	Input Capacitance	VDS= -25V, VGS=0V, F=1MHz	--	1500	--	pF
C _{oss}	Output Capacitance		--	270	--	pF
C _{rss}	Reverse Transfer Capacitance		--	15	--	pF
Q _g	Total Gate Charge	VDS= -30V, ID= -3A, VGS= -10V	--	25	--	nC
Q _{gs}	Gate-Source Charge		--	4.3	--	nC
Q _{gd}	Gate-Drain Charge		--	3.1	--	nC
Switching Characteristics (Note4)						
t _{d(on)}	Turn-on Delay Time	VDS=-30V, IDS=-4A, RG=6Ω, VGS=-10V	--	7.2	--	nS
t _r	Turn-on Rise Time		--	5.5	--	nS
t _{d(off)}	Turn-off Delay Time		--	66	--	nS
t _f	Turn-off Fall Time		--	21	--	nS
Source- Drain Diode Characteristics@ TJ = 25°C (unless otherwise stated)						
V _{SD}	Forward on voltage	IS=-3A,VGS=0V	--	--	-1.3	V

Note:

- Limited by TJmax, starting TJ = 25° C, RG = 25Ω, VD = -20V, VGS = -10V. Part not recommended for use above this value.
- Repetitive Rating: Pulse width limited by maximum junction temperature.
- Surface Mounted on FR4 Board, t ≤ 10 sec.
- Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.



-60V/-10A P-Channel Advanced Power MOSFET

Typical Characteristics

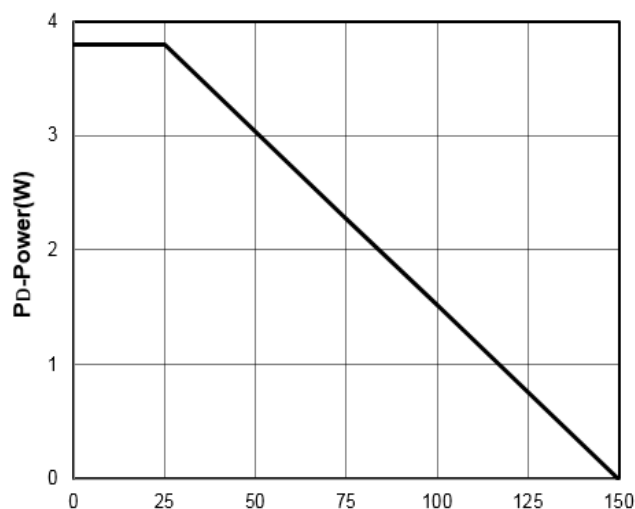


Figure1: T_J -Junction Temperature (°C)

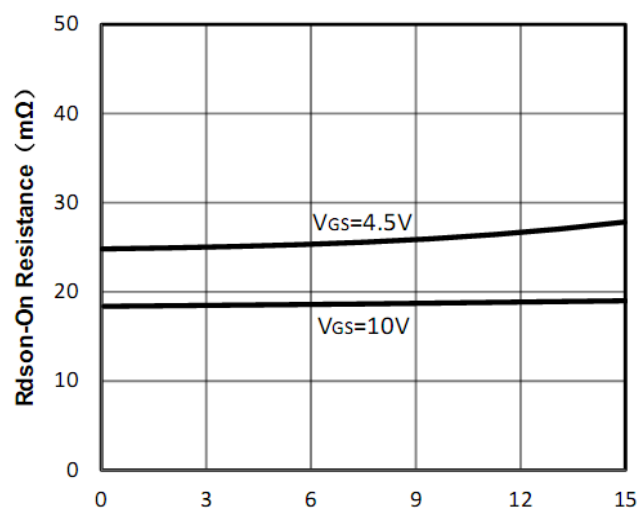


Figure2: -I_D -Drain Current (A)

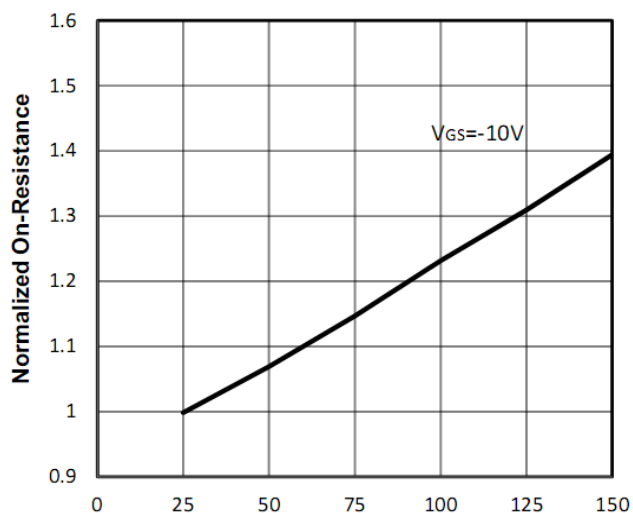


Figure3: T_J -Junction Temperature (°C)

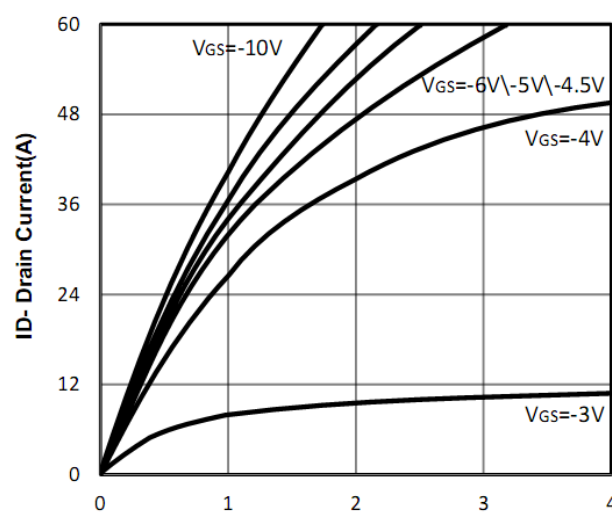


Figure4: -V_{DS} -Drain-Source Voltage (V)

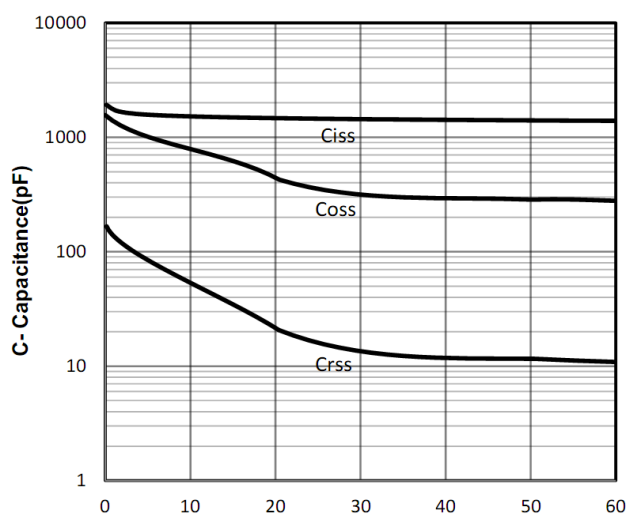


Figure5: -V_{DS} -Drain-Source Voltage (V)

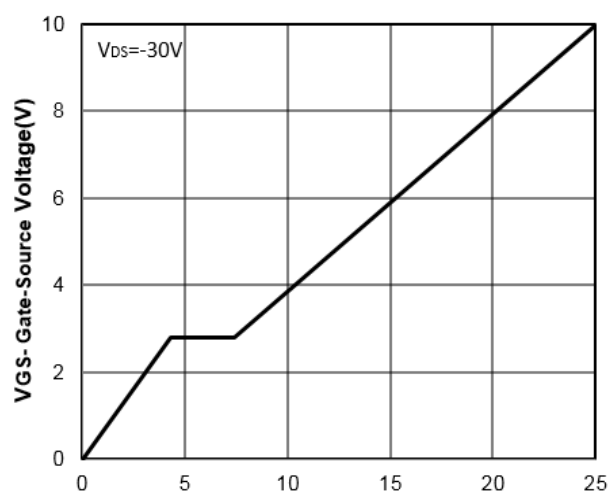


Figure6: Q_g -Gate Charge (nC)



-60V/-10A P-Channel Advanced Power MOSFET

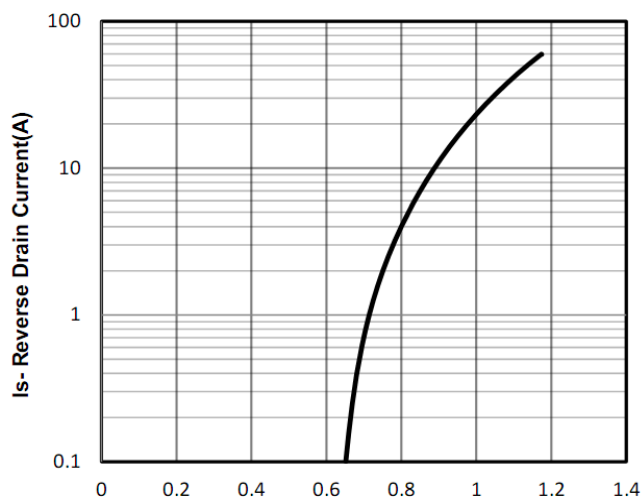


Figure7: -Vsd-Source-Drain Voltage (V)

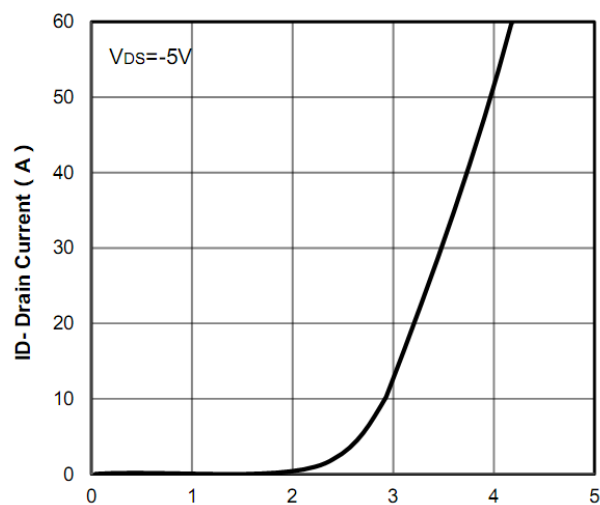


Figure8: -Vgs-Gate-Source Voltage (V)

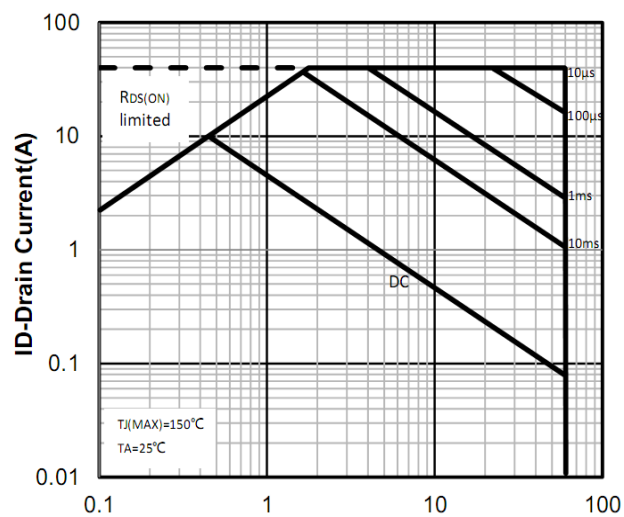


Figure9: -Vds-Drain-Source Voltage (V)

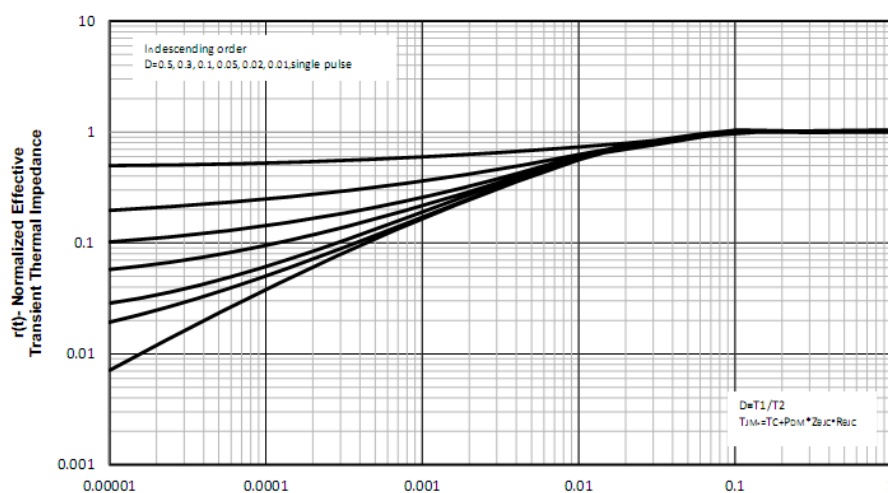


Figure10: Square Wave Pulse Duration (sec)



-60V/-10A P-Channel Advanced Power MOSFET

Test Circuit and Waveform:

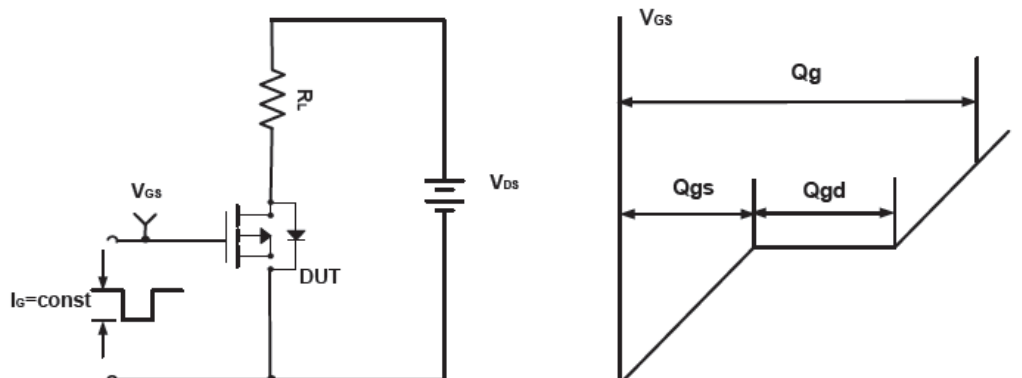


Figure A Gate Charge Test Circuit & Waveforms

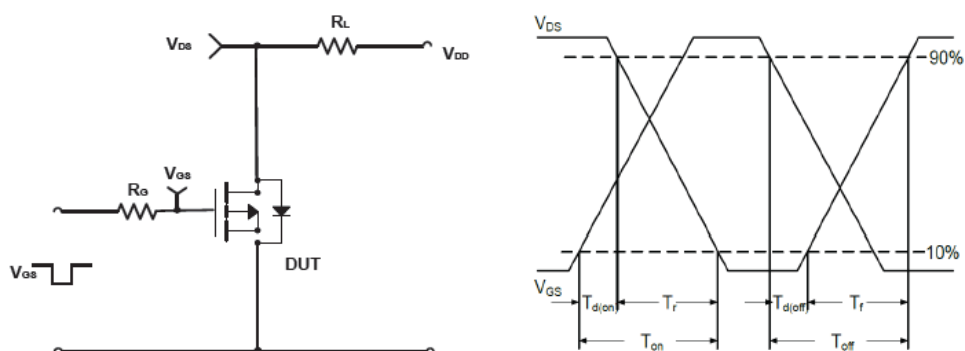
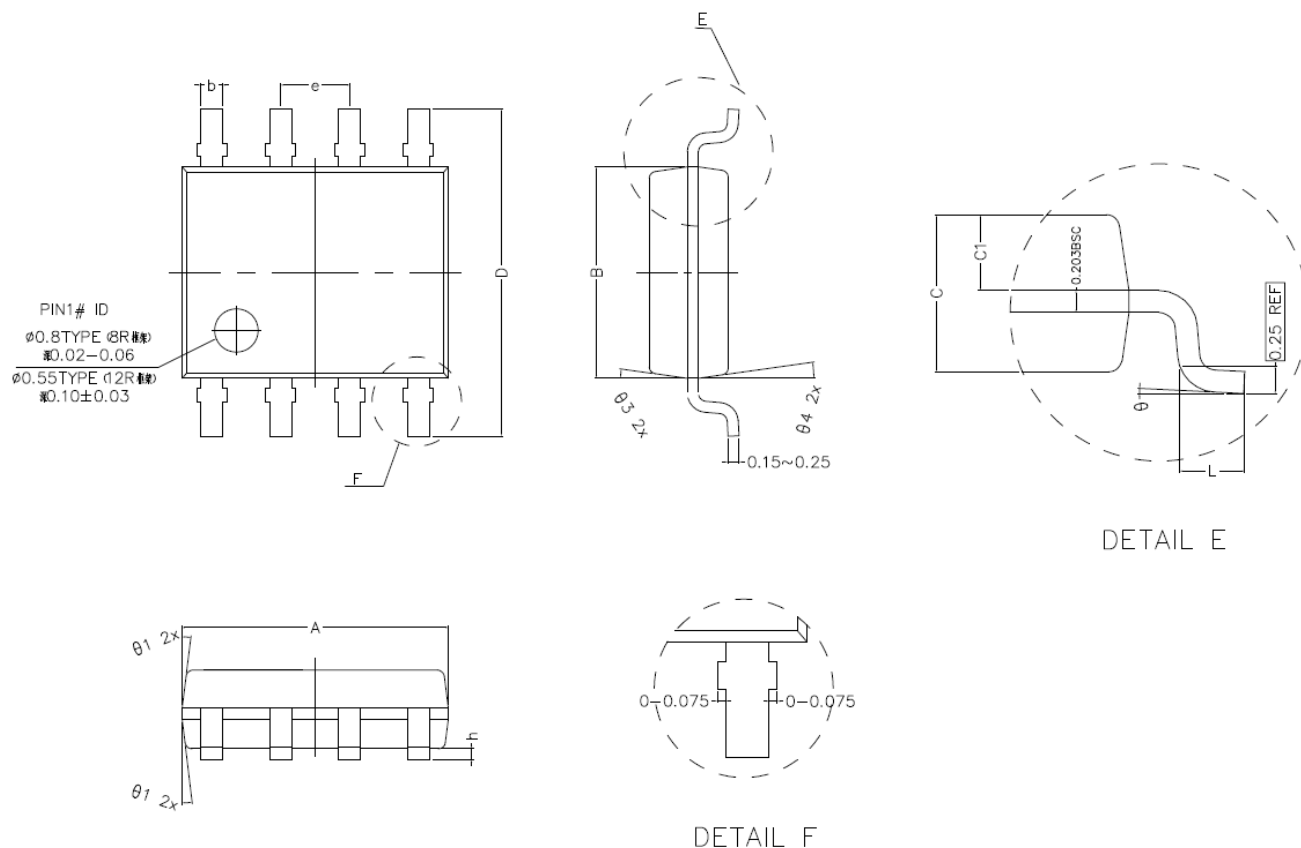


Figure B Switching Test Circuit & Waveforms

**-60V/-10A P-Channel Advanced Power MOSFET****SOP-8 Package Outline Dimensions (Units: mm)**

COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A	4.800	4.900	5.000
B	3.800	3.900	4.000
C	1.350	1.450	1.550
C1	0.650	0.700	0.750
D	5.900	6.100	6.300
L	0.500	0.600	0.700
b	0.350	0.400	0.450
h	0.050	0.150	0.250
e	1.270TYPE		
θ_1	7° TYPE(8R) 12° TYPE(12R)		
θ_2	7° TYPE(8R) 10° TYPE(12R)		
θ_3	8° TYPE(8R) 12° TYPE(12R)		
θ_4	8° TYPE(8R) 10° TYPE(12R)		
θ	0° ~ 8°		